

**UNIFORM STANDARD
DETAILS**

for

**PUBLIC WORKS
CONSTRUCTION**

**SPONSORED and DISTRIBUTED
by the**



2012 EDITION

ARIZONA

~~AWC~~ Includes ~~GF~~4 revisions)

**100 SERIES: GENERAL INFORMATION**

Detail	Revised	Title
101	2011	GENERAL INFORMATION
110-1	2011	PLAN SYMBOLS (SYMBOLS)
110-2	2011	PLAN SYMBOLS (LINE TYPES)
112	1998	DIMENSIONING FOR ROAD IMPROVEMENT PLANS
120	2014*	SURVEY MARKER
122	2011	PAVEMENT MARKER FOR FIRE HYDRANTS
130	2003	BARRICADES
131	1998	STREET SIGN BASE
140	2009	BOLLARD
141	2009	HAZARD MARKER
145	2011	SAFETY RAIL
150	1998	PRECAST SAFETY CURB
160	2013	6' CHAIN LINK FENCE AND GATE

200 SERIES: STREET INFORMATION

Detail	Revised	Title
200-1	2010	BACKFILL, PAVEMENT AND SURFACE REPLACEMENT
200-2	2010	BACKFILL, PAVEMENT AND SURFACE REPLACEMENT
201	2014*	ASPHALT PAVEMENT EDGE DETAILS
202	1998	ALLEY DETAILS (PAVED AND UNPAVED)
203	1998	SCUPPERS
204	1998	EQUIPMENT CROSSING
205	2006	PAVED TURNOUTS
206-1	2007	CONCRETE SCUPPER
206-2	2007	CONCRETE SCUPPER
206-3	2007	CONCRETE SCUPPER (ISOMETRIC VIEW) RESIDENTIAL
210	2012	SPEED HUMP
211	1998	STANDARD TRENCH PLATING DETAIL
212	2012	UTILITY POTHOLE REPAIR
220-1	2007	CURB AND GUTTER TYPES A, B, C AND D
220-2	2007	CURB AND GUTTER TYPES E AND F
221	2014*	CURB AND GUTTER TRANSITION TYPE A TO TYPE C, INTEGRAL ROLL CURB, GUTTER AND SIDEWALK SINGLE
222	2008	CURB - TYPES A, B AND TERMINATION
223	1998	MEDIAN NOSE TRANSITION
224	1998	JOINT FOR DRAINAGE INLETS AND MANHOLE COVERS
225	2005	CONCRETE PAVERS
230	2014*	SIDEWALKS
234	2012	CURB MODIFICATION AT DETECTABLE WARNING
235-1	2012	CURB RAMPS (TYPE A)
235-2	2012	CURB RAMPS (TYPE B)
235-3	2012	CURB RAMPS (TYPE C)
235-4	2011	CURB RAMPS (TYPE D)
235-5	2011	CURB RAMPS (TYPE E)

200 SERIES: STREET INFORMATION (CONTINUED)

Detail	Revised	Title
240	2010	VALLEY GUTTER
250-1	2014*	DRIVEWAY ENTRANCES WITH DETACHED SIDEWALK
250-2	2013	DRIVEWAY ENTRANCES WITH SIDEWALK ATTACHED TO CURB
251	2003	RETURN TYPE DRIVEWAYS
252	2005	BUS BAYS
260	2013	ALLEY ENTRANCE (WITH VERTICAL CURB AND GUTTER)
262	2012	WING TYPE ALLEY ENTRANCE (WITH COMBINED CURB AND GUTTER)
263	2002	WING TYPE ALLEY ENTRANCE (WITH ROLL TYPE CURB AND GUTTER)
270	2014*	FRAME AND COVER (AND GRADE ADJUSTMENTS)

300 SERIES: WATER INFORMATION

Detail	Revised	Title
301	1998	BLOCKING FOR WATER GATE AND BUTTERFLY VALVES
302-1	1998	JOINT RESTRAINT WITH TIE RODS (DRAWING)
302-2	1998	JOINT RESTRAINT WITH TIE RODS (NOTES)
303-1	1998	JOINT RESTRAINT FOR DUCTILE IRON AND POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES (DRAWING)
303-2	1998	JOINT RESTRAINT FOR DUCTILE IRON AND POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES (TABLES)
310	1998	CAST IRON WATER METER BOX COVER NO. 1
311	1998	CAST IRON WATER METER BOX COVER NO. 2
312	1998	CAST IRON WATER METER BOX COVER NO. 3
313	1998	CAST IRON WATER METER BOX COVER NO. 4
314	1998	CAST IRON WATER METER BOX COVER NO. 5
320	1998	CONCRETE WATER METER BOXES
321	1998	STANDARD WATER METER VAULT
340	2002	INSTALLING TAPPING SLEEVES AND VALVES
342	1998	CONCRETE PRESSURE PIPE TAPPING SLEEVE
345-1	1998	3", 4", 6" WATER METER
345-2	1998	4", 6" WATER METER WITH ON-SITE HYDRANTS
346	1998	FIRE LINE DETECTOR CHECK VAULT
360-1	2013	DRY BARREL FIRE HYDRANT INSTALLATION
360-2	2013	WET BARREL FIRE HYDRANT INSTALLATION
360-3	2013	FIRE HYDRANT INSTALLATION DETAILS
362	1999	LOCATIONS FOR NEW FIRE HYDRANTS
370	1998	VERTICAL REALIGNMENT OF WATER MAINS
380	1998	THRUST BLOCKS FOR WATER LINES
381	1998	ANCHOR BLOCKS FOR VERTICAL BENDS
389	2001	CURB STOP WITH VALVE BOX AND COVER
390	1998	CURB STOP WITH FLUSHING PIPE
391-1	2014*	VALVE BOX INSTALLATION AND GRADE ADJUSTMENT
391-2	2001	VALVE BOX INSTALLATION AND GRADE ADJUSTMENT
392	2001	DEBRIS CAP INSTALLATION

* NEWLY REVISED.

DETAIL NO.

100-1STANDARD DETAIL
ENGLISH**INDEX (PAGE 1 OF 2)**

REVISED

01-01-2014

DETAIL NO.

100-1

**400 SERIES: SEWER INFORMATION**

Detail	Revised	Title
403-1	1998	PIPE SUPPORT ACROSS TRENCHES
403-2	1998	PIPE SUPPORT ACROSS TRENCHES
403-3	1998	ALTERNATIVE TO PIPE SUPPORT
404-1	2006	WATER AND SANITARY SEWER SEPARATION/PROTECTION
404-2	2006	WATER AND SANITARY SEWER SEPARATION/PROTECTION
404-3	2006	WATER AND SANITARY SEWER SEPARATION/PROTECTION
405	1998	BROKEN SEWER LINE REPLACEMENT
420-1	2004	PRE-CAST CONCRETE SEWER MANHOLE
420-2	2001	PRE-CAST CONCRETE SEWER MANHOLE
421	2012	OFFSET MANHOLE 8" TO 30" PIPE
422	2012	BRICK SEWER MANHOLE AND COVER FRAME ADJUSTMENT
423-1	2012	24" CAST IRON MANHOLE FRAME AND COVER
423-2	2012	30" CAST IRON MANHOLE FRAME AND COVER
424-1	2012	24" CAST IRON WATERTIGHT MANHOLE FRAME AND COVER
424-2	2012	30" CAST IRON WATERTIGHT MANHOLE FRAME AND COVER
425	1998	24" ALUMINUM MANHOLE FRAME AND COVER
426	2007	DROP SEWER CONNECTIONS
427	1998	STUB OUT AND PLUGS
428	1998	MANHOLE STEPS
429	1998	INDUSTRIAL WASTE CONTROL VAULT WITH MANHOLE
440-1	2007	TYPE 'A' SEWER BUILDING CONNECTION - ELECTRONIC BALL MARKERS (STANDARD)
440-2	2007	TYPE 'B' SEWER BUILDING CONNECTION - TWO-WAY CLEANOUT AND METER BOX AT R/W
440-3	2007	TYPE 'C' SEWER BUILDING CONNECTION - ONE-WAY CLEANOUT AND METER BOX
440-4	2006	SEWER SERVICE CURB CROSSING STAMP DETAIL
441	2001	SEWER CLEANOUT

500 SERIES: IRRIGATION AND STORM DRAIN INFORMATION

Detail	Revised	Title
501-1	2012	HEADWALL
501-2	2012	HEADWALL
501-3	1998	HEADWALL 42" TO 84" PIPE
501-4	1998	HEADWALL IRRIGATION 18" TO 60" PIPE
501-5	2014*	HEADWALL DROP INLET
502-1	1998	TRASH RACK
502-2	2004	TRASH RACK
503	1998	IRRIGATION STANDPIPE
504	1998	CONCRETE BLOCK JUNCTION BOX
505	1998	CONCRETE PIPE COLLAR
506	1998	IRRIGATION VALVE INSTALLATION
507	1998	ENCASED CONCRETE PIPE (FOR SHALLOW INSTALLATION)
510	1998	CORRUGATED METAL PIPE AND INSTALLATION

500 SERIES: IRRIGATION AND STORM DRAIN INFORMATION (CONTINUED)

Detail	Revised	Title
520	1998	STORM DRAIN MANHOLE BASE (48" AND SMALLER)
521	1998	STORM DRAIN MANHOLE BASE (51" OR LARGER)
522	1998	STORM DRAIN MANHOLE SHAFT
523-1	1998	PRESSURE MANHOLE
523-2	1998	PRESSURE MANHOLE
524	1998	STORM DRAIN LATERAL PIPE CONNECTIONS
530	1998	3'-6" CURB OPENING CATCH BASIN - TYPE 'A'
531	1998	5'-6" CURB OPENING CATCH BASIN - TYPE 'B'
532	1998	8'-0" CURB OPENING CATCH BASIN - TYPE 'C'
533-1	1998	CATCH BASIN TYPE 'D'
533-2	1999	APRON FOR TYPE 'D' CATCH BASIN
533-3	2007	FRAME AND GRATE FOR TYPE 'D' CATCH BASIN
533-4	2007	7'-0" CURB OPENING CATCH BASIN TYPE 'D' - GRATE DETAILS
534-1	1998	CATCH BASIN TYPE 'E'
534-2	1998	CATCH BASIN TYPE 'E' (DETAILS)
534-3	1998	CATCH BASIN TYPE 'E' (DETAILS)
534-4	1998	CATCH BASIN TYPE 'E' (DETAILS)
534-5	1998	ALTERNATE GRATE STYLES, SUMP LOCATION
535	2009	CATCH BASIN TYPE 'F' (FOR USE WITHOUT CURB)
536-1	1999	COMMON DETAILS AND SECTIONS FOR CURB OPENING CATCH BASINS
536-2	1998	ALTERNATIVE COVER FOR CURB OPENING CATCH BASINS
537	2002	CATCH BASIN TYPE 'G'
538	1998	CATCH BASIN TYPE 'H'
539	1998	GRATES FOR CATCH BASINS, TYPE G AND H
540-1	1998	CATCH BASIN GRATES
540-2	1998	CATCH BASIN GRATES
541	2005	CATCH BASIN SUBGRADE DRAIN
545	1998	END SECTION - REINFORCED CONCRETE PIPE
550	1998	SPILLWAY INLET AND OUTLET
552	2009	CONCRETE CUT-OFF WALLS
555	2010	EROSION PROTECTION/GABIONS

* NEWLY REVISED.

DETAIL NO.

100-2STANDARD DETAIL
ENGLISH**INDEX (PAGE 2 OF 2)**

REVISED

01-01-2014

DETAIL NO.

100-2

1. THESE DETAILS HAVE BEEN PREPARED IN AN EFFORT TO STANDARDIZE THE CONSTRUCTION DETAILS USED BY VARIOUS CONTRACTING AGENCIES IN MARICOPA COUNTY. THEY ARE TO BE USED IN CONJUNCTION WITH THE CURRENT EDITION OF THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION" SPONSORED AND DISTRIBUTED BY THE MARICOPA ASSOCIATION OF GOVERNMENTS.
2. MANY NOTES WITHIN THESE DETAILS REFER TO VARIOUS SECTIONS OF THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION." WHERE THIS REFERENCE IS MADE, ONLY THE ABBREVIATION "SECT." IS USED. AN EXAMPLE OF THIS REFERENCE WOULD BE: "CLASS 'A' CONCRETE PER SECT. 725."
3. MANY NOTES WITHIN THESE DETAILS REFER TO OTHER DETAILS WITHIN THIS BOOK. WHERE THIS REFERENCE IS MADE, THE ABBREVIATION "DETAIL" IS USED. AN EXAMPLE OF THIS WOULD BE: "SEE DETAIL 391 FOR VALVE BOX INSTALLATION."
4. MANY DETAILS COVER MORE THAN ONE SHEET. THESE SHEETS HAVE BEEN GIVEN THE SAME NUMBER WITH A SUFFIX NUMBER, EXAMPLE: 391-1 AND 391-2.
5. AN EFFORT HAS BEEN MADE TO INCLUDE THE MOST COMMONLY USED CONSTRUCTION DETAILS IN THIS BOOK. ITEMS WHICH REQUIRE DESIGN CONSIDERATION BY THE DESIGNING ENGINEER HAVE NOT BEEN INCLUDED.
6. SOME OF THE DETAILS PRINTED HEREIN MAY BE USED BY SOME OF THE AGENCIES BUT NOT OTHERS. THE DESIGNING ENGINEER SHOULD THEREFORE CONTACT THE AGENCY WITHIN WHOSE JURISDICTION HE IS WORKING FOR DIRECTION AS TO WHICH DETAIL OR PORTIONS OF DETAILS SHOULD BE USED.
7. DETAIL DRAWINGS ARE NOT TO SCALE.

DETAIL NO.

101



MARICOPA
ASSOCIATION of
GOVERNMENTS

STANDARD DETAIL
ENGLISH

GENERAL INFORMATION

REVISED

01-01-2011

DETAIL NO.

101

SEWER CLEANOUT



FIRE HYDRANT



WATER METER



UTILITY MANHOLE



IRRIGATION STANDPIPE



UTILITY VALVE




SEWER SERVICE CONNECTION



MONITORING WELL



REDUCER



WOOD UTILITY POLE



STEEL UTILITY POLE



CONCRETE UTILITY POLE



STREET LIGHT ON MAST ARM



POLE MOUNTED LIGHT




ELECTRIC, GAS METER



TRANSFORMER



DOWN GUY & ANCHOR



SURVEY MONUMENT



SURVEY MONUMENT IN HANDHOLE



MAIL BOX



SIGNAL POLE



SINGLE POST SIGN



DOUBLE POST SIGN



STREET NAME SIGN



VIDEO DETECTION CAMERA



PULL BOX



CELLULAR TOWER



BITUMINOUS (SECTION)




CONCRETE (SECTION)




AGGREGATE BASE COURSE (SECTION)




RIPRAP (PLAN & SECTION)



OBLITERATE PAVEMENT




TAPERED MILL



UNIFORM MILL



EARTH (SECTION)



NOTES:

1. PLAN SYMBOLS FOR EXISTING FEATURES ARE TO BE DASHED, GRAY SCALED, OR DRAWN USING THIN LINEWORK.

2. ADD LABELS TO PLAN SYMBOLS AS NEEDED FOR CLARITY.

DETAIL NO.

110-1



STANDARD DETAIL
ENGLISH

PLAN SYMBOLS

REVISED

01-01-2011


DETAIL NO.

110-1

SECTION LINE



R/W



EASEMENT



PROPERTY LINE (OPTION 1)



PROPERTY LINE (OPTION 2)



JURISDICTIONAL BOUNDARY (OPTION 1)




JURISDICTIONAL BOUNDARY (OPTION 2)




ROADWAY CENTERLINE



UNDERGROUND ELECTRIC BURIED CABLE



UNDERGROUND ELECTRIC CONDUIT



UNDERGROUND ELECTRIC DUCT BANK



OVERHEAD ELECTRIC




UNDERGROUND TELEPHONE LINE



OVERHEAD TELEPHONE LINE




FIBER OPTIC



CABLE TELEVISION



OVERHEAD CABLE TELEVISION



TELEPHONE DUCT BANK




CHAIN LINK FENCE



BARBED WIRE FENCE



BLOCK WALL



WOOD FENCE



GAS LINE (12" & SMALLER)



GAS LINE * (GREATER THAN 12")



SEWER LINE (12" & SMALLER)



SEWER LINE * (GREATER THAN 12")



NEW STORM DRAIN PIPE *



STORM DRAIN * (GREATER THAN 12")



IRRIGATION LINE (12" & SMALLER)



IRRIGATION LINE * (GREATER THAN 12")



NEW IRRIGATION LINE *



WATER LINE (12" & SMALLER)



WATER LINE * (GREATER THAN 12")



* SCALE TO ACTUAL WIDTH

DETAIL NO.

110-2



STANDARD DETAIL
ENGLISH


PLAN SYMBOLS

REVISED

01-01-2011

DETAIL NO.

110-2

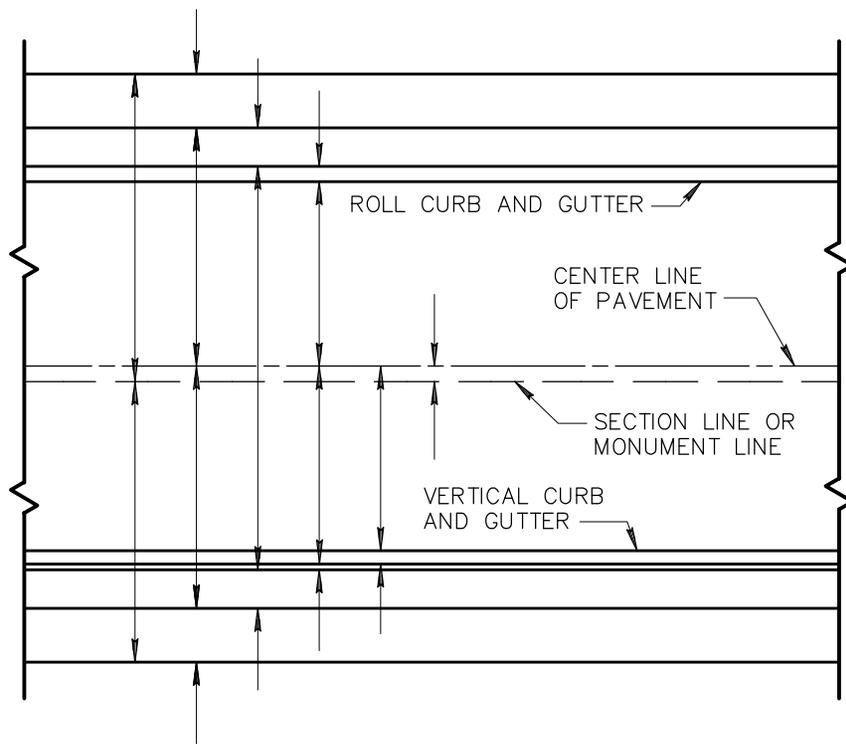

DIMENSION SHOULD BE GIVEN ONCE ON EACH SHEET AND SHOULD BE PLACED NEAR THE CENTER OF THE SHEET. IF ANY OF THE GIVEN CONDITIONS CHANGE, THEY SHOULD BE REDIMENSIONED AT THE POINT OF CHANGE.

GIVEN DIMENSIONS IN ORDER STARTING WITH THE LONGEST AND ENDING WITH THE SHORTEST, AS SHOWN IN THE SKETCH.

GIVE COMPLETE DIMENSIONS.

IF THE CENTERLINE OF PAVEMENT DOES NOT FALL ON THE SECTION LINE OR MONUMENT LINE OF THE STREET, DIMENSION AS ABOVE AND SHOW THE DIFFERENCE BETWEEN THE SECTION OR MONUMENT LINE AND THE CENTERLINE.

DETAIL NO.

112



MARICOPA
ASSOCIATION of
GOVERNMENTS

STANDARD DETAIL
ENGLISH


DIMENSIONING FOR ROAD IMPROVEMENT PLANS

REVISED


01-01-1998

DETAIL NO.

112

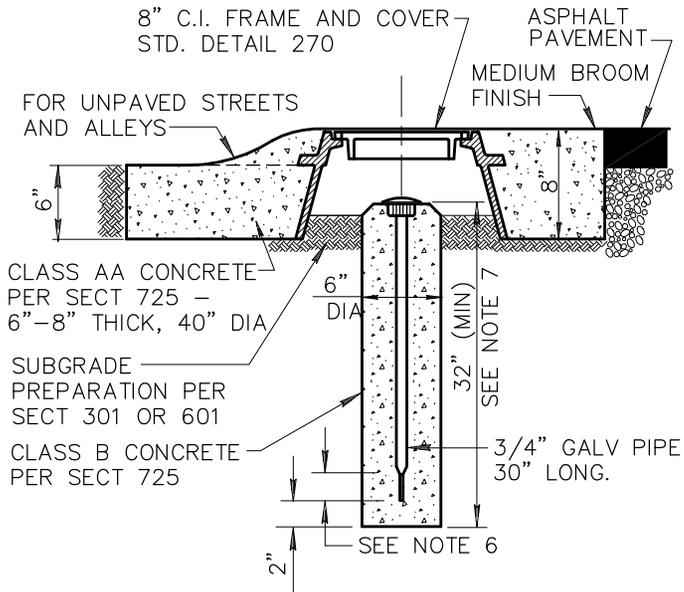

TYPE 'A'
(WITH FRAME)

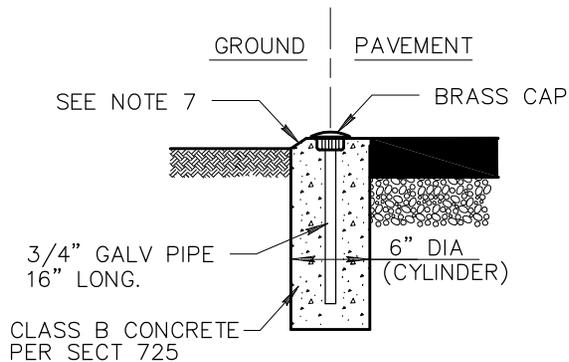


TYPE 'B'
(WITHOUT FRAME)


NOTES:

1. TYPE 'A' TO BE USED AT INTERSECTIONS OF MAJOR STREETS & COLLECTOR STREETS, SECTION CORNERS, SECTION 1/4 CORNERS, CENTER OF SECTIONS, AND AT OTHER POINTS AS SHOWN ON PLANS.
2. TYPE 'B' TO BE USED (EXCEPT WHERE TYPE 'A' IS SPECIFIED) AT INTERSECTION OF STREET CENTERLINES, PC'S, PT'S AND PI'S OF CURVES, SECTION 1/16 CORNERS, SUBDIVISION CORNERS, CHANGE IN ALIGNMENT OF SUBDIVISION BOUNDARIES, AND AT OTHER POINTS AS SHOWN ON PLANS.
3. TYPE 'C' TO BE USED AT CORNERS OF AND CHANGE IN ALIGNMENT OF SUBDIVISION BOUNDARIES WHERE CORNERS OR CHANGES IN ALIGNMENT FALL OUTSIDE OF PAVED AREAS OR UNPAVED ALLEYS AND STREETS.
4. CAP TO BE CONSTRUCTED OF RED BRASS OR BRONZE.
5. LETTERS TO BE APPROX. 1/32" WIDE & 1/32" DEEP.
6. FLATTENING THE BOTTOM 2" OF THE GALVANIZED PIPE IS OPTIONAL.
7. TOP OF CONCRETE POST IS CHAMFERED 3/4" EXCEPT WHEN SET FLUSH WITH PAVEMENT.
8. THE CAP SHALL SHOW THE POINT SURVEYED BY A PUNCH MARK OR SCRIBED CROSS AND THE CAP SHALL BE STAMPED WITH THE YEAR AND THE REGISTERED LAND SURVEYOR'S (RLS) REGISTRATION NUMBER.
9. WHEN APPLICABLE, THE CAP SHALL BE STAMPED WITH THE APPROPRIATE PUBLIC LAND MARKING PER CURRENT MANUAL OF INSTRUCTIONS FOR THE SURVEY OF PUBLIC LANDS OF THE UNITED STATES, PREPARED BY THE BUREAU OF LAND MANAGEMENT.
10. SUBMIT TO THE ENGINEER A COPY OF THE RECORDED CORNER RECORD OR RESULTS OF SURVEY TO DOCUMENT COMPLIANCE WITH THE ARIZONA BOARD OF TECHNICAL REGISTRATION REQUIREMENTS.

1/16" BORDER FROM EDGE OF CAP TO TOP OF 1/4" LETTERING.

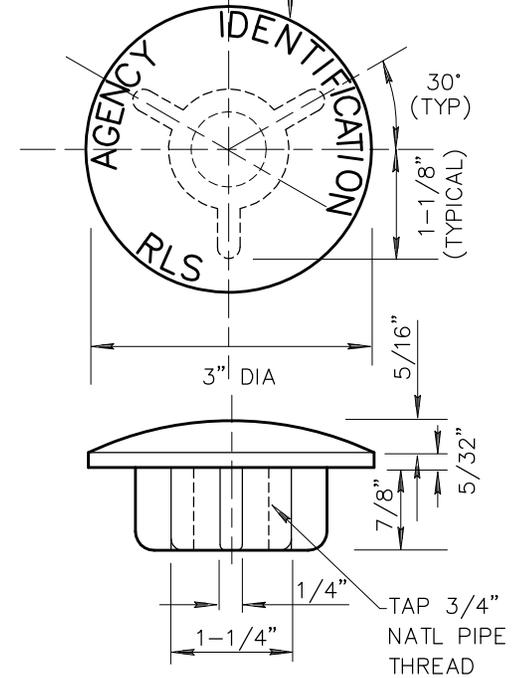

CAP DETAIL

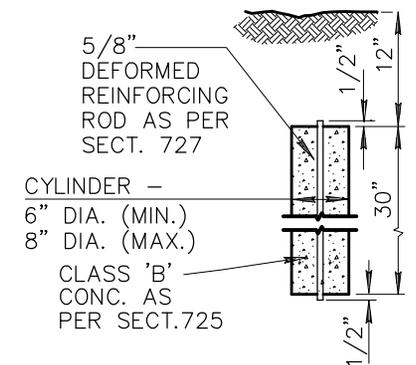

TYPE 'C'

This Page Is Reserved for Future Use.


DETAIL NO.




STANDARD DETAIL
ENGLISH

REVISED


DETAIL NO.

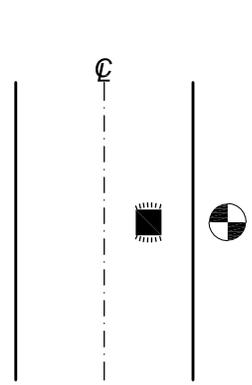


LOCAL STREET

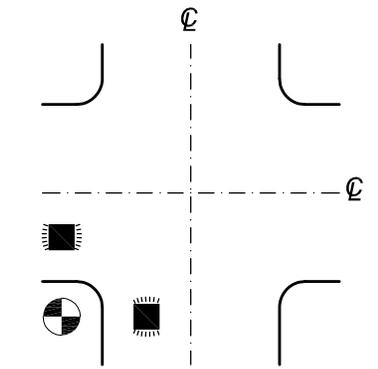


LOCAL CROSS STREET INTERSECTION

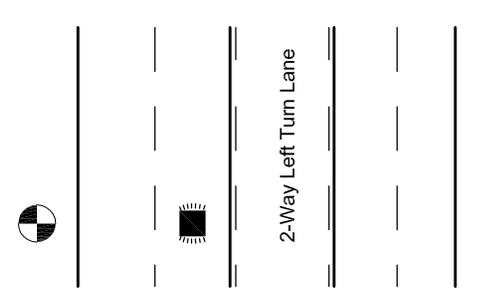


MULTI-LANE STREET W/ TWO WAY LEFT TURN LANE

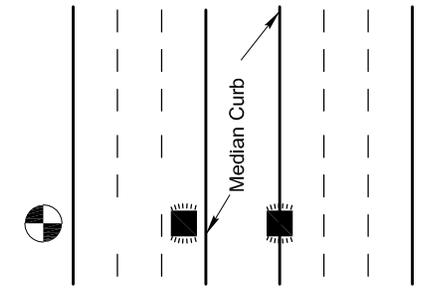

MULTI-LANE STREET W/ RAISED MEDIAN

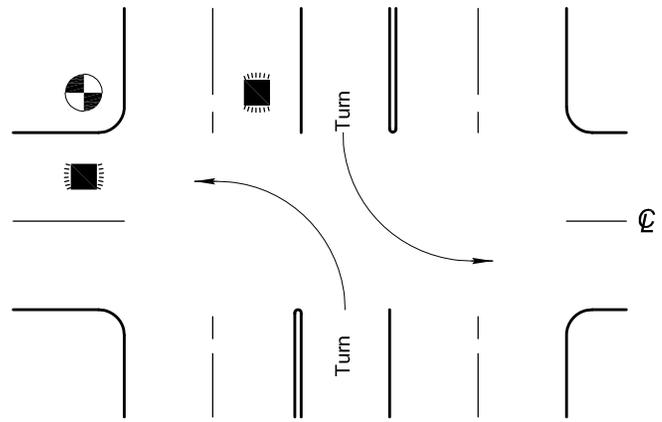





FOUR LANE STREET WITH TURN LANE AT INTERSECTION

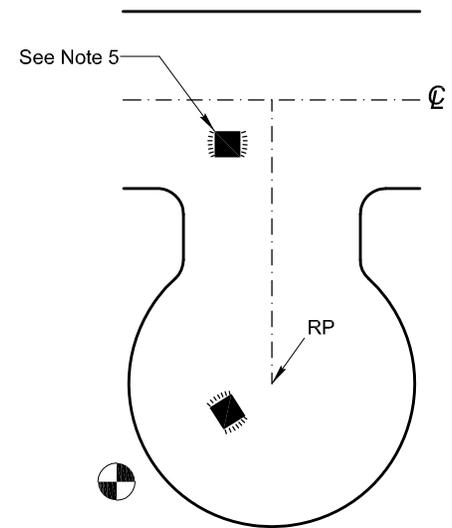


CUL-DE-SAC

NOTES:

1. LOCATE PAVEMENT MARKER IN CENTER OF TRAVEL LANE AND ALIGN WITH HYDRANT.
2. FOR MULTIPLE LANE ROADS LOCATE PAVEMENT MARKER IN LEFT MOST THROUGH TRAFFIC LANE.
3. ADJUST MARKER LOCATION TO BE LOCATED OUTSIDE OF ANY DELINEATED CROSSWALK AREA.
4. FOR HYDRANT LOCATED ON FAR SIDE OF RAISED MEDIAN, LOCATE PAVEMENT MARKER ON TOP OF MEDIAN CURB ALIGNED WITH HYDRANT.
5. OMIT FOR CUL-DE-SAC GREATER THAN 250' IN LENGTH.
6. FIRE HYDRANT PAVEMENT MARKERS SHALL BE 2-WAY RETROREFLECTIVE BLUE: ADOT TYPE BB, 911A-BLUE BY FIRE LITE AMERACE CORPORATION, OR APPROVED EQUAL.

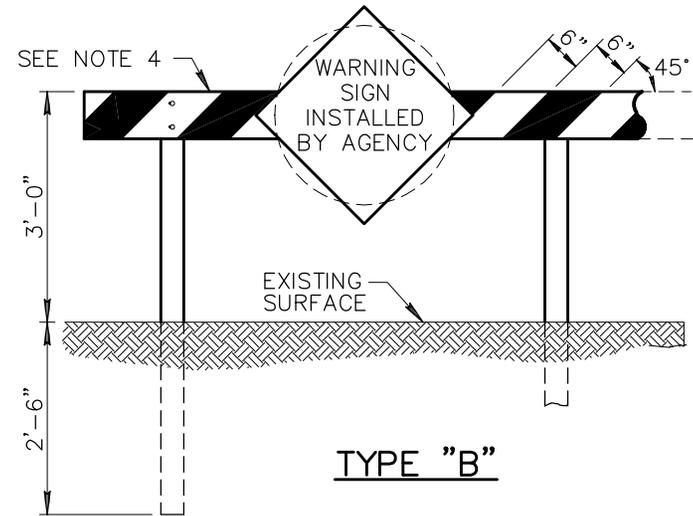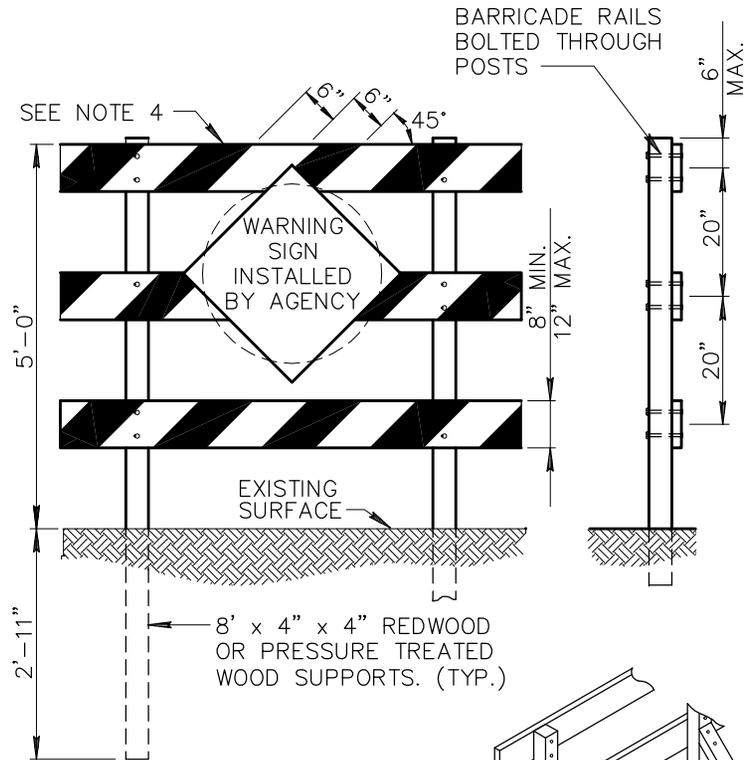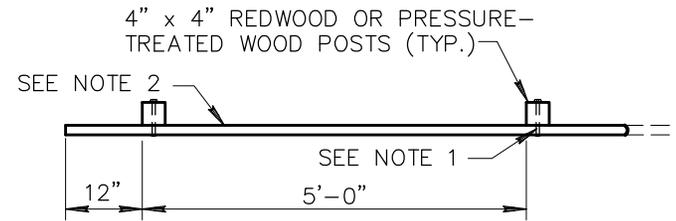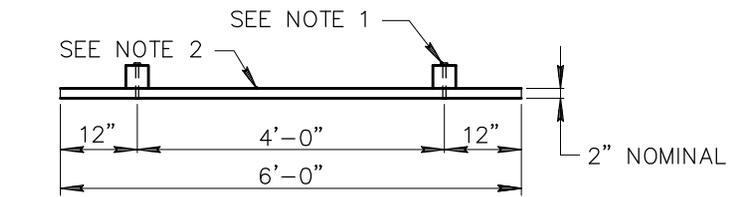

TYPE "A"

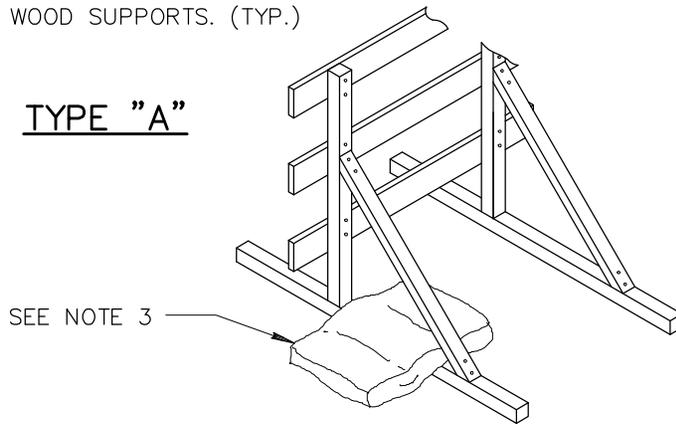


NOTES:

1. FASTEN WITH 1/2" x 5" LAG SCREWS WITH 2 FLAT WASHERS OR (2) 5/8" BOLTS, WITH 4 FLAT WASHERS.
2. 2" x 8" DOUGLAS FIR PLANK (LENGTH TO BE DETERMINED ON PLANS.)
3. WHEN BARRICADE (TYPE "A") IS CONSTRUCTED ON BASES INSTEAD OF POSTS SET INTO THE GROUND, IT MAY BE DESIRABLE TO BALLAST THE BASES WITH SAND BAGS OR BY STAKING TO PROVIDE RESISTANCE TO OVERTURNING DURING PERIODS OF HIGH WINDS.
4. TWO COATS OF WHITE PAINT PER SECTION 790 SHALL BE APPLIED TO ALL EXPOSED SURFACES OF THE BARRICADE. AN ADDITIONAL TWO COATS OF ORANGE PAINT PER SECTION 790 SHALL BE APPLIED TO CREATE THE ALTERNATE ORANGE AND WHITE STRIPES FOR TEMPORARY BARRICADES AND TWO COATS OF RED PAINT PER SECTION 790 SHALL BE APPLIED TO CREATE ALTERNATE RED AND WHITE STRIPES FOR PERMANENT BARRICADES. HIGHWAY SAFETY SPHERES (BEADS) PER ADOT 708-2.02 SHALL BE APPLIED BY HAND TO ALL CROSS MEMBERS, FRONT AND BACK AND ON BOTH COLORS, IMMEDIATELY AFTER PAINTING. THE STRIPES SHALL SLOPE DOWNWARD IN THE DIRECTION TRAFFIC IS TO PASS.


FLANGED STEEL 'U' CHANNEL (2 LBS. OR 3 LBS. PER SQUARE FOOT AS SPECIFIED)

2-1/2" DIA. STANDARD PIPE GALVANIZED OR 2-3/8" O.D. STANDARD PIPE GALVANIZED (AS SPECIFIED)


2" DIA. STANDARD PIPE GALVANIZED

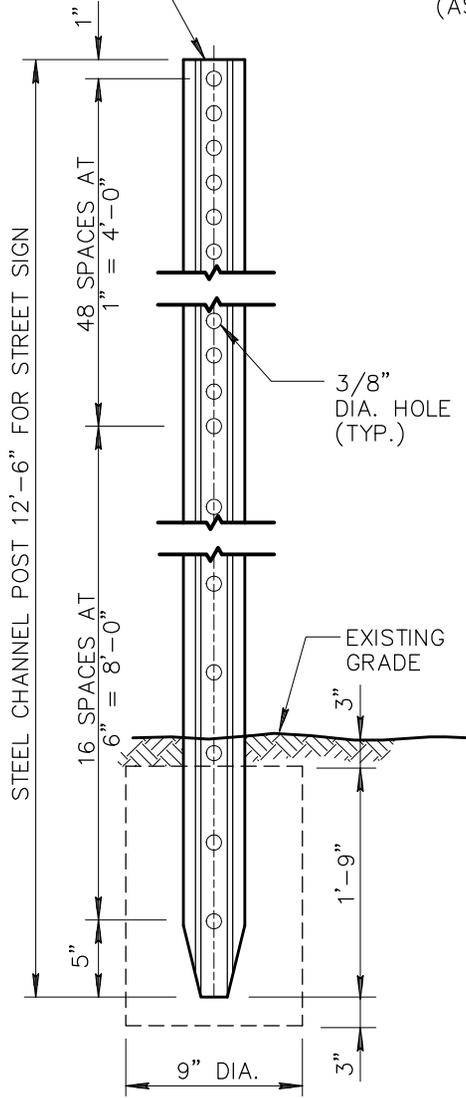

TYPE 'A'

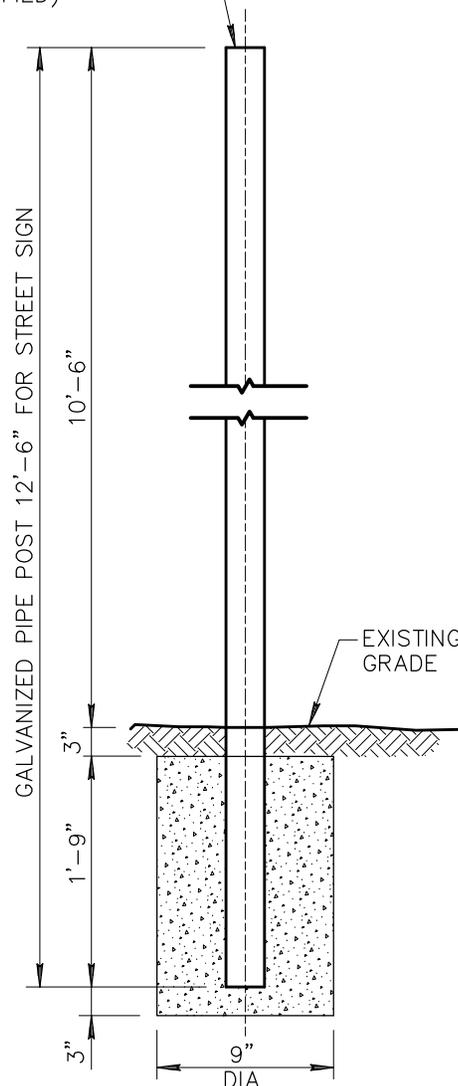

TYPE 'B'

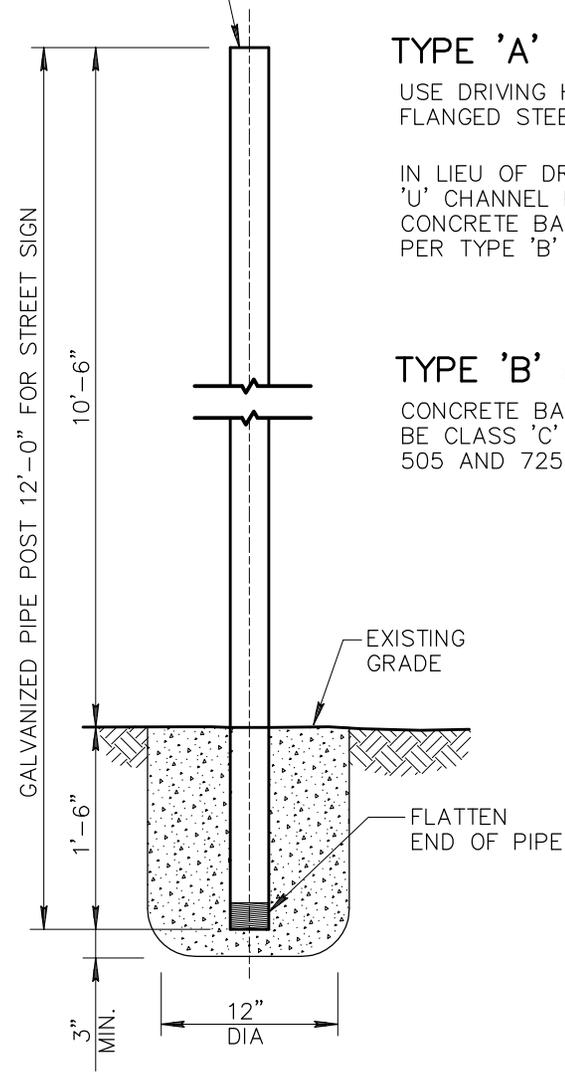

TYPE 'C'

NOTES


TYPE 'A'

USE DRIVING HEAD FOR DRIVING ALL FLANGED STEEL 'U' CHANNEL POSTS.


IN LIEU OF DRIVING FLANGED STEEL 'U' CHANNEL POSTS MAY BE SET IN CONCRETE BASE FOUNDATION AS PER TYPE 'B' BASE.

TYPE 'B' & TYPE 'C'

CONCRETE BASE FOUNDATIONS SHALL BE CLASS 'C' CONCRETE AS PER SECT. 505 AND 725.

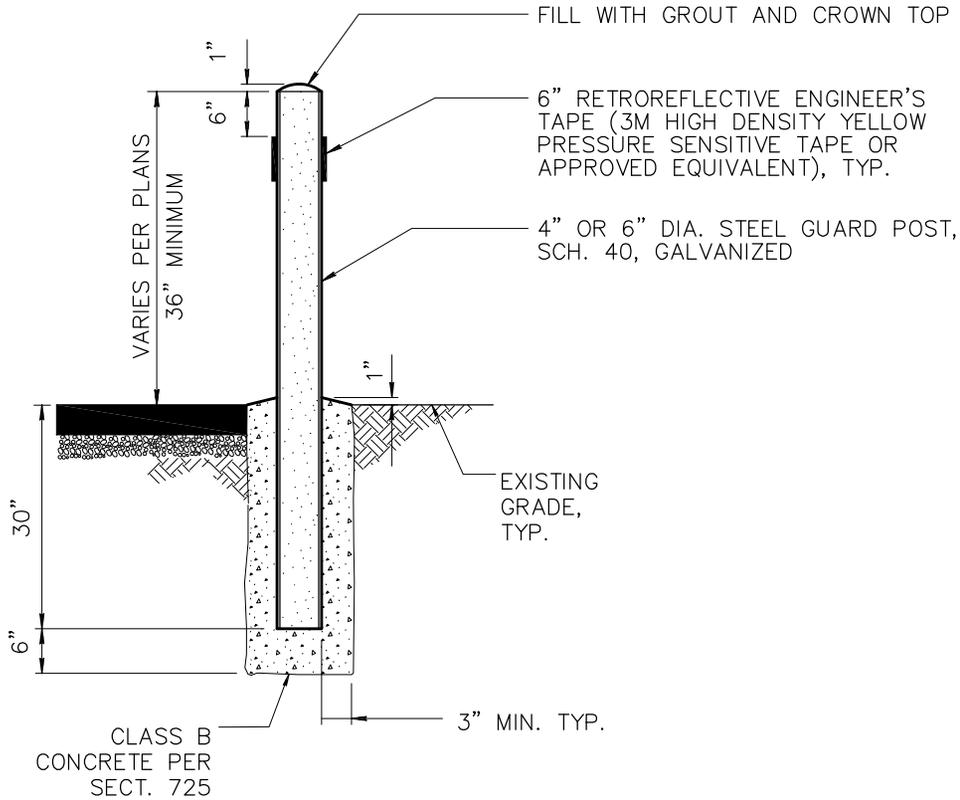

TYPE 1 PERMANENT

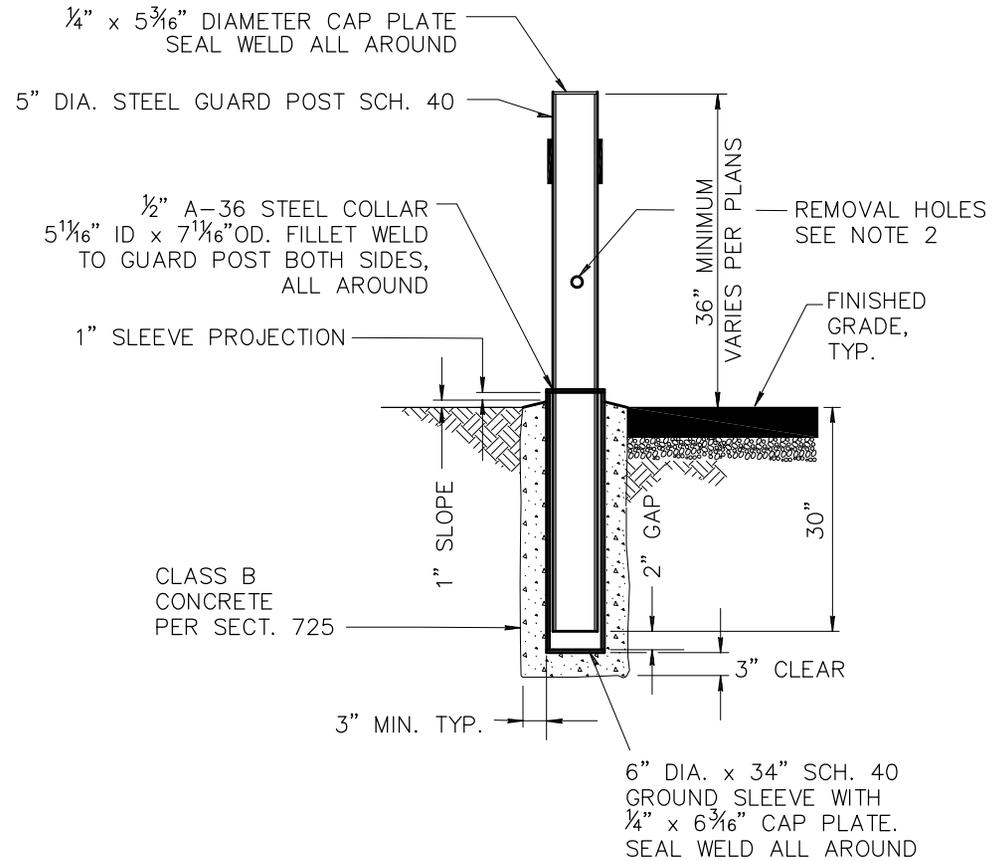

TYPE 2 REMOVABLE

NOTES

1. BOLLARDS SHALL HAVE A HEIGHT OF 3 FEET OR BE EQUAL TO THE HEIGHT OF THE BACK SCREEN WALL OF BIN ENCLOSURES. POSTS SHALL BE PLACED A MINIMUM OF 4" FROM THE WALL.
2. REMOVABLE POSTS SHALL HAVE 1" DIA. HOLES DRILLED THROUGH AT A DISTANCE $\frac{1}{3}$ THE OVERALL POST LENGTH FROM TOP.
3. REMOVABLE POST - GRIND SMOOTH ALL SHARP EDGES PRIOR TO GALVANIZATION. GALVANIZE PER ASTM A54 AFTER FABRICATION.

DETAIL NO.

140



STANDARD DETAIL
ENGLISH


BOLLARD

REVISED


01-01-2009

DETAIL NO.

140

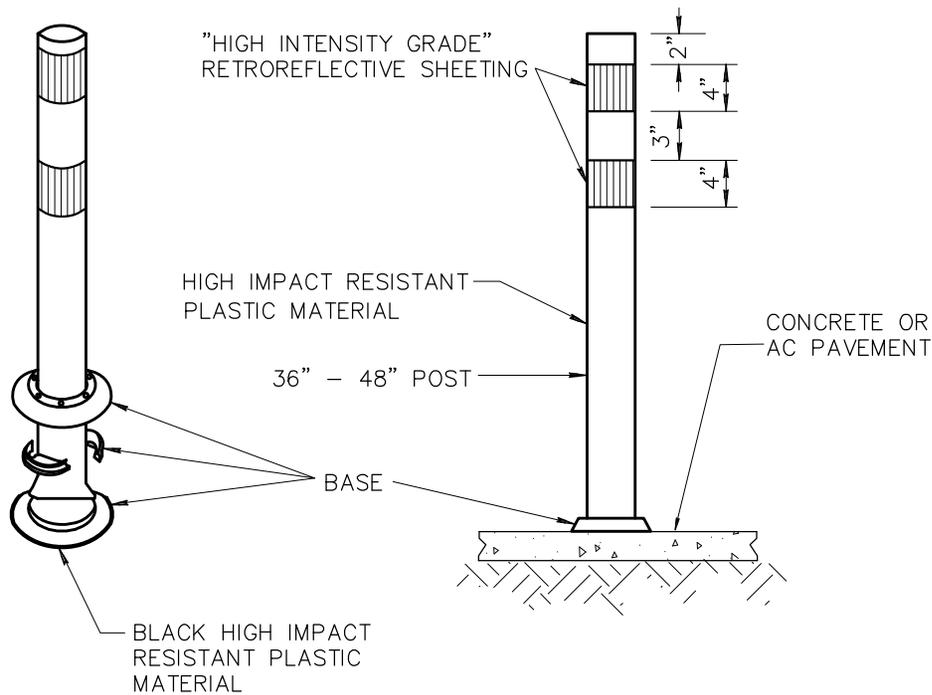

TYPE 1 SURFACE MOUNT

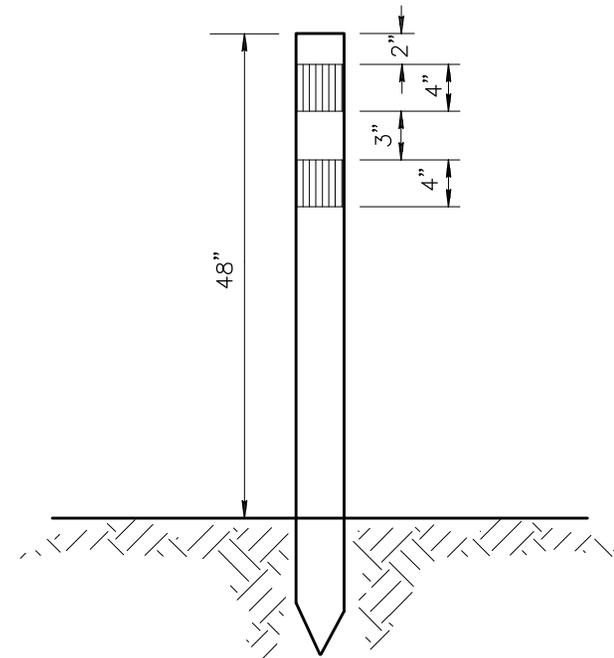

TYPE 2 GROUND MOUNT

NOTES

1. CONTRACTOR SHALL CLEAN ROADWAY SURFACE PRIOR TO PLACEMENT OF FLEXIBLE TUBULAR MARKER.
2. FLEXIBLE TUBULAR MARKERS SHALL BE CEMENTED TO THE PAVEMENT SURFACE WITH AN EPOXY ADHESIVE IN ACCORDANCE WITH THE TUBULAR MARKER MANUFACTURER'S SPECIFICATIONS.
3. YELLOW TUBULAR MARKERS SHALL HAVE A YELLOW POST AND YELLOW "HIGH INTENSITY GRADE" RETROREFLECTIVE SHEETING. ORANGE TUBULAR MARKERS SHALL HAVE AN ORANGE POST AND WHITE HIGH INTENSITY RETROREFLECTIVE SHEETING.
4. POST SHALL BE FLEXIBLE, HIGH IMPACT RESISTANT PLASTIC MATERIAL.

DETAIL NO.

141




STANDARD DETAIL
ENGLISH

HAZARD MARKER

REVISED
01-01-2009

DETAIL NO.


141

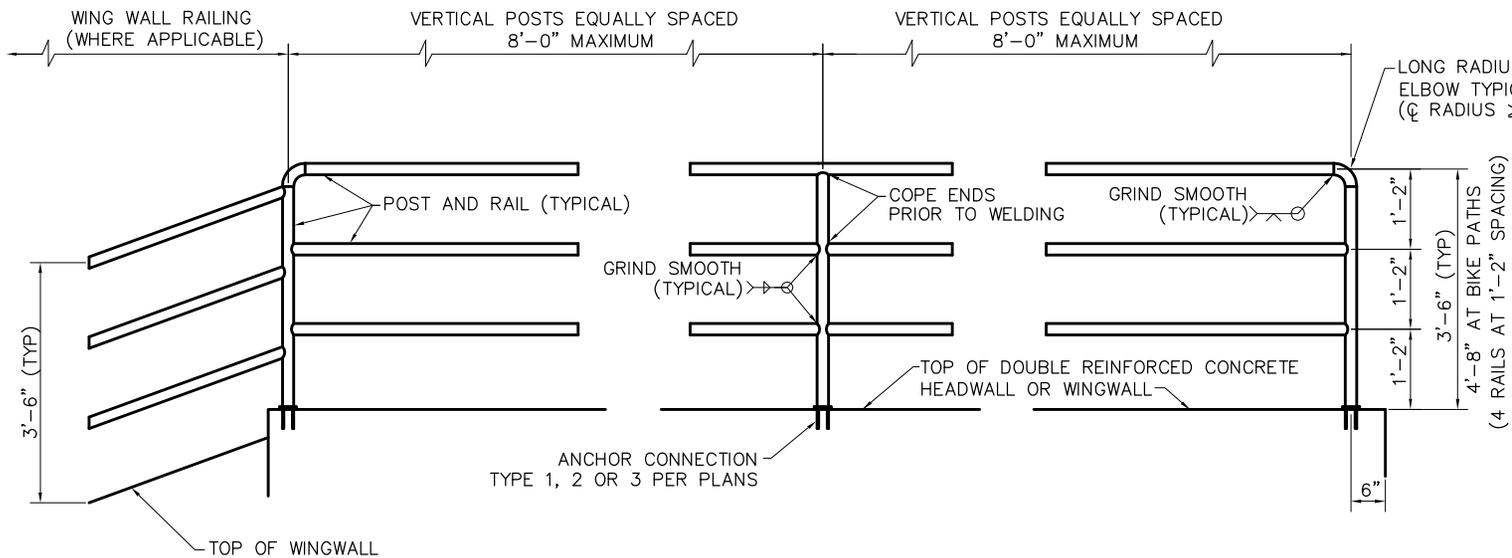

ELEVATION


NOTES:

1. POSTS AND RAILS SHALL BE 1.5" SCHEDULE 40 HOT-DIPPED GALVANIZED STEEL PIPE ASTM A 53, GRADE B (2.72 #/LF, 1.9" O.D.). GALVANIZING SHALL BE IN ACCORDANCE WITH SECTION 771.
2. PAINT RAIL PER MAG SPECIFICATIONS SECTION 530 WHEN REQUIRED BY PLANS. SHOP PRIME WITH RUST INHIBITING PRIMER (FIELD REPAIR PRIMER AS NEEDED). COLOR PER PLANS.
3. VERTICAL POSTS TO BE EVENLY SPACED.
4. REMOVE ALL SHARP EDGES.
5. INSTALL SAFETY RAIL AS REQUIRED BY PLANS OR SPECIFICATIONS.
6. THE EMBEDMENT FOR ANCHOR TYPES 1, 2 AND 3 SHALL BE LOCATED INSIDE THE WALL REINFORCEMENT CAGE.
7. SAFETY RAIL IS NOT TO BE USED AS A PEDESTRIAN BRIDGE RAIL.

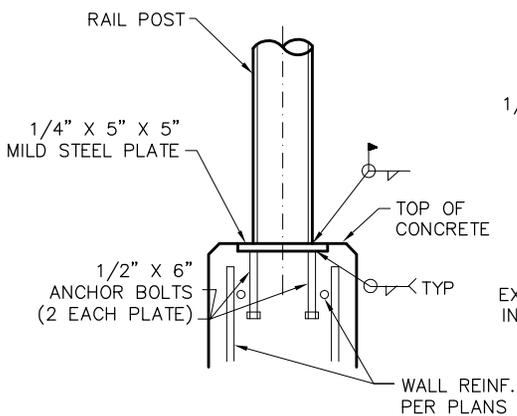


TYPE 1

ANCHOR PLATE DETAIL

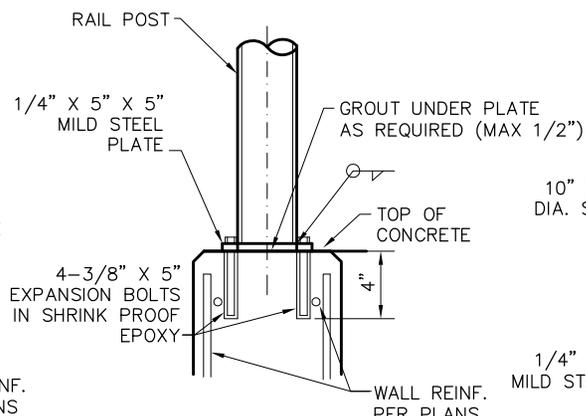


TYPE 2

EXPANSION BOLT DETAIL

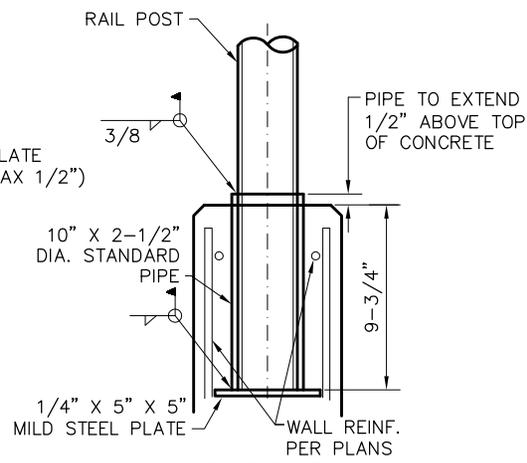

TYPE 3

PIPE SLEEVE DETAIL

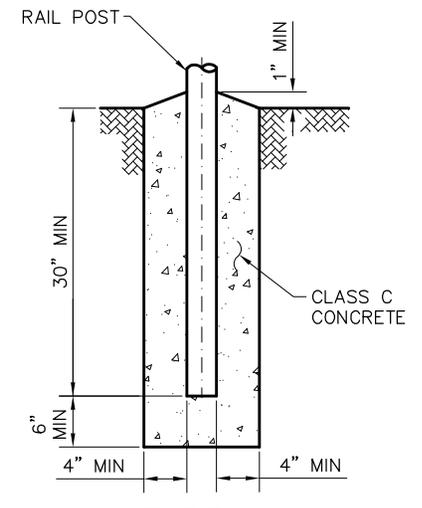

TYPE 4

GROUND INSTALLATION DETAIL

NOTE: SEE PLANS FOR ANCHORAGE DETAILS FOR ATTACHMENT TO SINGULARLY REINFORCED AND NON-REINFORCED WALLS.

DETAIL NO.

145



STANDARD DETAIL
ENGLISH


SAFETY RAIL

REVISED


01-01-2011

DETAIL NO.

145

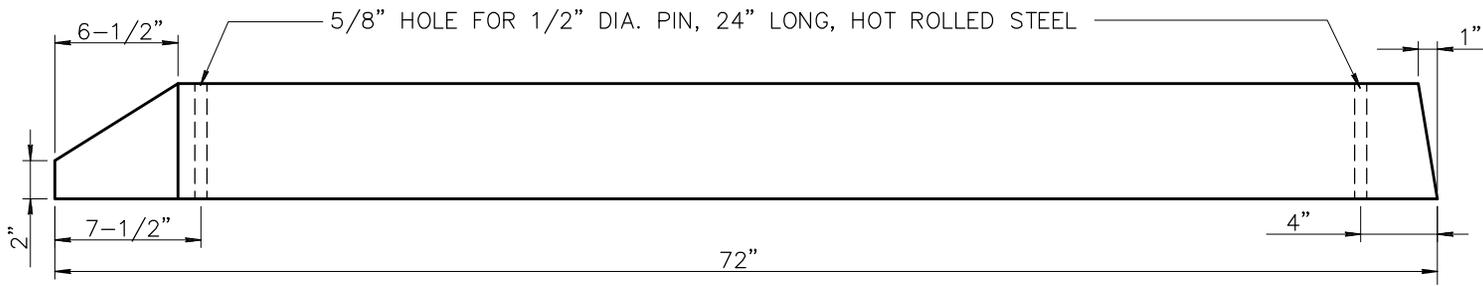

TYPE A

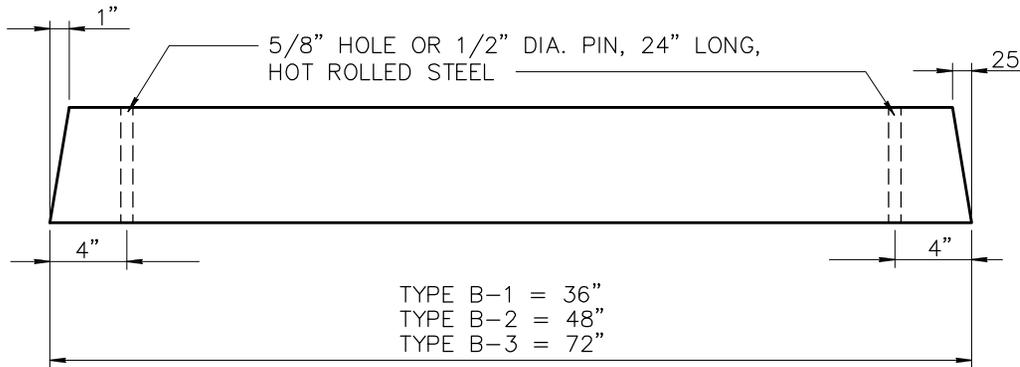


TYPE B-1 = 36"
 TYPE B-2 = 48"
 TYPE B-3 = 72"

TYPE B-1, B-2, AND B-3


NOTES:

1. DIMENSIONAL AND REINFORCEMENT CHANGES WILL BE PERMITTED UPON PRIOR WRITTEN APPROVAL OF THE ENGINEER.
2. UNLESS OTHERWISE NOTED, CONCRETE SHALL BE CLASS 'A' PER SECTION 725.

1/2" DIA. PINS -
 24" LONG, HOT
 ROLLED STEEL

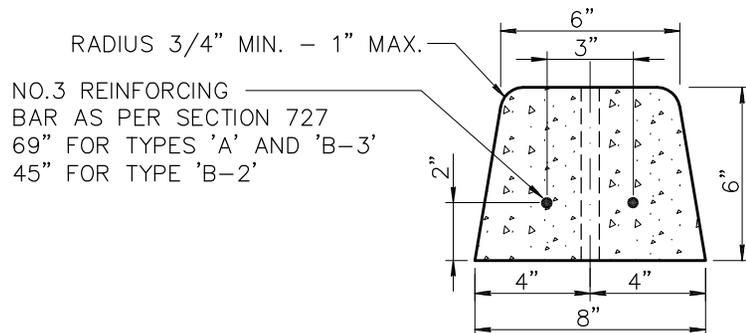

TYPICAL SECTION

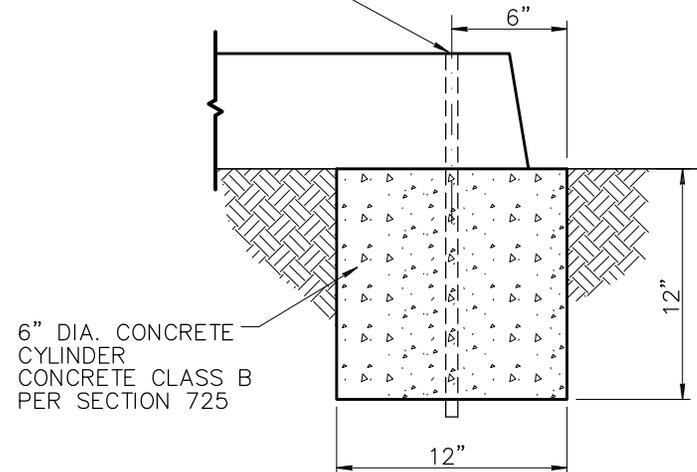

**SAFETY CURB
 INSTALLATION ON DIRT**

DETAIL NO.

150



STANDARD DETAIL
 ENGLISH

PRECAST SAFETY CURB

REVISED

01-01-1998

DETAIL NO.



150

NOTES

1. ALL CONCRETE SHALL BE CLASS 'C' PER SECT. 725.
2. FITTINGS NOT SPECIFICALLY DETAILED SHALL BE HEAVY DUTY DESIGN.
3. STRAIN POSTS SHALL BE SPACED AT 500' MAXIMUM SPACING.
4. BOTH CORNER AND STRAIN POSTS SHALL HAVE STRAIN PANELS.
5. ALL POSTS SHALL BE CAPPED.
6. MEMBER SIZES SHALL BE THE FOLLOWING:

MEMBER	AISC SIZE	OUTSIDE DIA.
CORNER POST	2-1/2"	2.875"
LINE POST	1-1/2"	1.900"
STRAIN POST	1-1/2"	1.900"
BRACE	1-1/4"	1.666"
STRETCH BAR	3/16"x3/4" FLAT	3/16"x3/4" FLAT
GATE POST	3-1/2"	4.000"
TOP RAIL	1-1/4"	1.666"

7. CONSTRUCTION AND MATERIALS SHALL CONFORM TO SECT. 420 AND 772, RESPECTIVELY. SEE TABLE 772-1 FOR WEIGHTS OF MEMBERS.

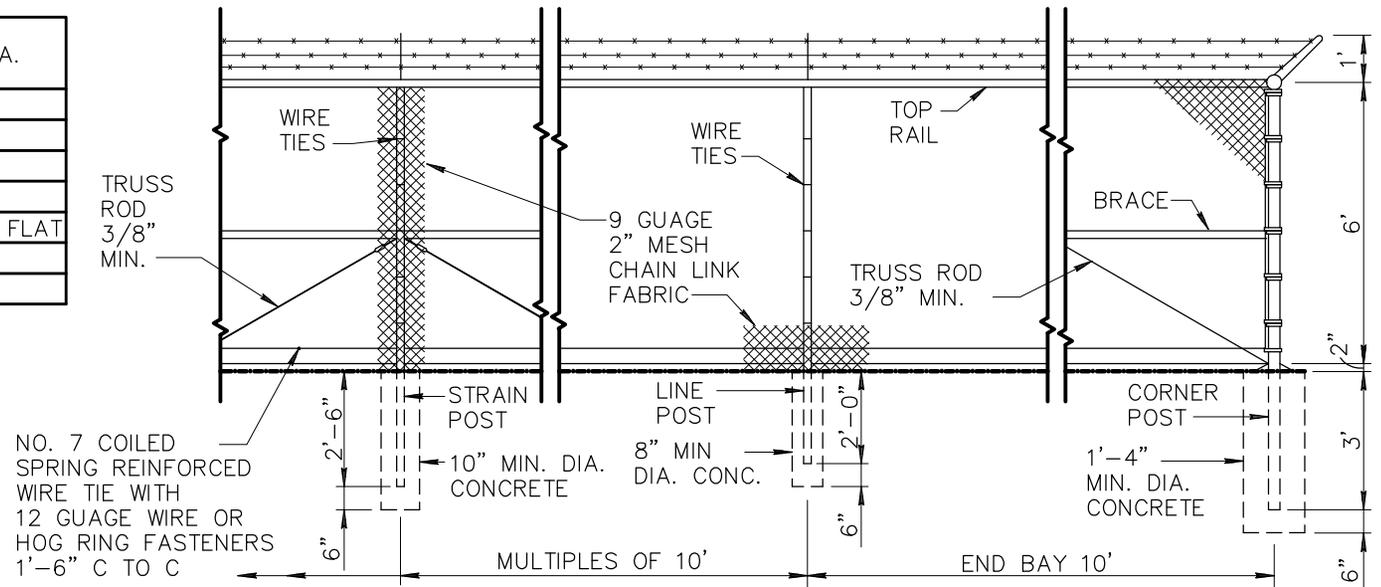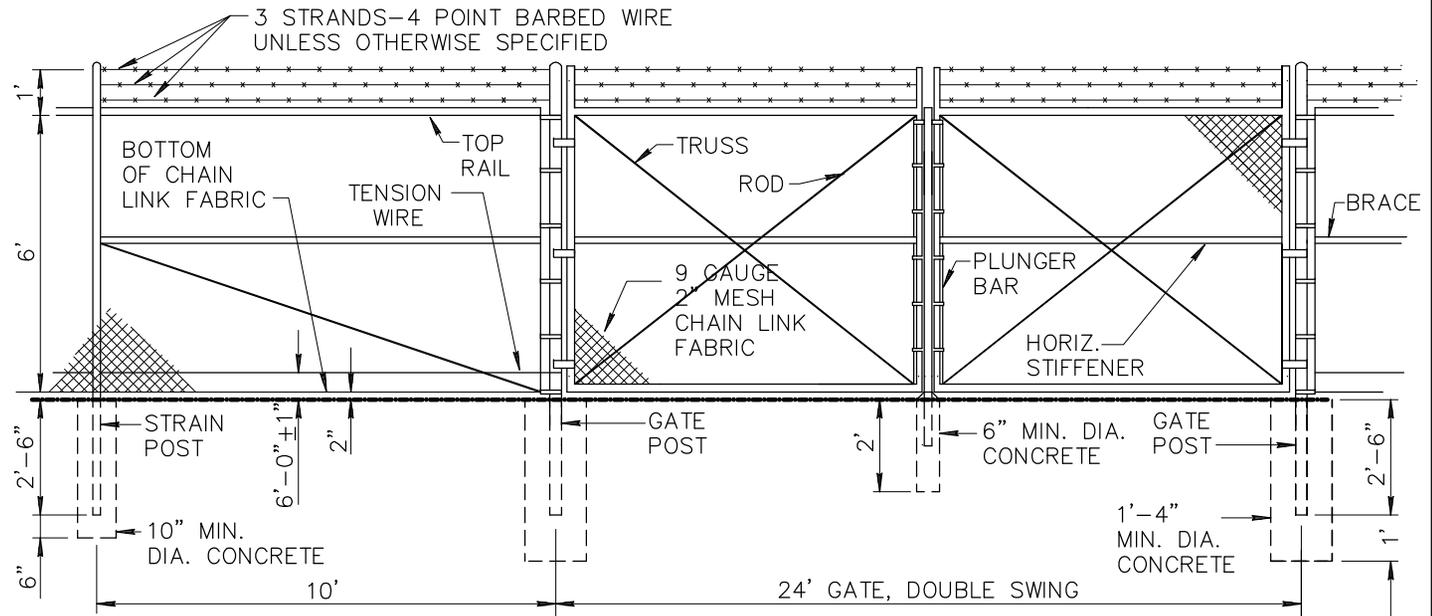

DETAIL NO.

160



STANDARD DETAIL
ENGLISH


6' CHAIN LINK
FENCE AND GATE

REVISED


01-01-2013

DETAIL NO.


160

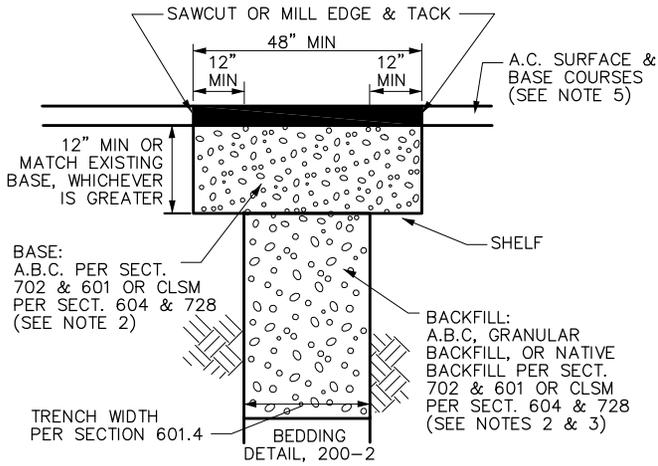


"T TOP" TRENCH REPAIR

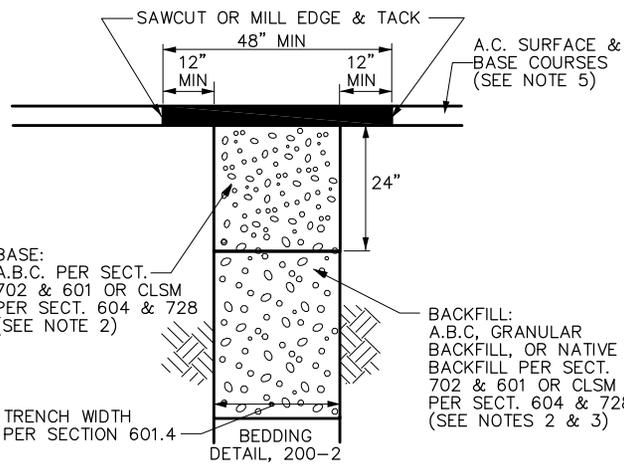

TYPE "A" TRENCH REPAIR

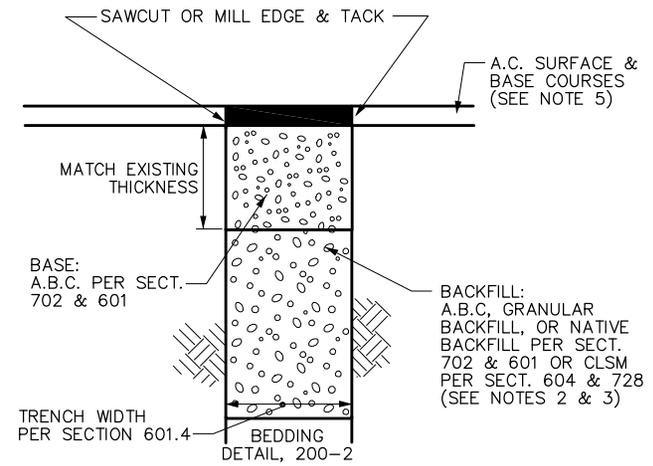


TYPE "B" TRENCH REPAIR

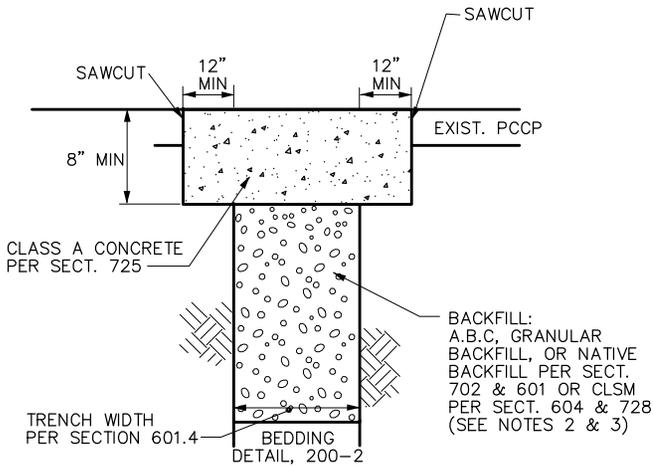

TYPE "C" TRENCH REPAIR

(TRENCH IN PORTLAND CEMENT CONCRETE PAVEMENT)


RESTORE SURFACE OUTSIDE OF TRENCH LINES DAMAGED DURING CONSTRUCTION WITH LIKE MATERIAL TO ORIGINAL CONDITION

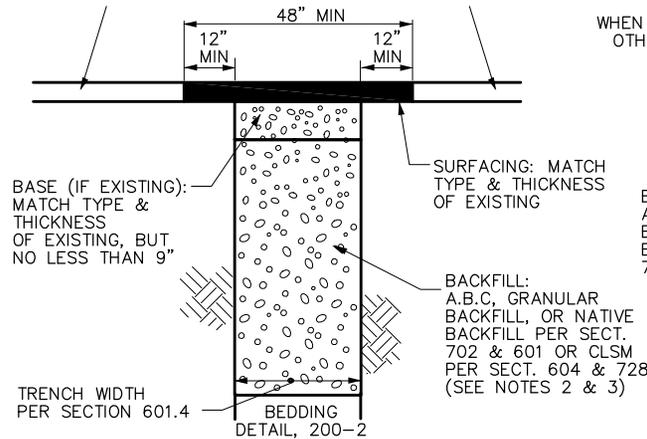

TYPE "D" TRENCH REPAIR

(TRENCH NOT UNDER CONCRETE OR ASPHALT PAVEMENT)

MATCH ADJACENT GROUND SURFACE WHEN FINAL STREET ELEVATION IS UNKNOWN. OTHERWISE, PLACE TO FINISHED SUBGRADE.

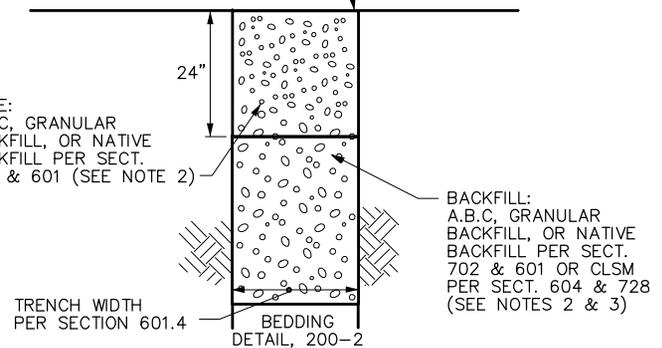

TYPE "E" TRENCH REPAIR

(TRENCH IN FUTURE ROADWAY PRISM OR ALLEY)

NOTES:

1. PAVEMENT MATCHING AND SURFACE REPLACEMENT SHALL BE IN ACCORDANCE WITH SECTION 336.
2. TYPE OF BACKFILL AND BASE (IF APPLICABLE) SHALL BE AS NOTED HEREIN UNLESS OTHERWISE SPECIFIED IN CONTRACT DOCUMENTS. IF NOT SPECIFIED, CLSM SHALL BE 1/2-SACK PER SECTIONS 604 AND 728.
3. TRENCHES LESS THAN 24" WIDE SHALL BE BACKFILLED FROM TOP OF BEDDING TO BOTTOM OF SURFACING MATERIALS WITH 1/2-SACK CLSM PER SECTIONS 604 AND 728.
4. BASE, BACKFILL, BEDDING AND FOUNDATION COMPACTION REQUIREMENTS SHALL BE IN ACCORDANCE WITH SECTION 601.
5. ASPHALT CONCRETE SURFACE AND BASE COURSES SHALL COMPLY WITH SECTION 336.2.4.1 UNLESS OTHERWISE SPECIFIED IN CONTRACT DOCUMENTS.
6. USE TYPE "A" FOR LONGITUDINAL TRENCH REPAIR AND USE "T-TOP" FOR TRANSVERSE TRENCH REPAIR (SEE DETAIL 200-2) UNLESS OTHERWISE SPECIFIED IN CONTRACT DOCUMENTS. TYPE "B" TRENCH REPAIR MAY BE USED FOR TRANSVERSE TRENCH REPAIR IF SPECIFIED BY THE AGENCY.
7. PROVIDE MINIMUM 12" WIDE SHELF AS SHOWN IN "T-TOP" TRENCH REPAIR AT ENDS OF TYPE "A" TRENCH REPAIR EXCEPT WHERE EDGE ABUTS EXISTING CONCRETE.
8. USE "T-TOP" PAVEMENT REPLACEMENT WHERE A TRENCH IS NOT PARALLEL TO A STREET OR GOES THROUGH AN INTERSECTION.
9. SEE DETAIL 200-2 FOR REMNANT PAVEMENT REMOVAL REQUIREMENTS.
10. EXPOSED COPPER OR POLYETHYLENE WATER PIPE UP TO 2" IN DIAMETER IN TRENCHES TO BE BACKFILLED WITH CLSM SHALL BE WRAPPED WITH MINIMUM 3/4" THICK PREFORMED PIPE-COVERING FOAM INSULATION BEFORE PLACING CLSM.

DETAIL NO.
200-1



STANDARD DETAIL
ENGLISH


**BACKFILL, PAVEMENT
AND SURFACE REPLACEMENT**

REVISED
01-01-2010

DETAIL NO.
200-1



LONGITUDINAL TRENCH

(TRENCH IN PAVEMENT PARALLEL TO TRAFFIC)

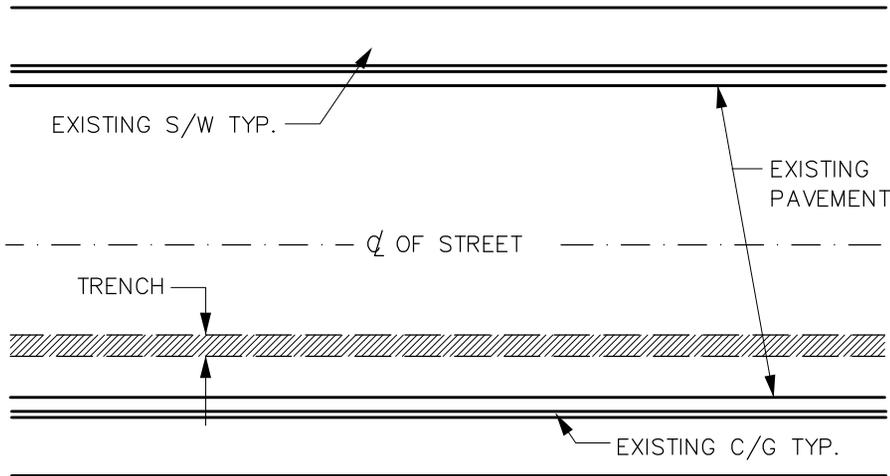


TRANSVERSE TRENCH

(TRENCH IN PAVEMENT NOT PARALLEL TO TRAFFIC)

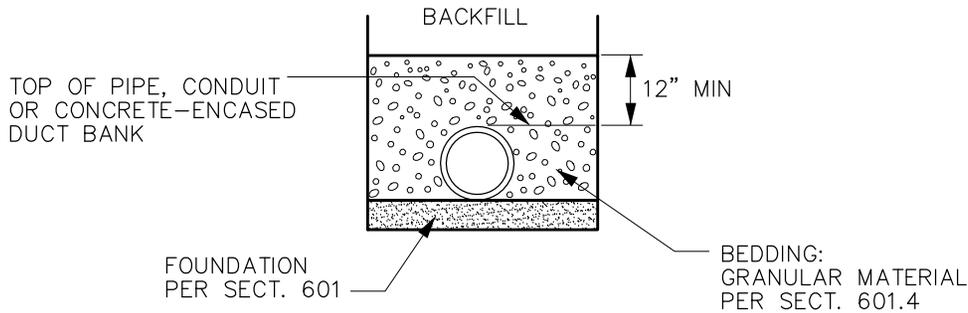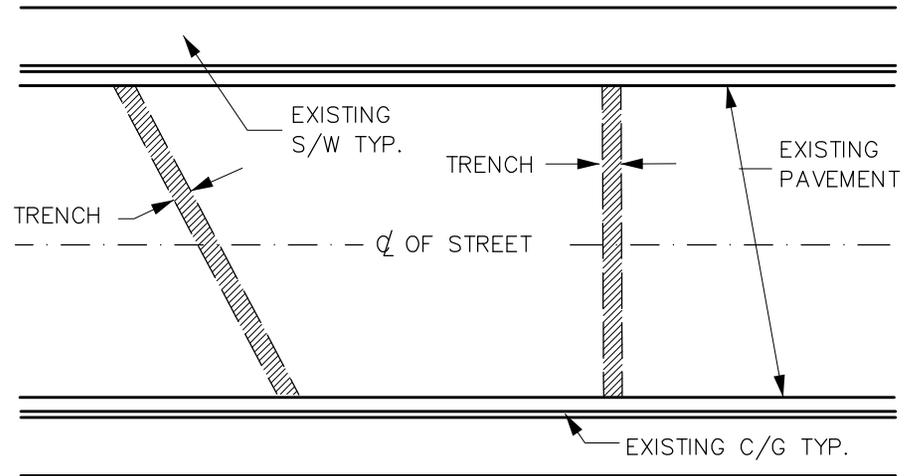




BEDDING DETAIL

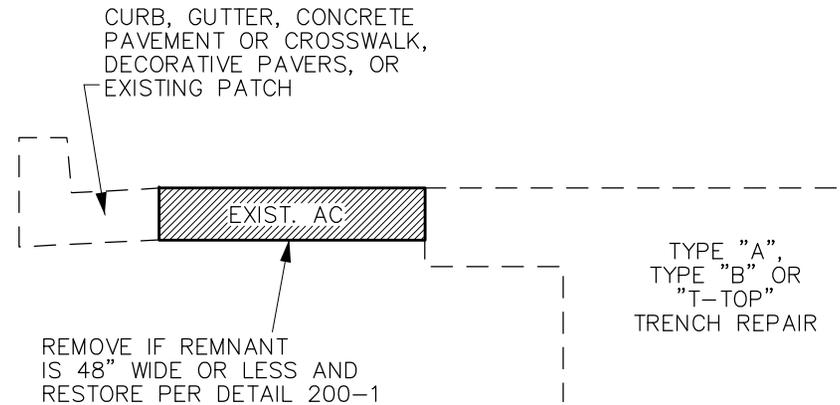

REMNANT PAVEMENT REMOVAL

NOTES:

1. SEE MAG DETAIL 200-1 FOR DETAILED TRENCH REPAIR REQUIREMENTS FOR TRENCH TYPES NOTED HEREIN.
2. SEE MAG DETAIL 211 FOR REQUIREMENTS REGARDING THE USE OF PLATING TRANSVERSE TRENCHES. USE OF STEEL PLATES SHALL NOT EXCEED 72 HOURS AFTER COMPLETION OF BACKFILL AND PRIOR TO FINAL PATCHING.

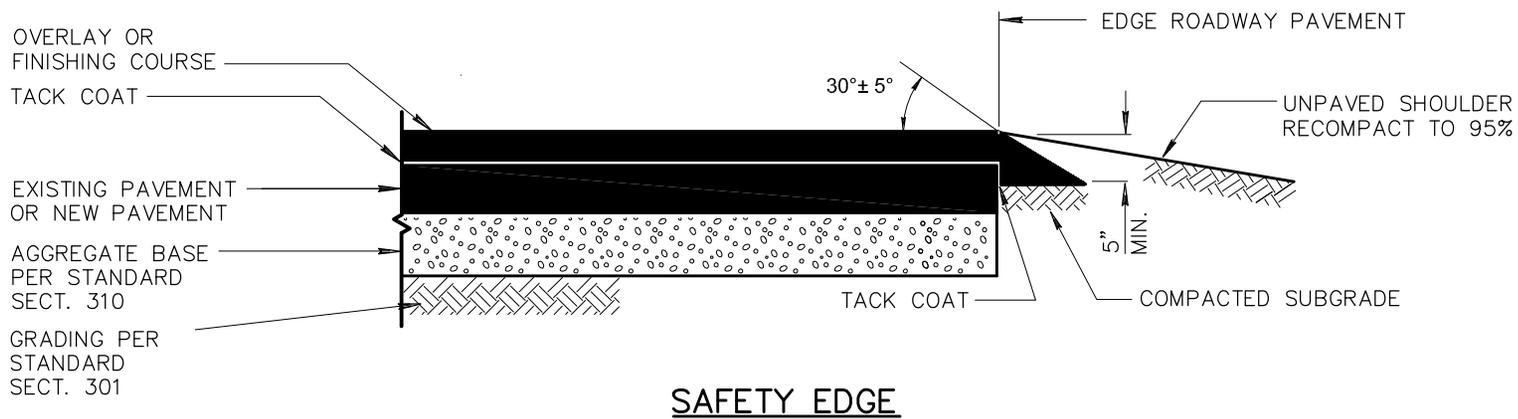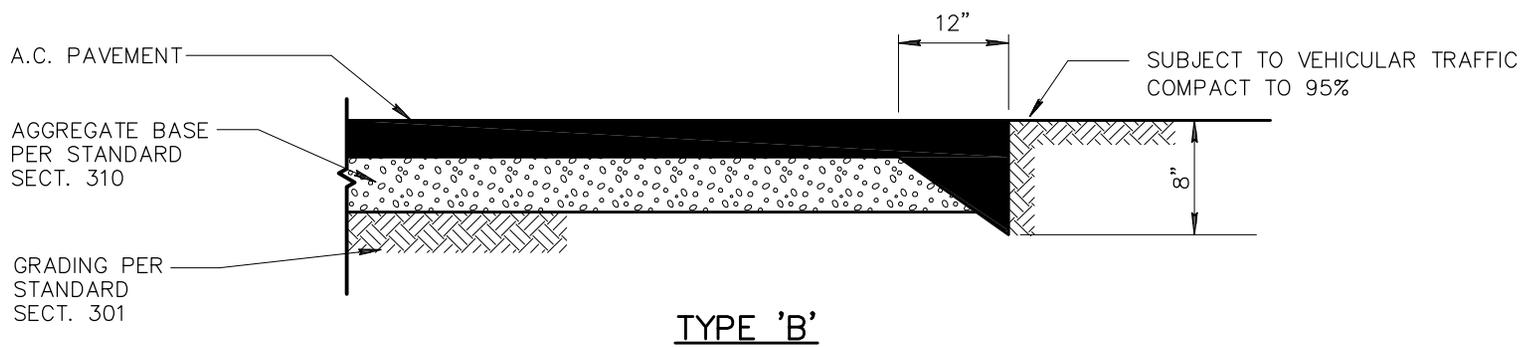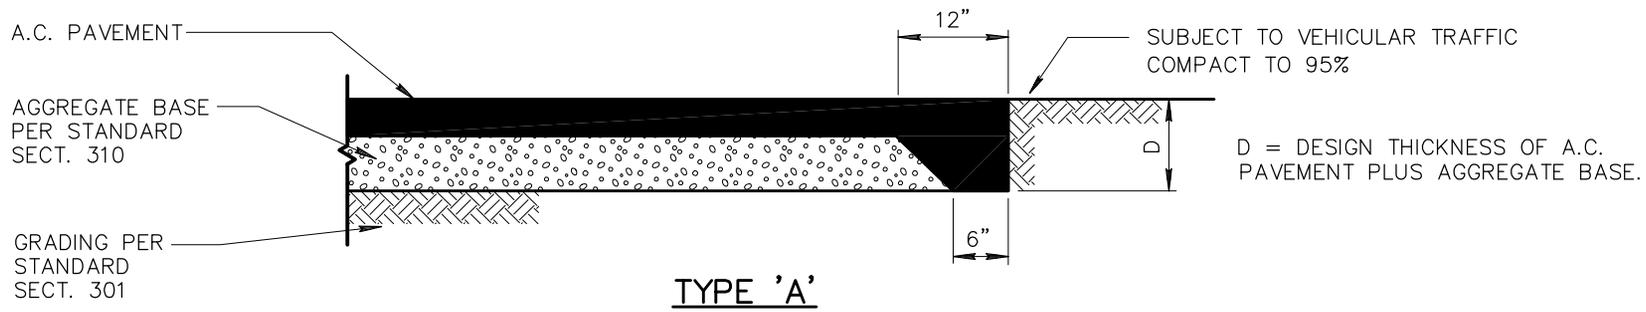

DETAIL NO.

201



STANDARD DETAIL
ENGLISH


ASPHALT PAVEMENT EDGE DETAILS

DATE


01-01-2014

DETAIL NO.


201

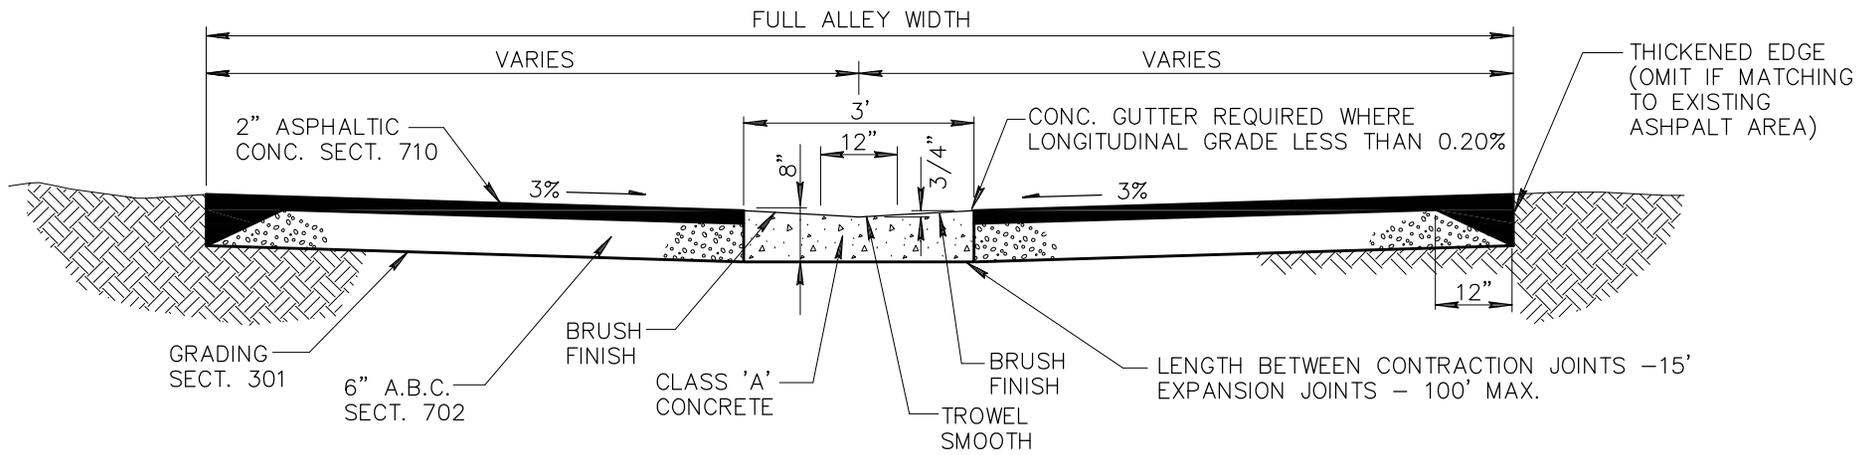

PAVED ALLEY DETAIL

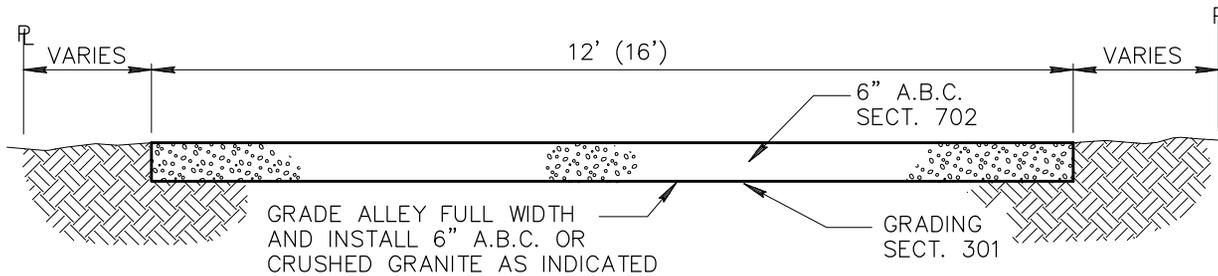



UNPAVED ALLEY DETAIL

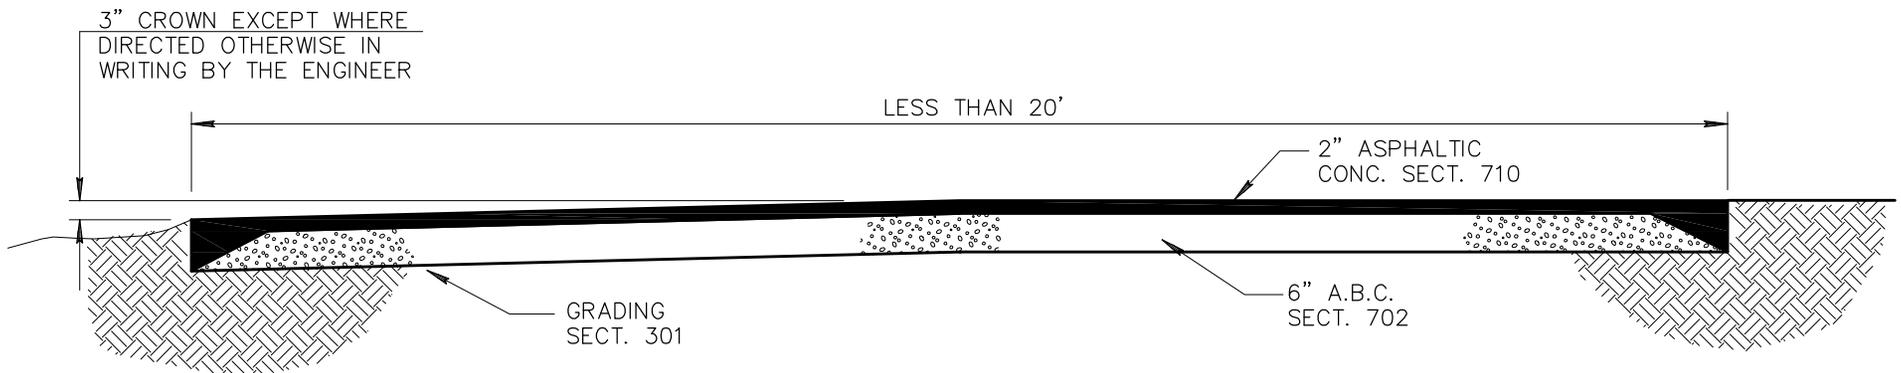


RESIDENTIAL ALLEY DETAIL

NOTES:


1. ANGLE EQUALS 45° UNLESS SPECIFIED ON PLAN.
2. DIMENSION 'B' EQUALS 'A' + 2'
3. (———>) INDICATES DIRECTION OF FLOW.
4. PAINT STEEL ACCORDING TO SECTION 790. PAINT NUMBER 1-A OR 1-B.
5. R EQUALS 1" UNLESS OTHERWISE DIRECTED.
6. H EQUALS CURB FACE HEIGHT.
7. FOR ROLL CURB AND GUTTER, USE 2' TRANSITIONS TO VERTICAL CURB.
8. CONCRETE SHALL BE CLASS B PER SECT. 725 AND INSTALLED PER SECT. 505.

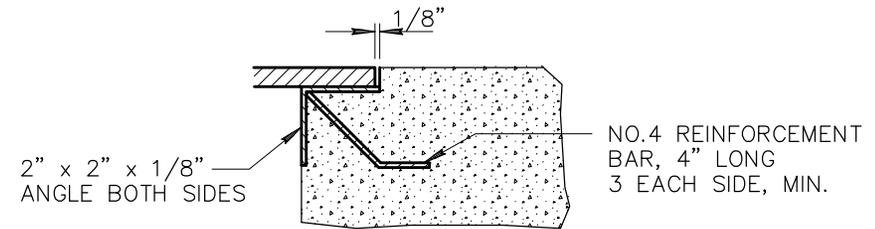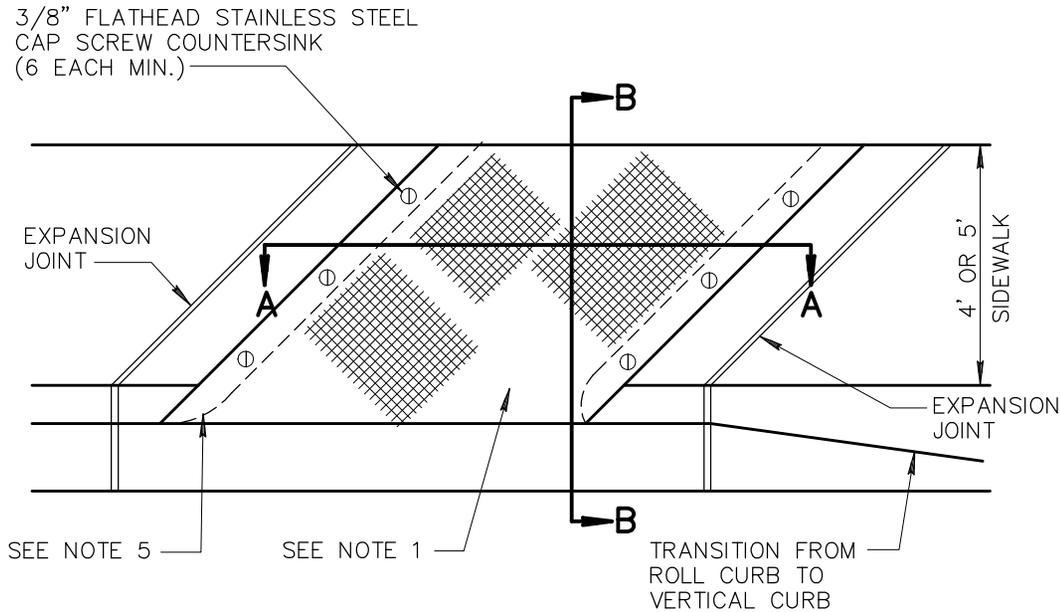

DETAIL C

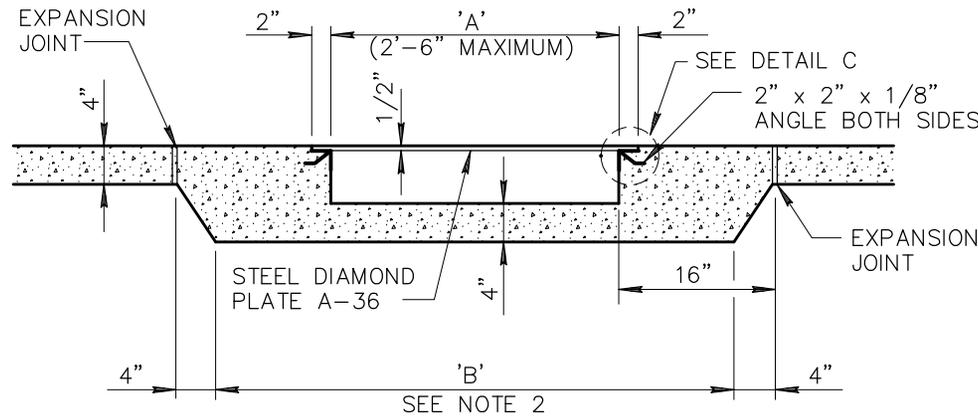

SECTION 'A-A'

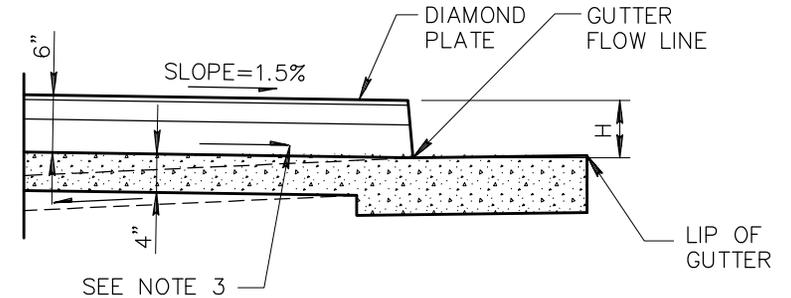

SECTION 'B-B'

DETAIL NO.

203



STANDARD DETAIL
ENGLISH


SCUPPERS

REVISED


01-01-1998

DETAIL NO.


203

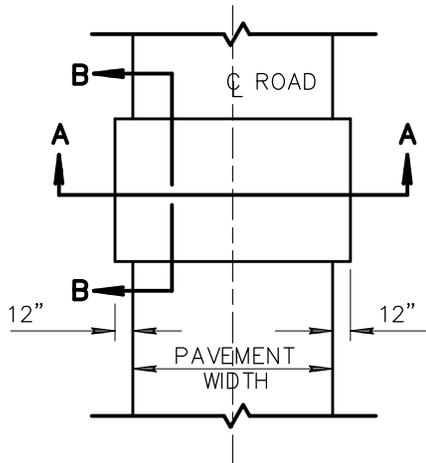


PLAN OF CONCRETE EQUIPMENT CROSSING

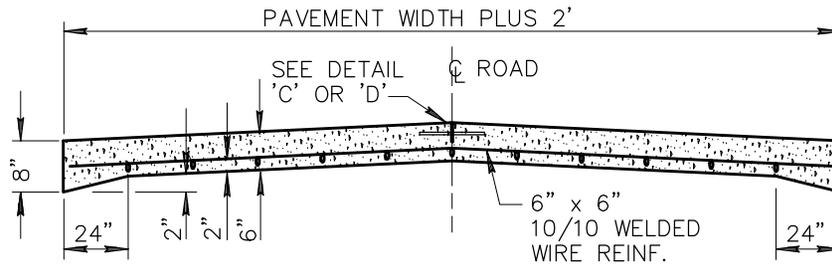


SECTION A-A

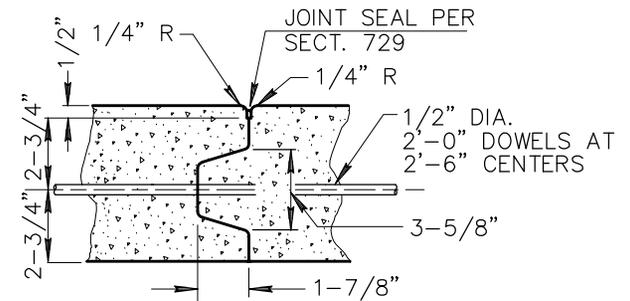

LONGITUDINAL JOINT DETAIL 'C'

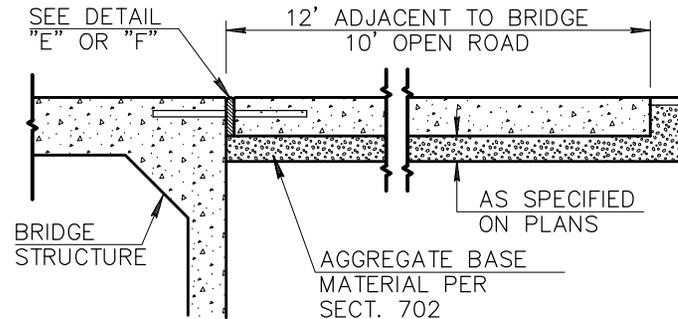


SECTION B-B

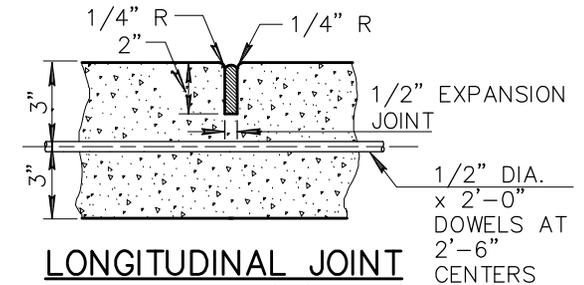


LONGITUDINAL JOINT DETAIL 'D'

NOTES:


1. WHEN EQUIPMENT CROSSING LIES ADJACENT TO BRIDGE OR BOX CULVERT, CONSTRUCT THE EQUIPMENT CROSSING TO WIDTH OF BRIDGE ROADWAY.
2. ALL DOWELS IN CENTER JOINTS SHALL BE DEFORMED BARS AND SHALL HAVE UNBROKEN BOND. THEY SHALL BE HELD SECURELY IN PLACE, PARALLEL TO THE SUBGRADE AND PERPENDICULAR TO THE CENTER LINE OF THE ROAD.
3. THE EDGING TOOL USED FOR ALL LONGITUDINAL JOINTS SHALL BE SO CONSTRUCTED AS TO PROVIDE A SMOOTH TROWELED SURFACE 3" WIDE ON EACH SIDE OF THE JOINT.
4. IF APPROVED BY THE ENGINEER, OTHER DEFORMATIONS MAY BE USED IN LONGITUDINAL JOINT - DETAIL 'C'.
5. DETAIL 'C' TO BE USED ONLY WHEN FULL WIDTH CAN NOT BE POURED IN ONE POUR. USE DETAIL 'D' IF FULL WIDTH IS POURED IN ONE POUR.

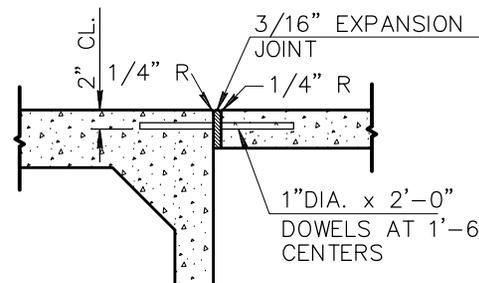

JOINT AT NEW BRIDGE DETAIL 'F'

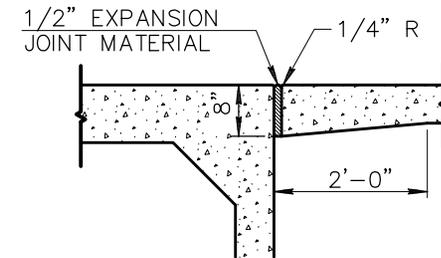


JOINT AT EXISTING BRIDGE DETAIL 'E'

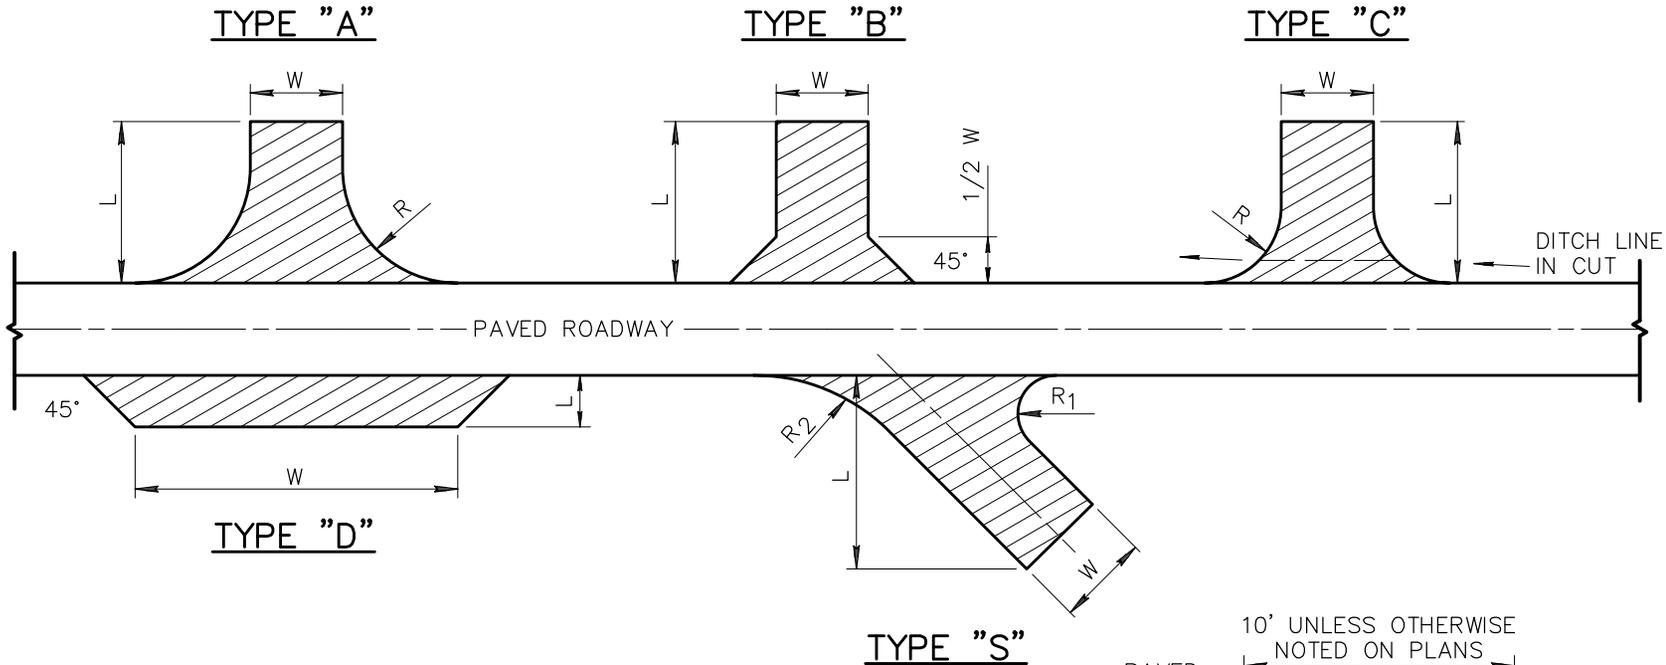


NOTES:

1. W - INDICATES WIDTH OF PAVED SURFACE OF TURNOUT.
L - INDICATES LENGTH OF PAVED SURFACE OF TURNOUT.
R - RADIUS.
2. SIZE AND TYPE OF TURNOUT SHALL BE NOTED ON PLANS AS FOLLOWS:
90° - NO RADIUS: WxL-SURFACE-TYPE; (12' x 30'-A.C.-TYPE "B" TURNOUT),
90° - WITH A RADIUS: WxLxR-SURFACE-TYPE; (12' x 20' x 15'-A.C.-TYPE "C"
TURNOUT). OTHER THAN 90° WITH 2 RADII-TYPE "S": WxLxR₁ xR₂-SURFACE-TYPE;
(12' x 20' x 15'-A.C.-TYPE "S" TURNOUT).
OR IT MAY BE NOTED ON PLANS IN CONVENTIONAL TERMS.
3. TURNOUTS TO BE STRAIGHT TYPE UNLESS OTHERWISE NOTED ON PLANS.
4. A.C. AND BASE MATERIAL THICKNESS FOR TURNOUTS SHALL BE THE SAME AS SHOWN ON THE ROADWAY SECTION, UNLESS OTHERWISE NOTED.
5. ANY EXCAVATION OR EMBANKMENT FOR TURNOUTS IS INCLUDED IN THE ROADWAY QUANTITIES.
6. TURNOUTS ARE TO BE PLACED WHERE SHOWN ON PLANS, OR AS DIRECTED BY THE ENGINEER.

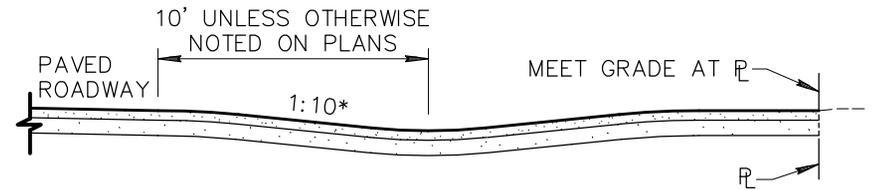

TYPICAL VALLEY GUTTER TURNOUT

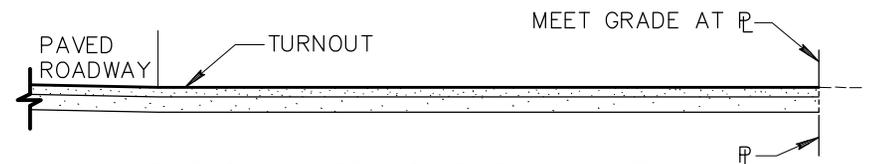

TYPICAL STRAIGHT TURNOUT

* UNLESS OTHERWISE NOTED ON PLANS

DETAIL NO.

205



STANDARD DETAIL
ENGLISH


PAVED TURNOUTS

REVISED


01-01-2006

DETAIL NO.


205

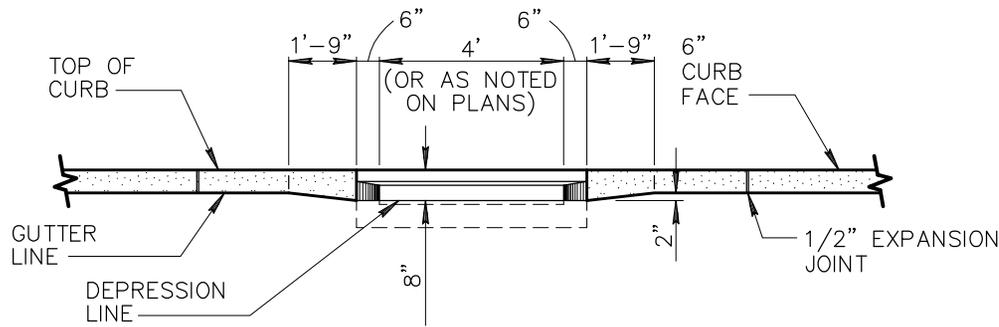


SECTION A-A

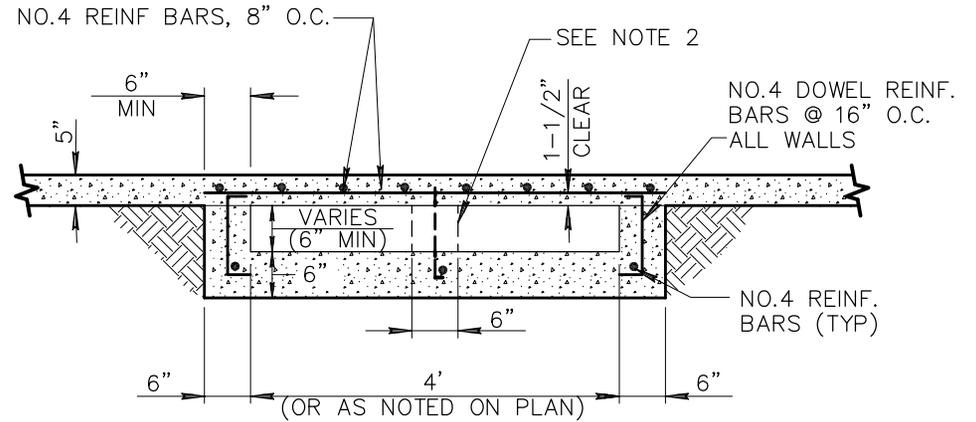

SECTION B-B

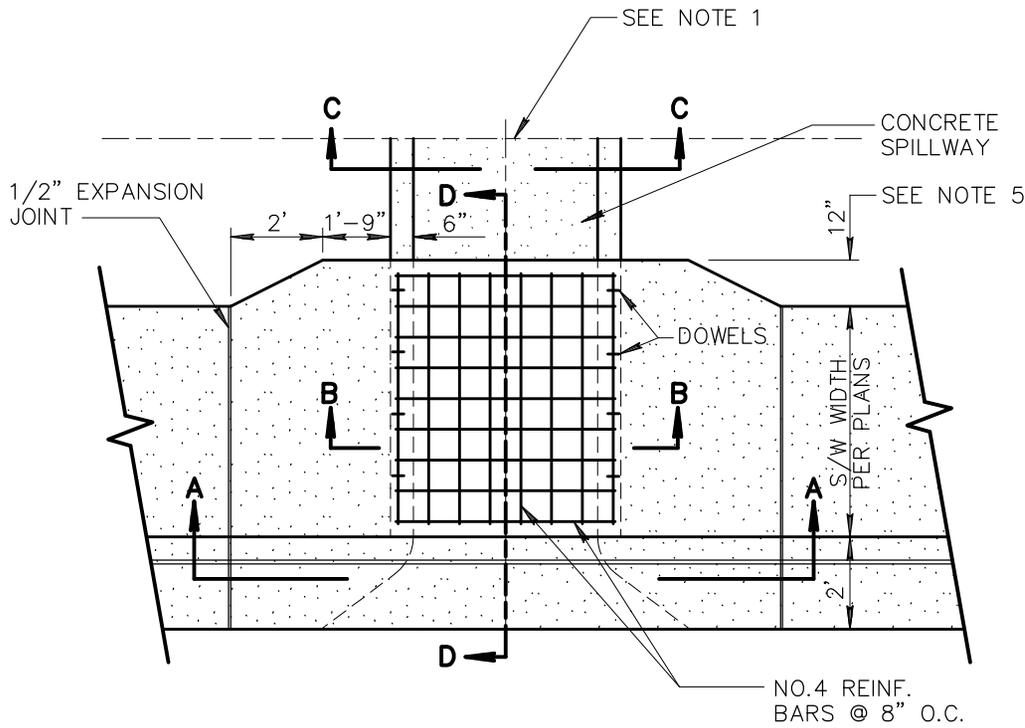


SCUPPER PLAN VIEW

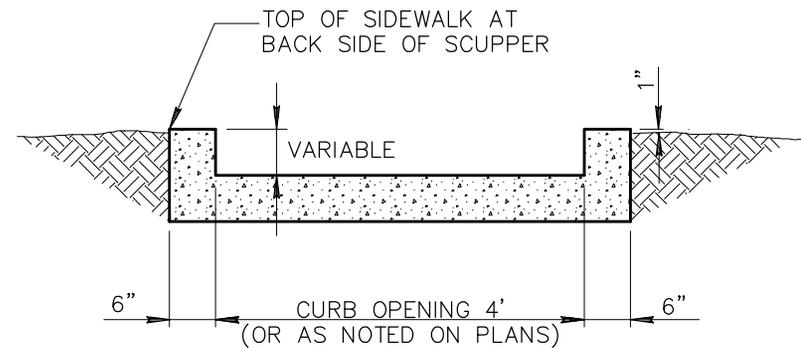

SECTION C-C SPILLWAY

NOTES:

1. TRANSITION TO SPILLWAY/CHANNEL AS PER APPROVED PLANS.
2. A CENTER WALL SHALL BE INSTALLED IN SCUPPERS WIDER THAN 4' OR IF MORE THAN 1 SCUPPER IS BUILT IN SERIES.
3. EXPANSION JOINT FILLER SHALL BE 1/2" BITUMINOUS TYPE PREFORMED EXPANSION JOINT FILLER, ASTM D-1751.
4. CONCRETE FOR THE SCUPPER SHALL BE CLASS 'A', PER SECTION 725. CONCRETE FOR THE SPILLWAY SHALL BE CLASS 'A' OR CLASS 'B'.
5. 12" OFFSET DISTANCE SHALL BE INCREASED TO 2'-6" FOR DESIGNATED BICYCLE PATHS.

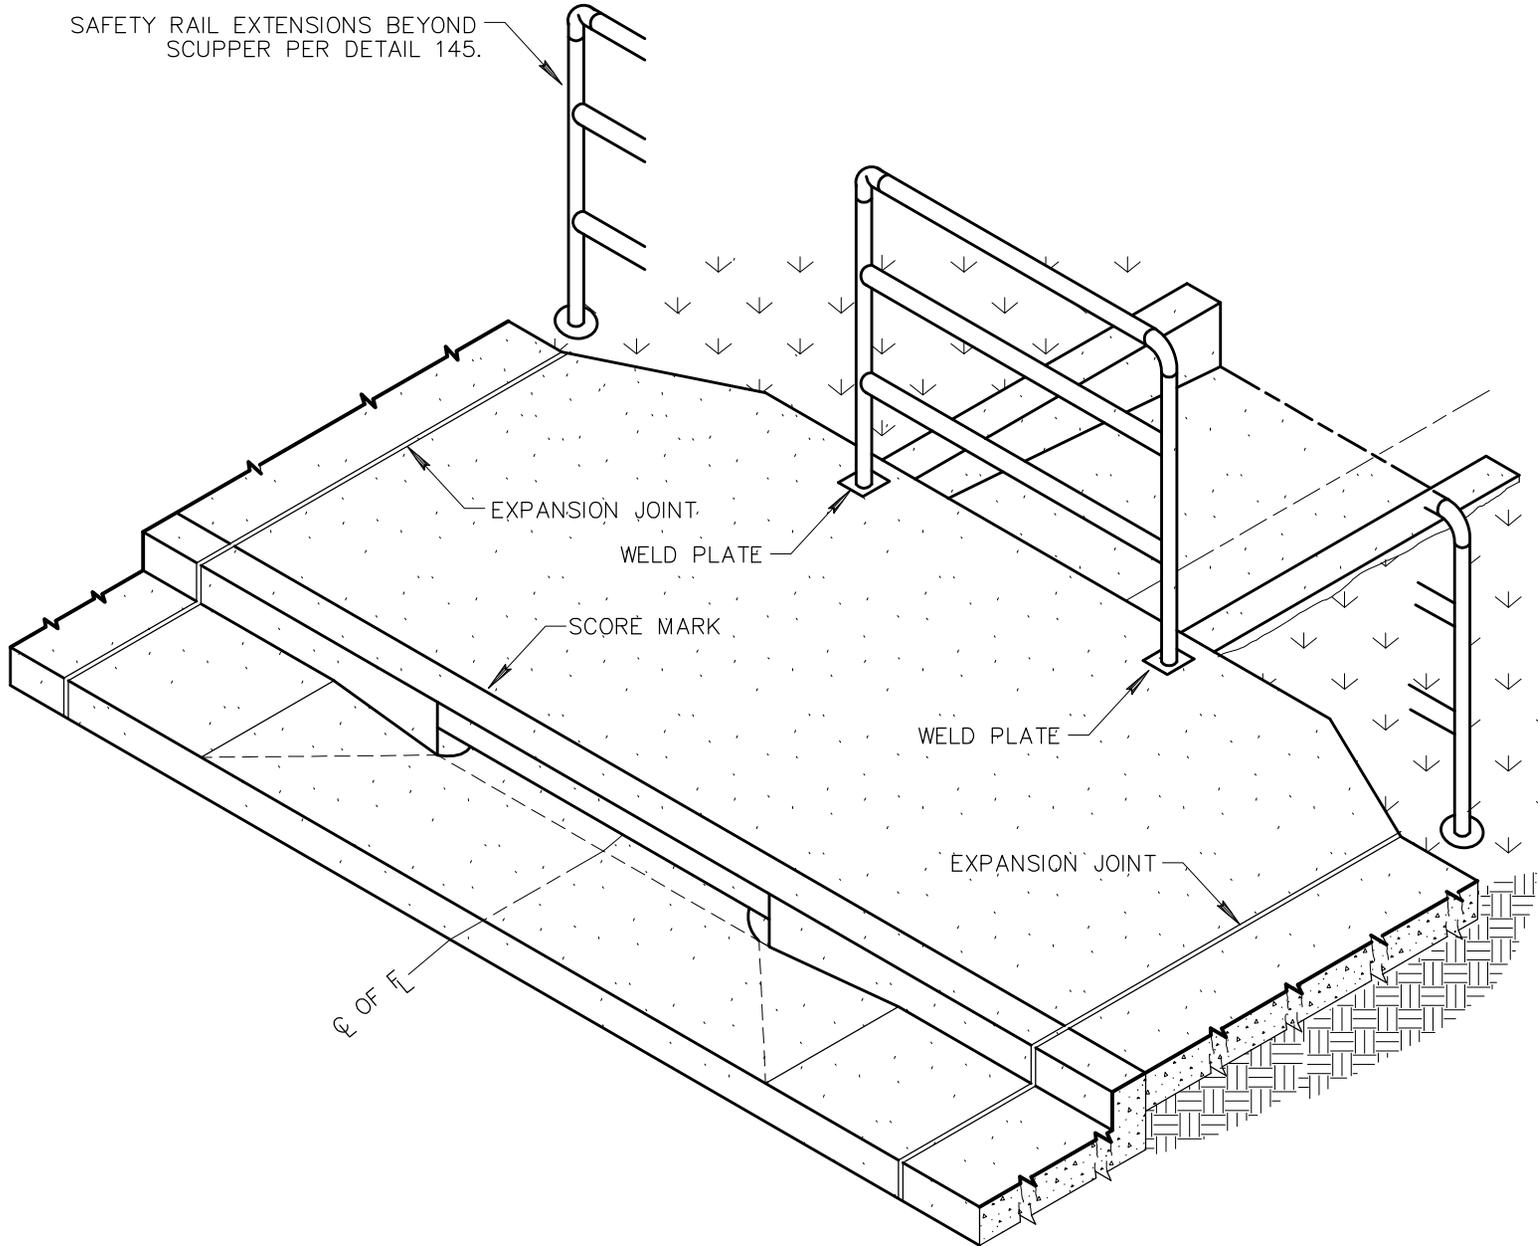

DETAIL NO.
206-3




STANDARD DETAIL
ENGLISH


CONCRETE SCUPPER

REVISED
01-01-2007


DETAIL NO.
206-3

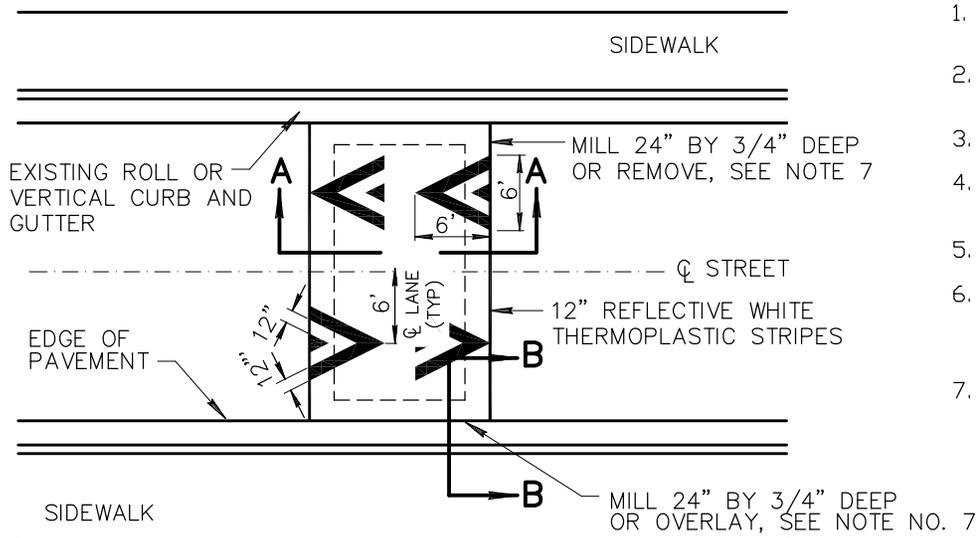

PLAN VIEW

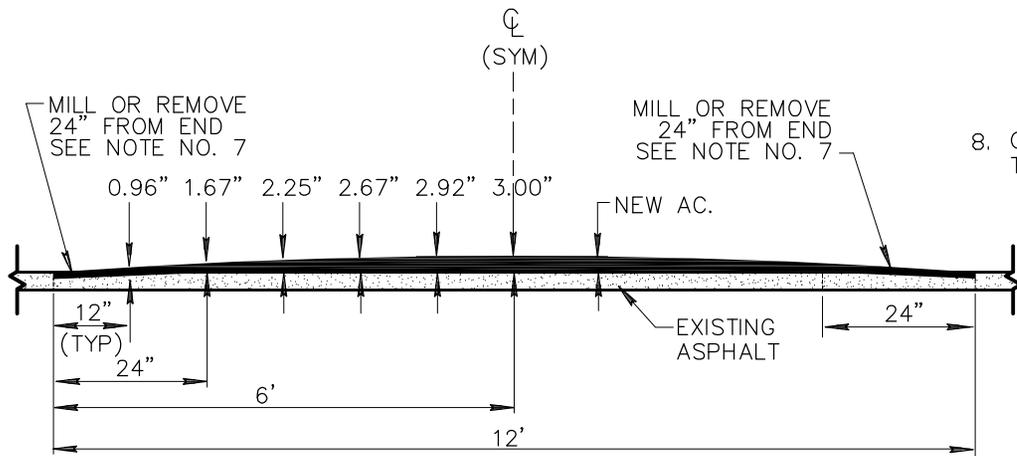

SECTION A-A

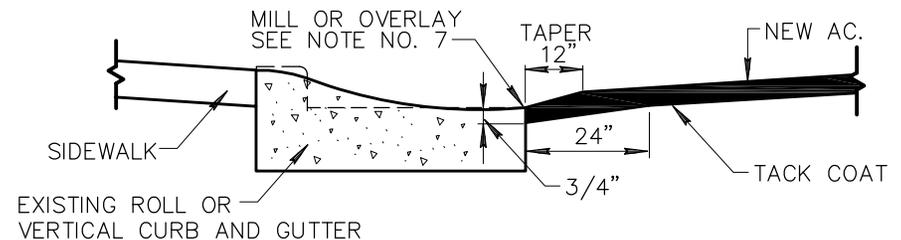

SECTION B-B

NOTES:

1. HUMPS MUST BE THE FULL 3" FOR MAXIMUM EFFECT BUT SHALL NOT EXCEED 3.25".
2. HUMPS CONSTRUCTED OVER 3.25" OR LESS THAN 3.00" SHALL BE REMOVED AND REPLACED AT THE CONTRACTOR'S EXPENSE.
3. CROSS-SECTION ELEVATIONS SHALL HAVE A MAXIMUM TOLERANCE OF +0.25".
4. SPEED HUMPS SHALL NOT BE PLACED OVER MANHOLES, WATER VALVES, SURVEY MONUMENTS, JUNCTION CHAMBERS, ETC. OR IN CONFLICT WITH DRIVEWAYS.
5. SPEED HUMPS MUST BE PLACED AT LOCATIONS APPROVED BY THE AGENCY.
6. HUMP TO BE CONSTRUCTED WITH ASPHALT MIX APPROVED BY THE AGENCY. ASPHALT COMPACTION SHALL BE PER SECTION 321. A TACK COAT PER SECTION 713 SHALL BE APPLIED PRIOR TO APPLICATION OF PAVEMENT.
7. INSTALLATION JOINTS:
 - A. STANDARD INSTALLATION:
THE EXISTING ROADWAY SHALL BE MILLED TO A MINIMUM DEPTH OF 3/4" AROUND THE PERIMETER. CROSS SECTION DIMENSIONS DO NOT INCLUDE THE 3/4" MILLING. CONTRACTOR MUST PROVIDE VERIFICATION OF CROSS-SECTION DIMENSIONS.
 - B. ALTERNATIVE INSTALLATION:
FOR TRANSVERSE JOINTS (CROSS ROADWAY), THE EXISTING ASPHALT SHALL BE SAW CUT AND REMOVED FOR A WIDTH OF 24". THE ASPHALT SHALL BE REPLACED WITH THE SAME ASPHALT AND AT THE SAME TIME AS THE HUMP ASPHALT. FOR LONGITUDINAL JOINTS, THE EXISTING ASPHALT SHALL BE OVERLAID AND TAPERED IN 12". CROSS-SECTION DIMENSIONS REFLECT DISTANCES FROM THE SURFACE OF EXISTING ASPHALT.
8. CONTACT THE AGENCY (OR INSPECTOR) ONE WEEK PRIOR TO INSTALLATION TO COORDINATE PAVEMENT MARKINGS AND SIGNING.

DETAIL NO.

210



STANDARD DETAIL
ENGLISH


RESIDENTIAL SPEED HUMP

REVISED

01-01-2012

DETAIL NO.

210

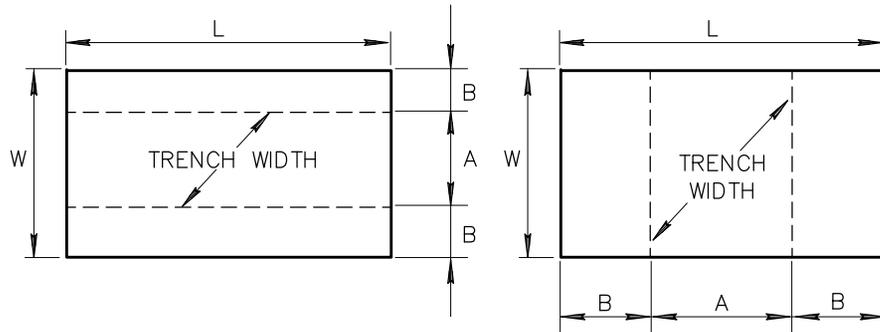


LONGITUDINAL
STEEL PLATE


TRANSVERSE
STEEL PLATE

PLATE SIZE						
LONGITUDINAL					TRANSVERSE	
(A)	(B)	THICKNESS	(W)	(L)	(A)	(B)
12"	18"	1"	4'	8'	58"	19"
12"	18"	1"	4'	10'	58"	31"
24"	18"	1"	5'	10'	70"	25"
36"	18"	1"	6'	10'	44"	38"
48"	18"	1"	7'	10'	52"	34"
60"	18"	1"	8'	10'	58"	31"
12"	18"	1-1/4"	4'	15'	88"	47"
24"	18"	1-1/4"	5'	12'	104"	20"
36"	18"	1-1/4"	6'	12'	66"	39"
36"	18"	1-1/4"	6'	16'	66"	63"
48"	18"	1-1/4"	7'	12'	76"	33"
48"	18"	1-1/4"	7'	16'	76"	58"
60"	18"	1-1/4"	8'	12'	86"	29"
60"	18"	1-1/4"	8'	15'	86"	47"
60"	18"	1-1/4"	8'	16'	86"	63"
60"	18"	1-1/4"	8'	20'	86"	77"
60"	18"	1-3/8"	8'	20'	102"	69"


NOTES:

1. USE TYPE 1 PLATE INSTALLATION WHERE POSTED SPEED LIMIT IS LESS THAN 30 MPH. USE TYPE 2 PLATE INSTALLATION WHERE POSTED SPEED LIMIT IS 30 MPH OR GREATER.
2. FOR TYPE 2 PLATE INSTALLATION, THE STEEL PLATE SHALL BE RECESSED BY MILLING INTO THE EXISTING ASPHALT TO SET FLUSH WITH THE SURFACE OF THE EXISTING ASPHALT. FULL DEPTH CUTTING OF PAVEMENT SECTION OUTSIDE OF TRENCH IS NOT PERMITTED. MILLING DEPTH SHALL MATCH THICKNESS OF PLATE. THE GAP BETWEEN THE EDGE OF THE PLATE AND THE ADJACENT EXISTING ASPHALT PAVEMENT MUST BE FILLED WITH TEMPORARY ASPHALT.
3. TRENCH WIDTHS ARE BASED ON AN ANALYSIS PER THE 14TH EDITION OF STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES BY AASHTO. AN ASSUMED AXLE LOADING OF 12 TONS WITH A 30% IMPACT FACTOR WAS USED. THE AXLE LENGTH IS 6 FEET; THEREFORE THE NUMBER OF WHEELS CARRIED BY A PLATE DEPENDS ON THE ROADWAY WIDTH.
4. STEEL PLATE MUST BE ABLE TO WITHSTAND H-20 TRAFFIC LOADINGS WITHOUT ANY MOVEMENT.
5. PLATES SHALL BE FABRICATED FROM ASTM A36 STEEL (MIN).
6. PLATES SHALL BE SECURED FROM LATERAL MOVEMENT AND VERTICAL VIBRATION (ASSOCIATED NOISE) WHILE IN USE BY TEMPORARY ASPHALT (COLD MIX.)

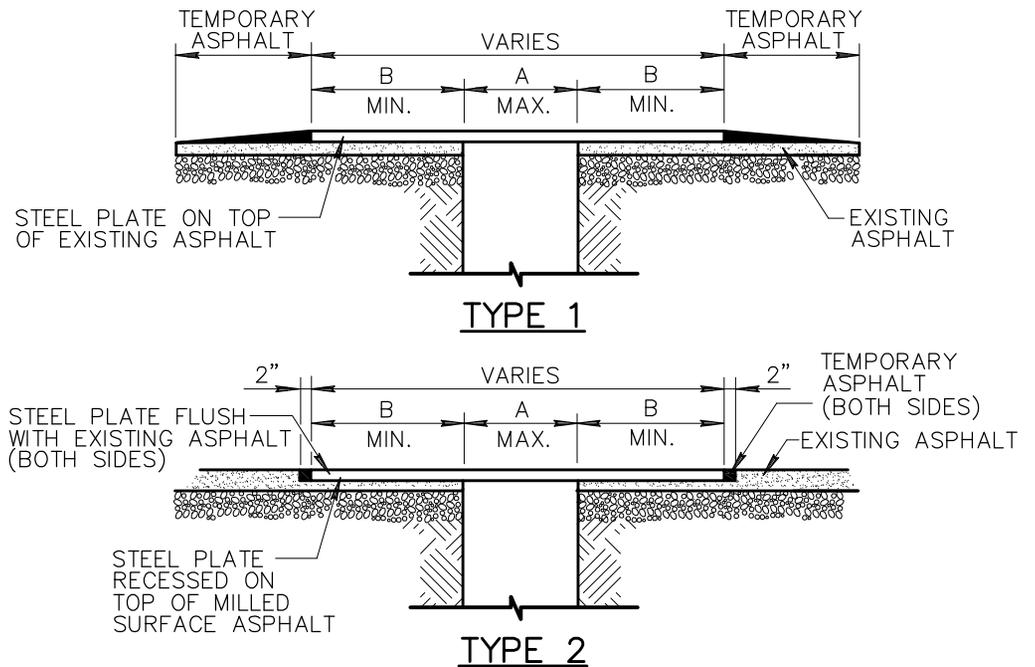

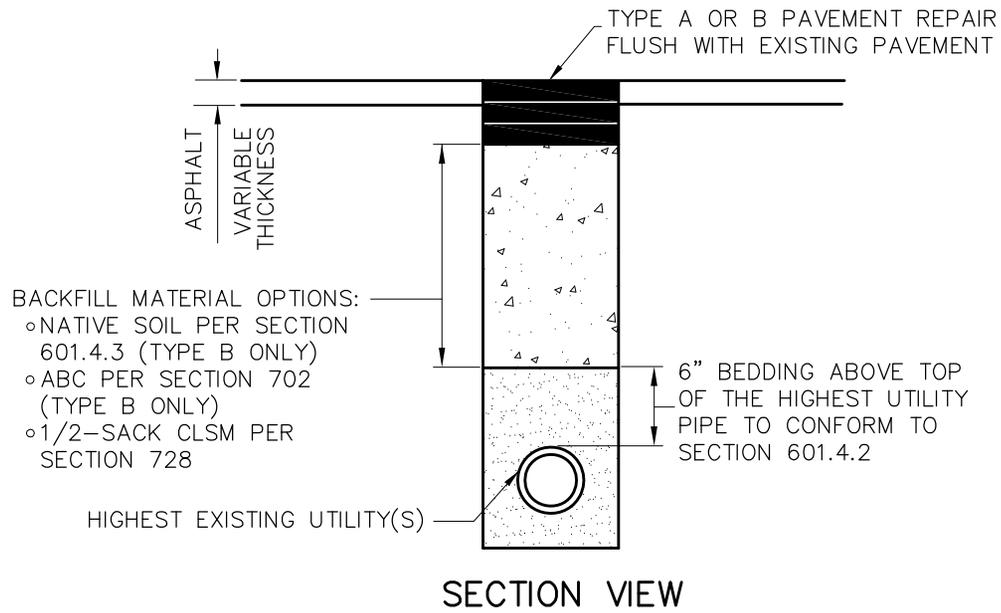

TYPE A PAVEMENT REPAIR




PLAN VIEW

NOTES:

1. DIMENSIONS ARE NOMINAL.
2. EDGES SHALL BE CUT TO A NEAT VERTICAL FACE.
3. PLACE CLSM BACKFILL IN ACCORDANCE WITH SECTION 604.
4. PLACE AGENCY-APPROVED ASPHALT CONCRETE IN MAXIMUM 2" LIFTS.


TYPE B PAVEMENT REPAIR

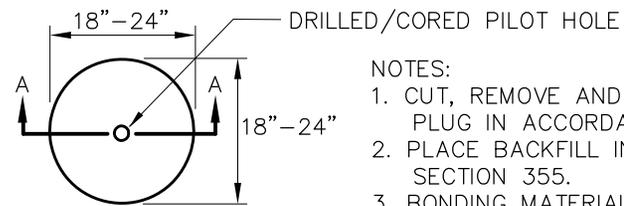


PLAN VIEW

NOTES:


1. CUT, REMOVE AND REPLACE PAVEMENT. PLUG IN ACCORDANCE WITH SECTION 355.
2. PLACE BACKFILL IN ACCORDANCE WITH SECTION 355.
3. BONDING MATERIAL SHALL BE AS SPECIFIED IN SECTION 708.

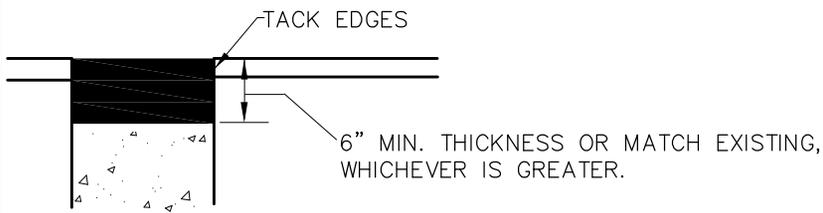


SECTION A-A

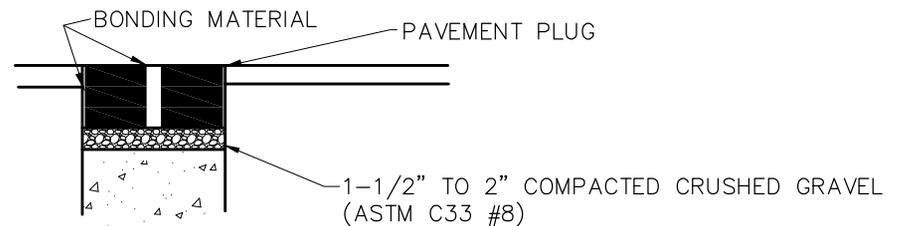

SECTION A-A

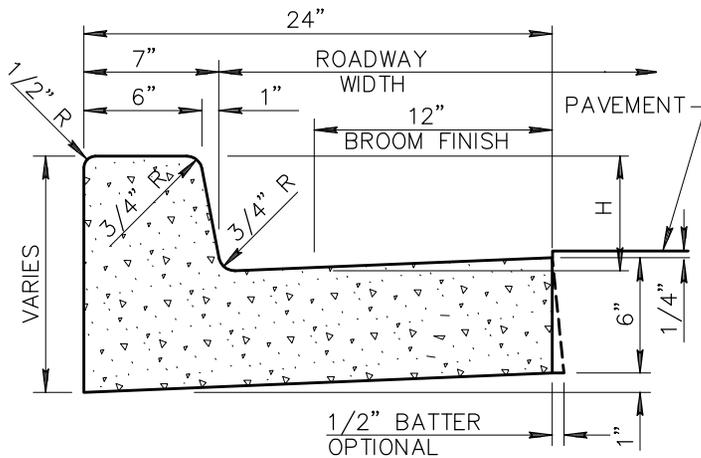

**VERTICAL CURB AND GUTTER
(TYPE A)**

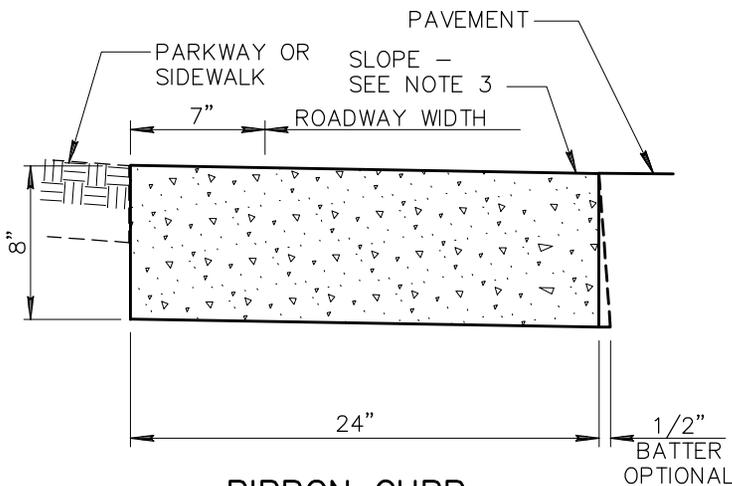


**RIBBON CURB
(TYPE B)**

NOTES: (TYPE A)

1. ALL EXPOSED SURFACES TO BE TROWEL FINISHED EXCEPT AS SHOWN. SEE SECT. 340.
2. H=6" OR AS SPECIFIED ON PLANS.
3. CONTRACTION JOINT SPACING 10' MAXIMUM.
4. EXPANSION JOINTS AS PER SECT. 340.
5. CLASS 'B' CONCRETE PER 725.
6. WHEN THE ADJACENT PAVEMENT SECTION SLOPES AWAY FROM THE GUTTER, THE SLOPE OF THE GUTTER PAN SHALL MATCH PAVEMENT CROSS SLOPE.


NOTES: (TYPE B)

1. CONSTRUCT CURB AND INSTALL 1/2" MASTIC EXPANSION JOINTS, A.S.T.M. D-1751. SECT. 340.
2. BROOM FINISH ALL SURFACES.
3. RIBBON CURB MAY SLOPE TOWARDS PAVEMENT OR PARKWAY AS INDICATED ON PLANS.
4. CONTRACTION JOINT SPACING 10' MAXIMUM.
5. CONCRETE SHALL BE CLASS 'B' PER SECT. 725 AND INSTALLED PER SECT. 505.

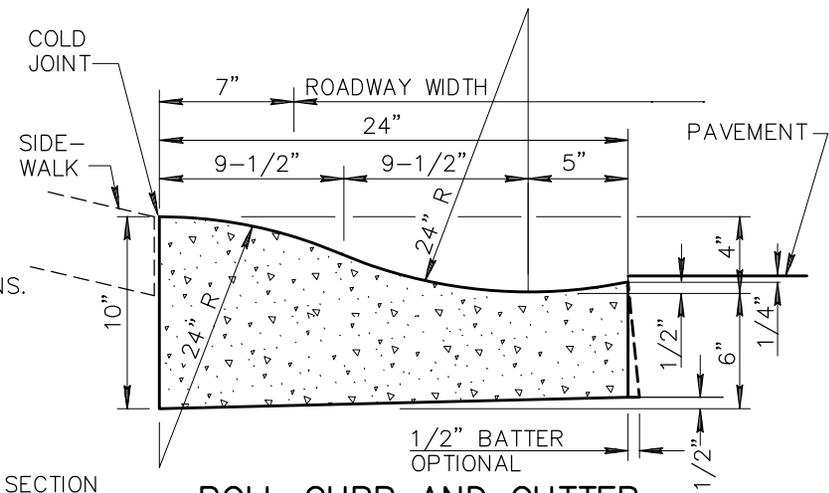

**ROLL CURB AND GUTTER
(TYPE C)**


SPECIAL SECT. USE FOR HIGH SIDE CURB WITH SHEET DRAINAGE ACROSS STREET

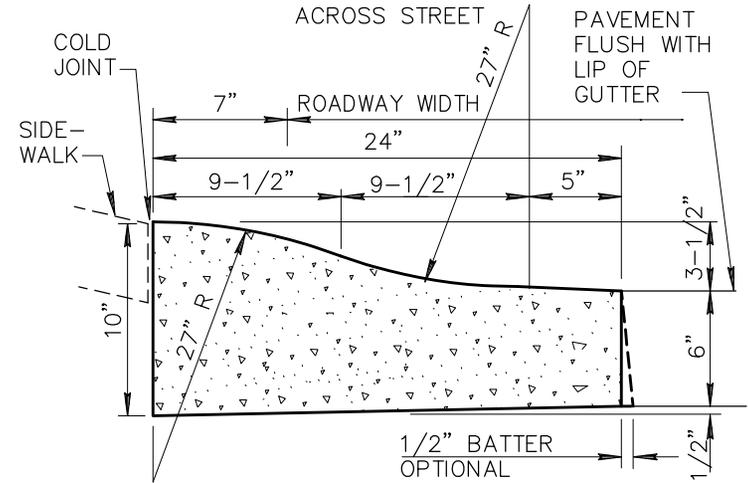


(TYPE D)

NOTES: (C & D)


1. ALL WORK AND MATERIALS SHALL CONFORM TO SECT. 304, 505 AND 725. BROOM FINISH TO EXPOSED SURFACE.
2. CONTRACTION JOINT SPACING 10' MAXIMUM.
3. EXPANSION JOINTS AS PER SECT. 340.
4. CLASS 'B' CONCRETE PER 725.

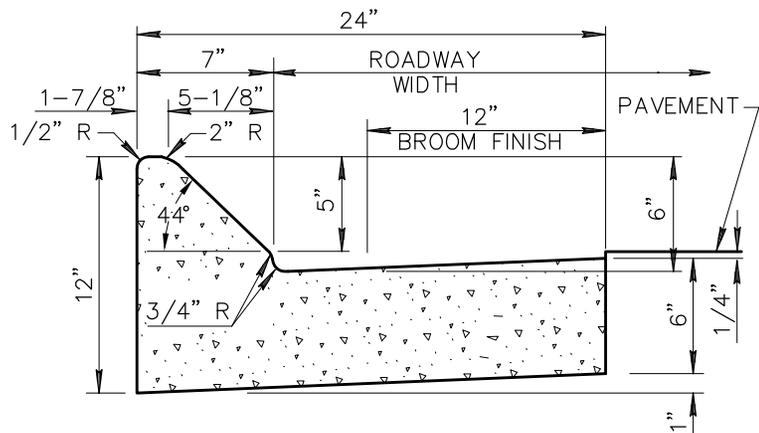


MOUNTABLE CURB AND GUTTER (TYPE E)

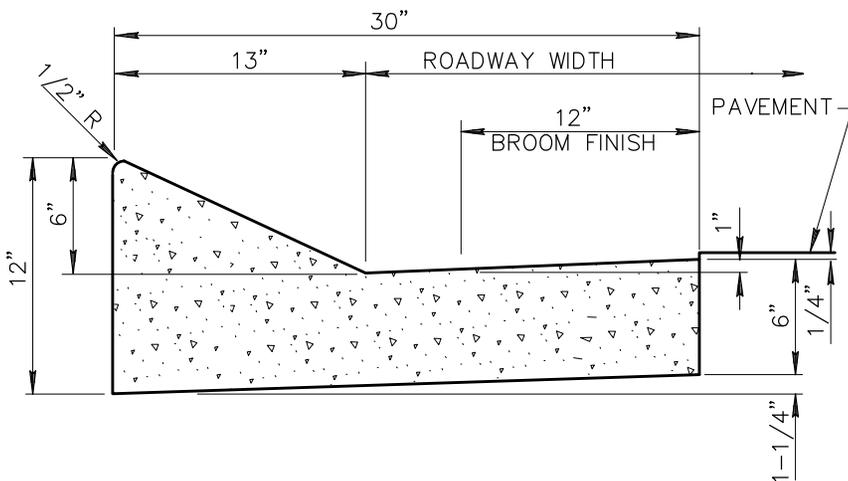

MOUNTABLE CURB AND GUTTER (TYPE F)

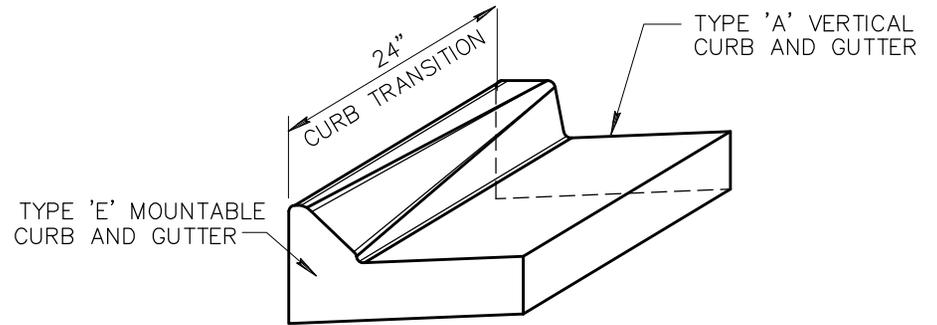

CURB TRANSITION TYPE 'E' TO TYPE 'A'

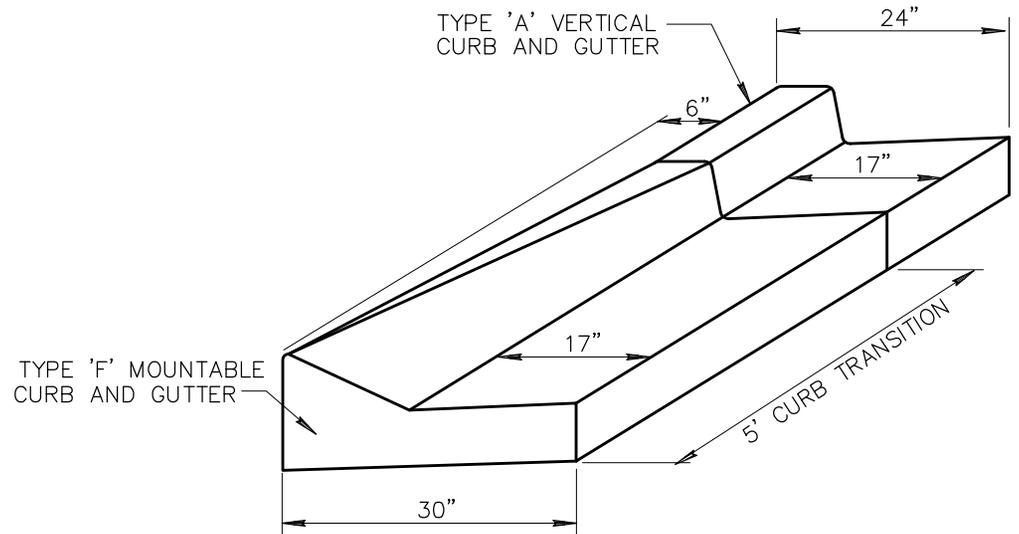

CURB TRANSITION TYPE 'F' TO TYPE 'A'

NOTES: (E & F)

1. ALL EXPOSED SURFACES TO BE TROWEL FINISHED EXCEPT AS SHOWN. SEE SECT. 340.
2. CONTRACTION JOINT SPACING 10' MAXIMUM.
3. EXPANSION JOINTS PER SECT. 340.
4. CLASS 'B' CONCRETE PER SECT. 725.
5. WHEN THE ADJACENT PAVEMENT SECTION SLOPES AWAY FROM THE GUTTER, THE SLOPE OF THE GUTTER PAN SHALL MATCH THE PAVEMENT CROSS SLOPE.

DETAIL NO.

220-2



**MARICOPA
ASSOCIATION of
GOVERNMENTS**

STANDARD DETAIL
ENGLISH


**CURB AND GUTTER
TYPES E AND F**

REVISED

01-01-2007

DETAIL NO.


220-2

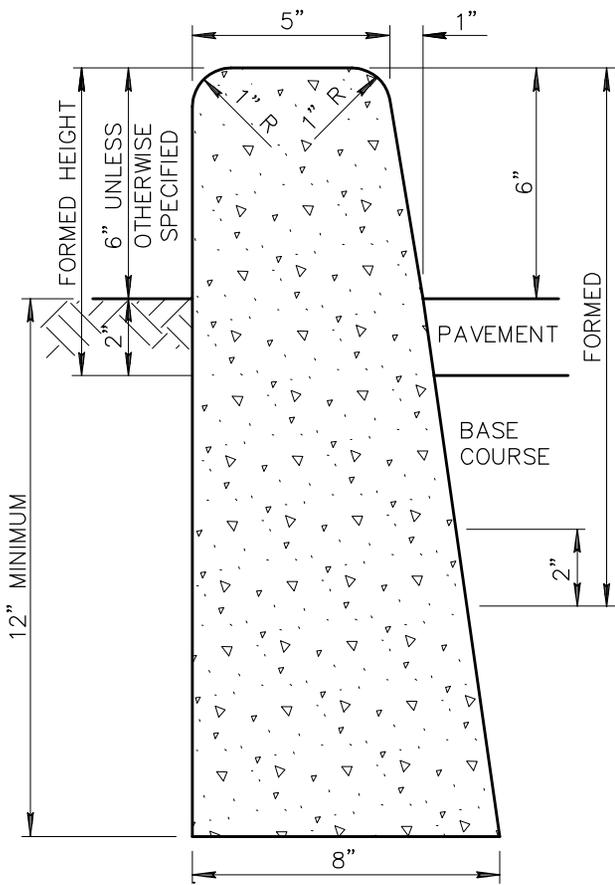


TYPE 'A'

NOTES:


1. ALL VERTICAL SURFACES TO BE FORMED.
2. VERTICAL SURFACES DOWN FROM 2" BELOW UNDISTURBED SOIL MAY BE PLACED AGAINST NEAT CUT IF APPROVED BY THE ENGINEER AND CONCRETE WILL NOT EXTEND MORE THAN 1" BEYOND THEORETICAL FACE.
3. ALL EXPOSED SURFACES TO BE STRIPPED GREEN AND TROWEL FINISHED.
4. CONCRETE CURBS CONFORM TO SECT. 340.
5. MAXIMUM SPACING OF CONTRACTION JOINTS IS 10'
6. CONCRETE TO BE CLASS 'B' PER SECT. 725.
7. WHEN PAVEMENT AND BASE COURSE EQUALS OR EXCEEDS 10" IN DEPTH, THE ENTIRE ROADWAY SIDE OF THE CURB SHALL BE FORMED. THE TOTAL CURB HEIGHT REMAINS 18" UNLESS NOTED OTHERWISE.

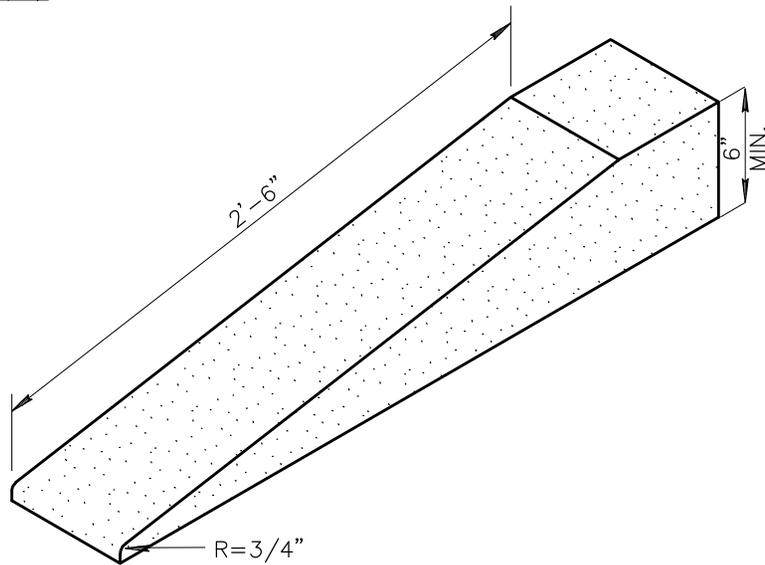

TYPICAL CURB TERMINATION

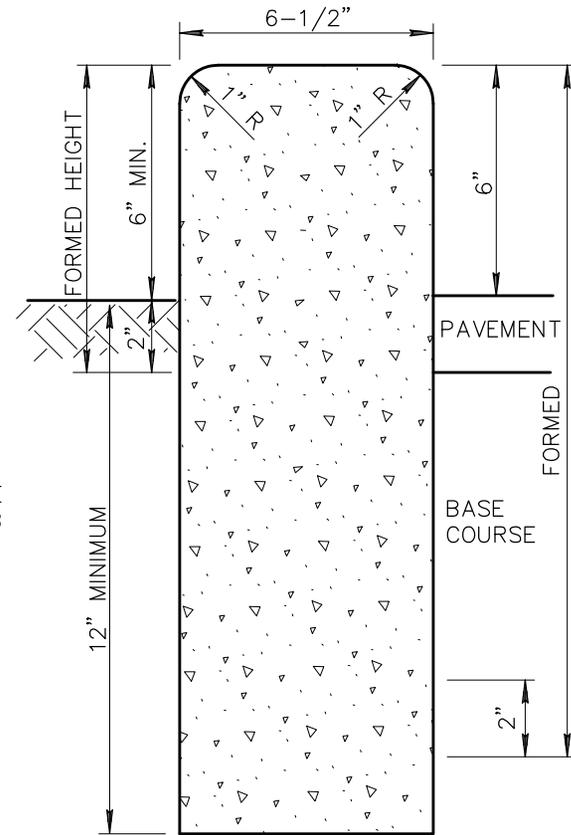

TYPE 'B'

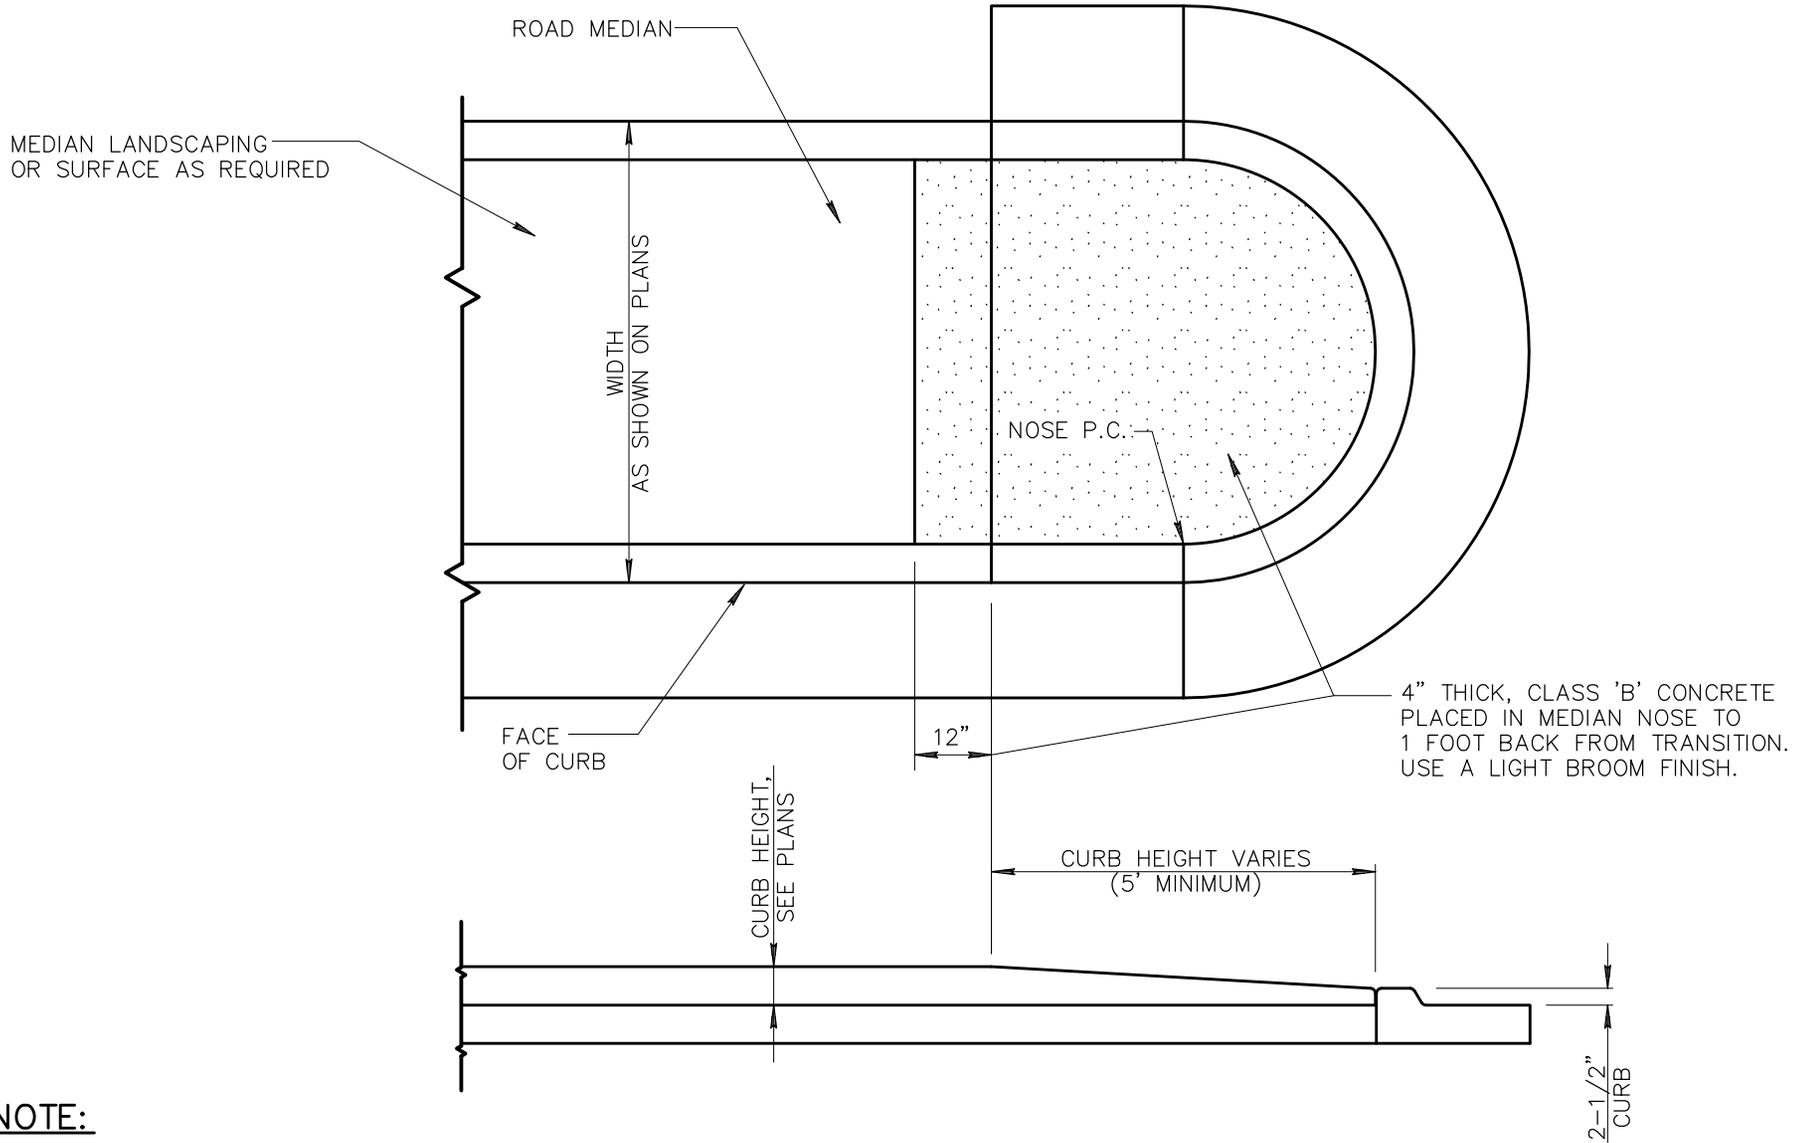

NOTE:

LENGTH OF TRANSITION SHALL BE EQUAL TO RADIUS OF MEDIAN NOSE, (5' MINIMUM). FOR LOCATION SEE PLANS.

DETAIL NO.

223



STANDARD DETAIL
ENGLISH







MEDIAN NOSE TRANSITION

REVISED

01-01-1998

DETAIL NO.


223

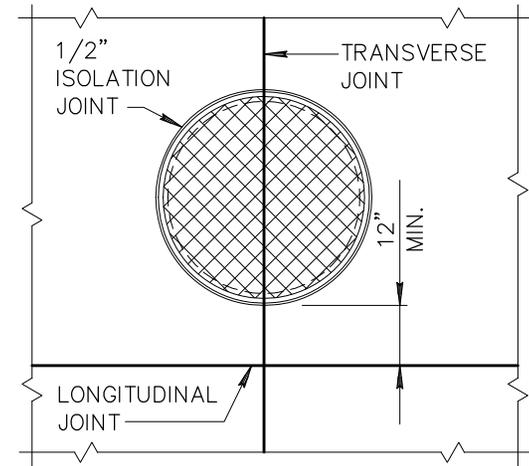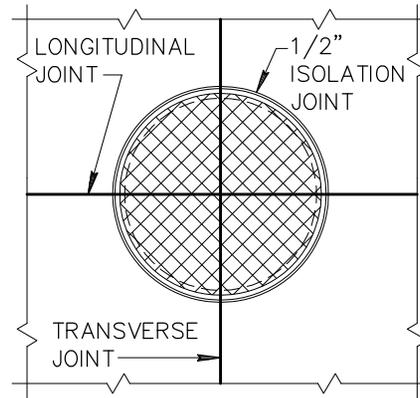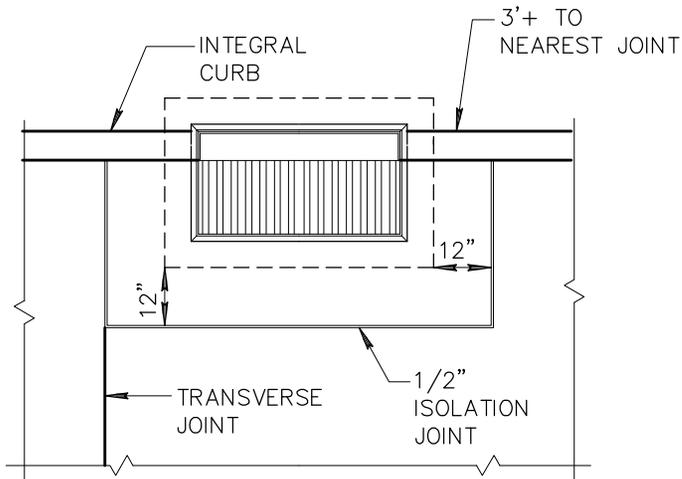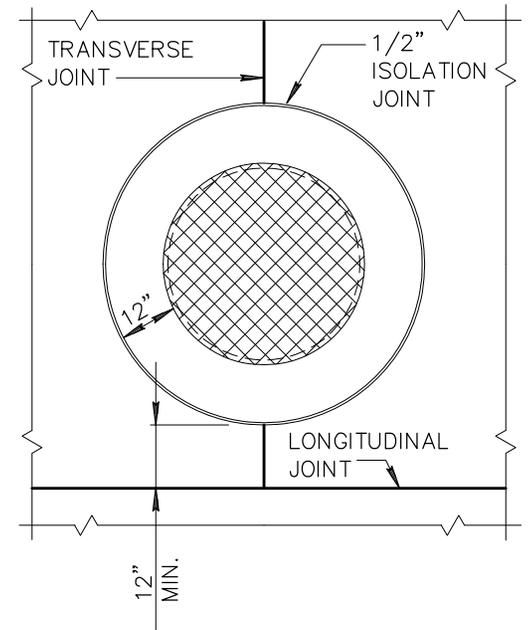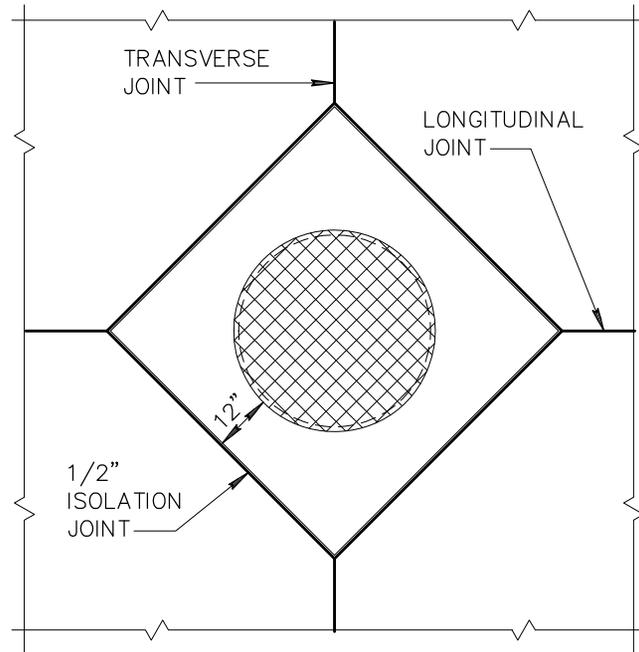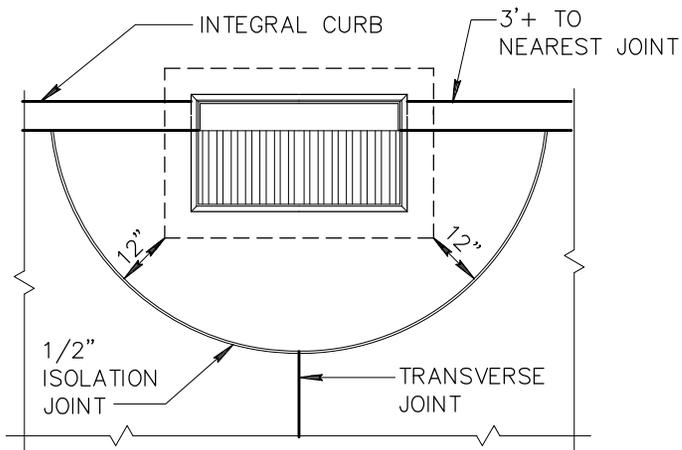

DRAINAGE INLET

MANHOLE COVERS


MANHOLE COVERS

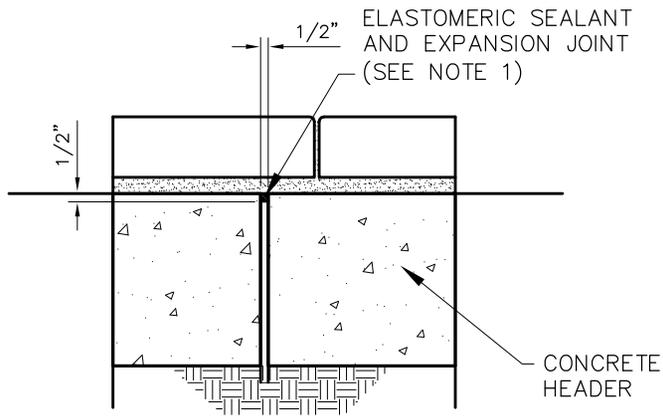

EXPANSION JOINT DETAIL

NOTES:

1. 1/2 INCH EXPANSION JOINT, ASTM D-1751 PER SEC. 729 AND ELASTOMERIC SEALANT PER SEC. 342
2. CONTRACTION JOINTS PER SEC. 342
3. MATERIALS AND CONSTRUCTION PER SEC. 342
4. PORTLAND CEMENT CONCRETE SHALL BE CLASS A
5. DESIGN PARAMETERS FOR THE THICKNESS IS BASED ON:
 ASSUMES MODULUS OF SUBGRADE REACTION (K) = 100 pci
 CONCRETE WORKING STRESS $f = 300$ psi
 TERMINAL SERVICABILITY INDEX I_p OF 2.5 OVER 20 YEARS
 AND 1 MILLION TOTAL EQUIVALENT 18-KIP SINGLE-AXLE
 LOAD APPLICATIONS

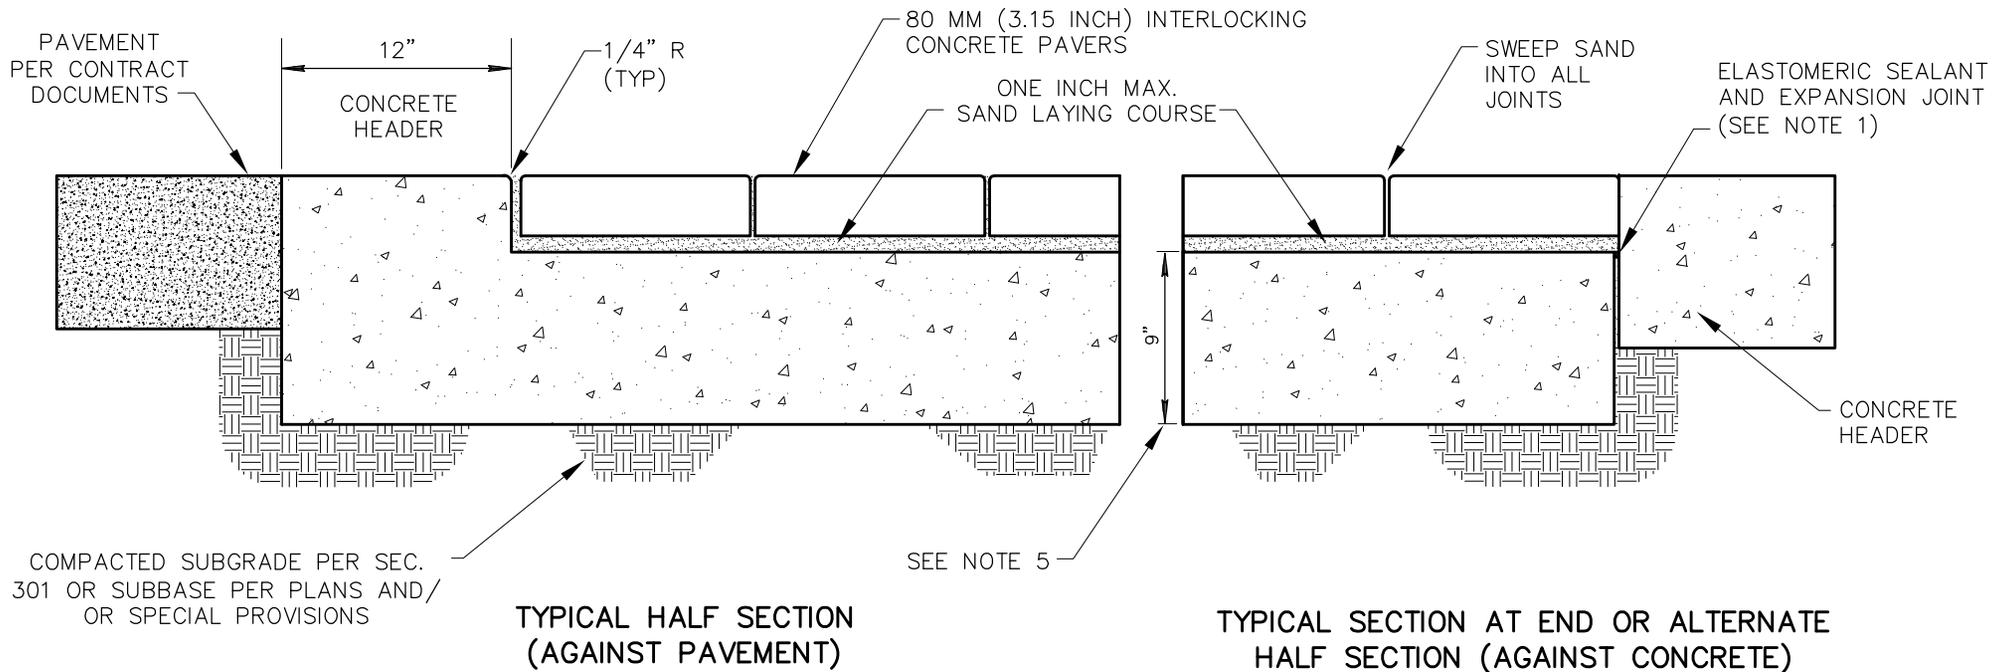

DETAIL NO.

225



STANDARD DETAIL
ENGLISH



CONCRETE PAVERS

REVISED

01-01-2005


DETAIL NO.

225

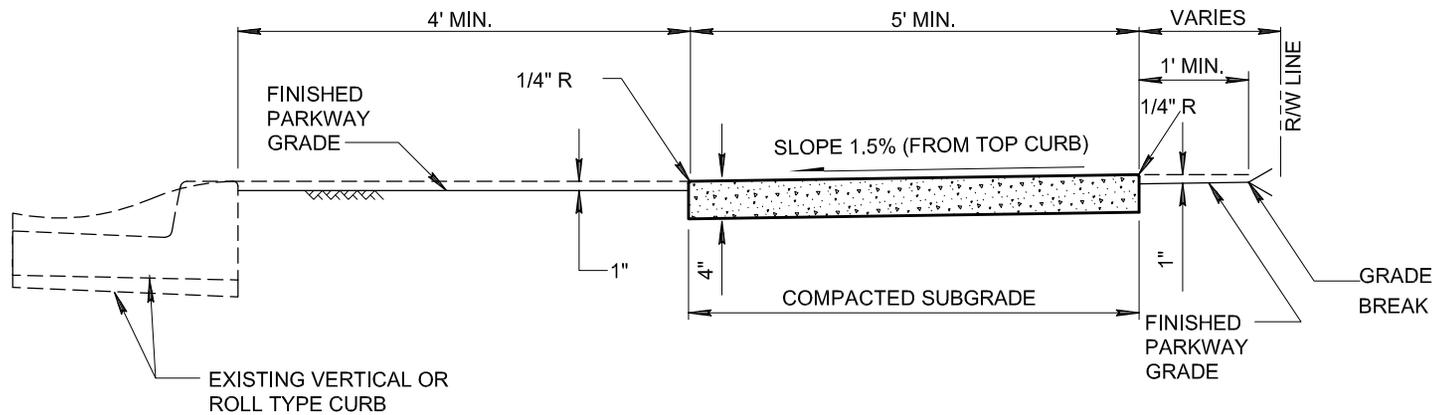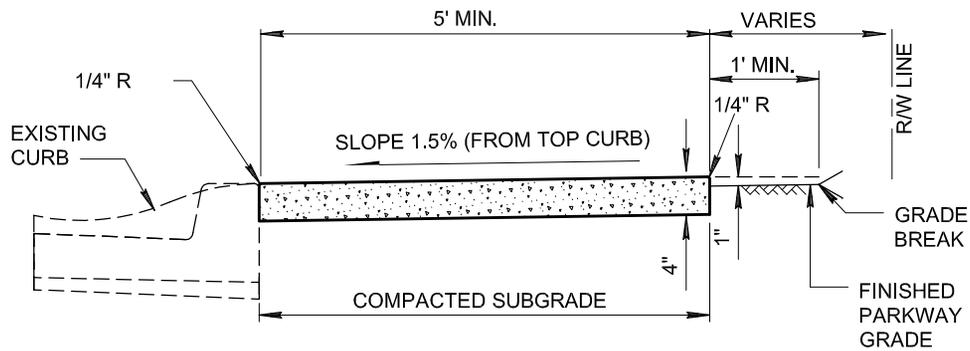


NOTES:

1. SIDEWALK CONSTRUCTION SHALL CONFORM TO SECTION 340.
2. EXPANSION JOINTS SHALL BE 1/2" BITUMINOUS TYPE PREFORMED EXPANSION JOINT FILLER, PER SECTION 729.
3. LARGE AGGREGATE, IN CONTRACTION JOINT SHALL BE SEPARATED TO A DEPTH OF 1", FINISH DEPTH SHALL BE A MINIMUM OF 3/4".
4. EXPANSION JOINTS SHALL CONFORM TO SECTION 340, BE INSTALLED PRIOR TO CONCRETE PLACEMENT, AND AT A MAXIMUM SPACING OF 50'.
5. CONCRETE SHALL BE CLASS 'B' PER SECTION 725.
6. WHEN SIDEWALK AND ADJACENT CURB ARE CONSTRUCTED MONOLITHICALLY, ALL EXPANSION AND CONTRACTION JOINTS SHALL EXTEND ACROSS THE CURB.

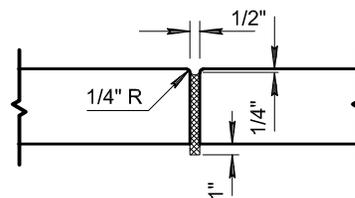

EXPANSION JOINT

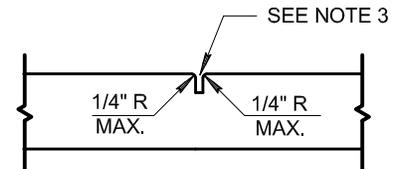

CONTRACTION JOINT

DETAIL NO.

230



STANDARD DETAIL
ENGLISH


SIDEWALKS

REVISED

01-01-2014

DETAIL NO.

230

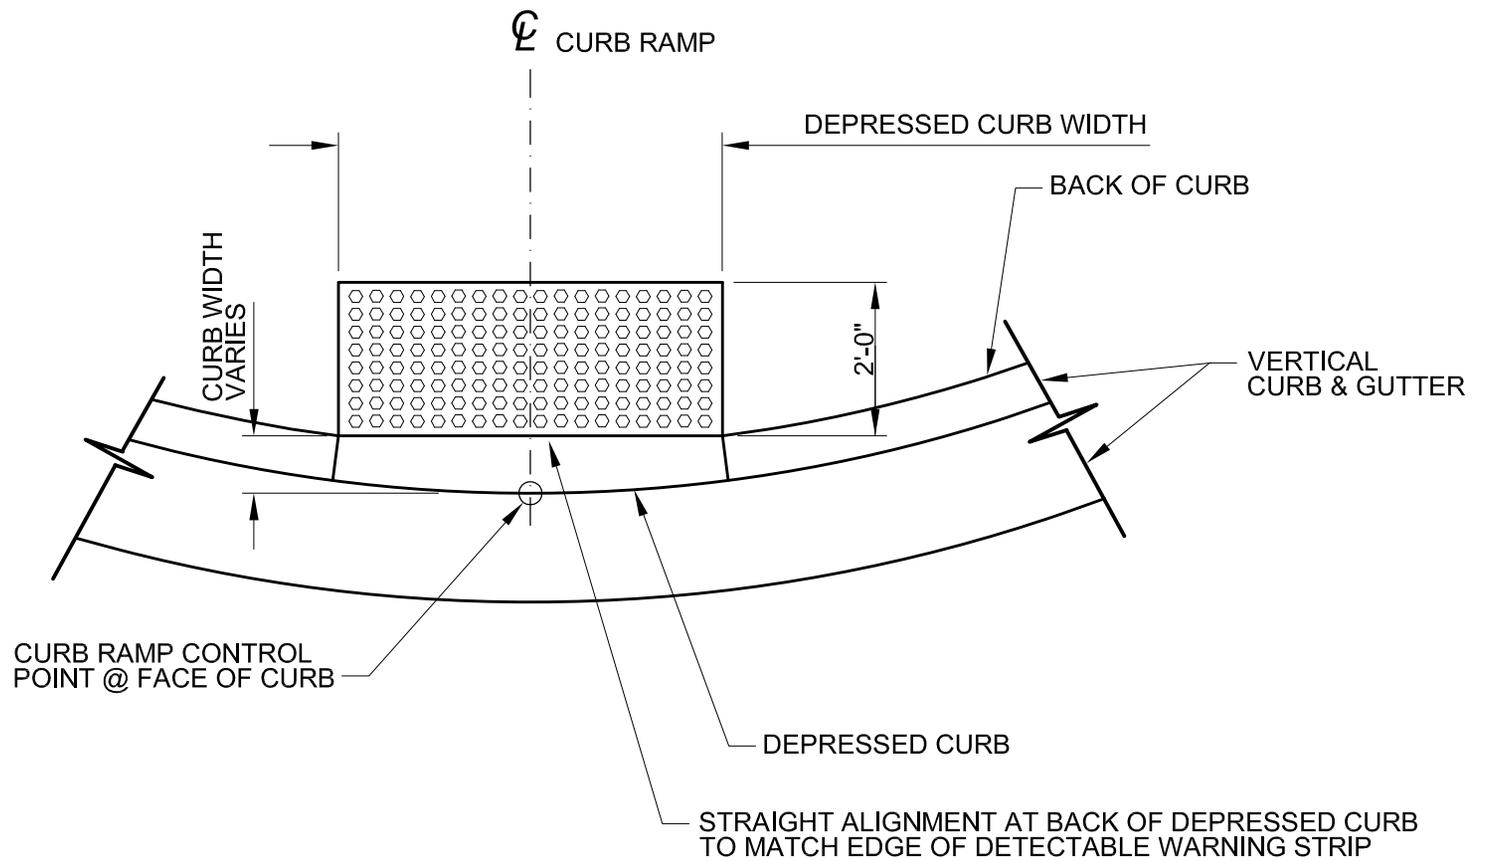

PLAN VIEW

DETAIL NO.

234



MARICOPA
ASSOCIATION of
GOVERNMENTS

STANDARD DETAIL
ENGLISH


**CURB MODIFICATION
AT DETECTABLE WARNING**

REVISED

01-01-2012

DETAIL NO.

234

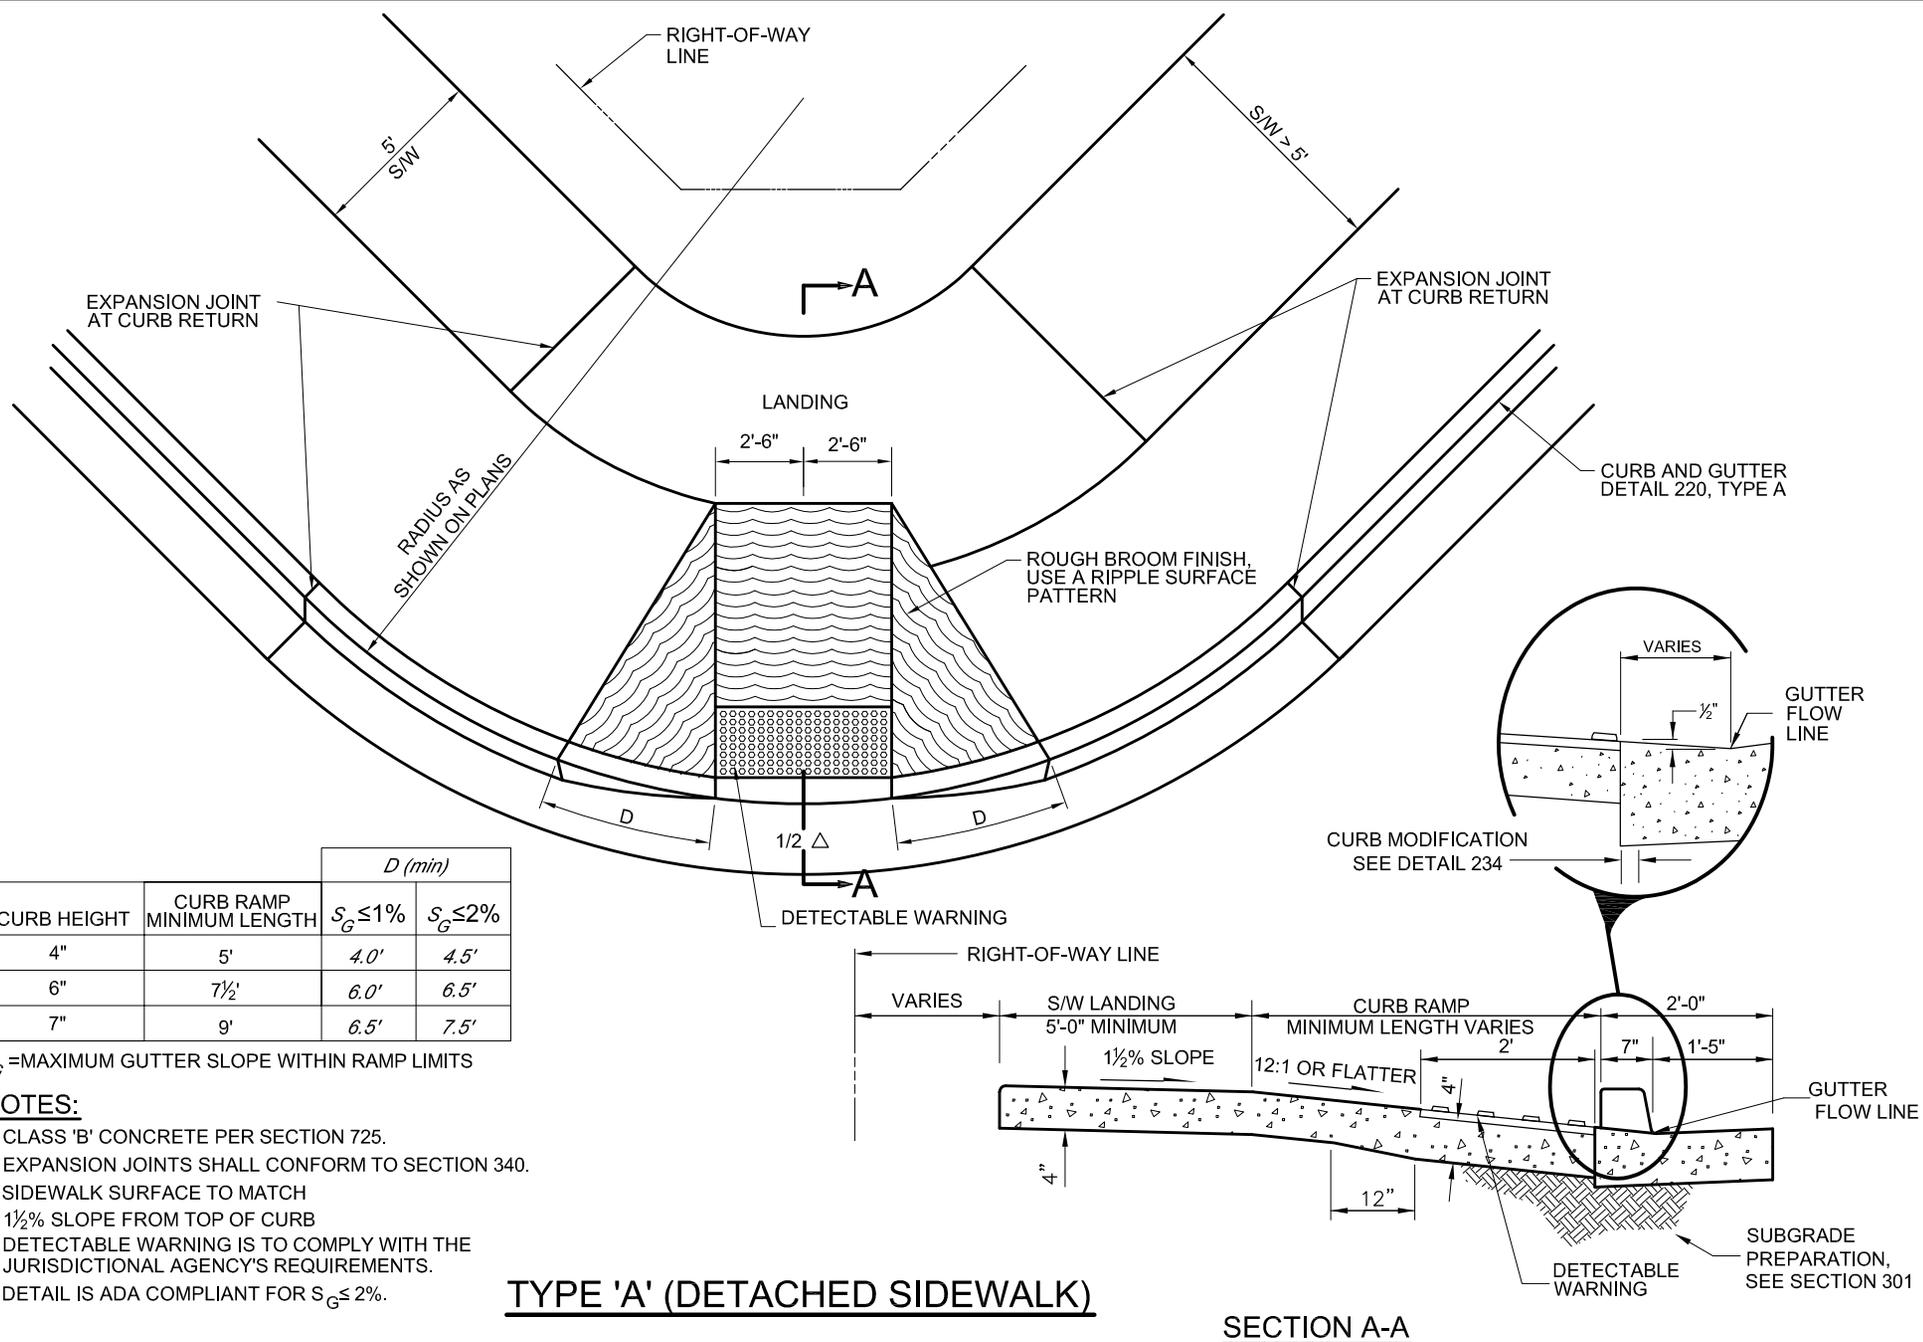

CURB HEIGHT	CURB RAMP MINIMUM LENGTH	<i>D (min)</i>	
		$S_G \leq 1\%$	$S_G \leq 2\%$
4"	5'	4.0'	4.5'
6"	7½'	6.0'	6.5'
7"	9'	6.5'	7.5'

S_G = MAXIMUM GUTTER SLOPE WITHIN RAMP LIMITS

NOTES:

1. CLASS 'B' CONCRETE PER SECTION 725.
2. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.
3. SIDEWALK SURFACE TO MATCH 1½% SLOPE FROM TOP OF CURB
4. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.
5. DETAIL IS ADA COMPLIANT FOR $S_G \leq 2\%$.

TYPE 'A' (DETACHED SIDEWALK)

SECTION A-A

DETAIL NO.

235-1




STANDARD DETAIL
ENGLISH

CURB RAMPS

REVISED
01-01-2012

DETAIL NO.
235-1

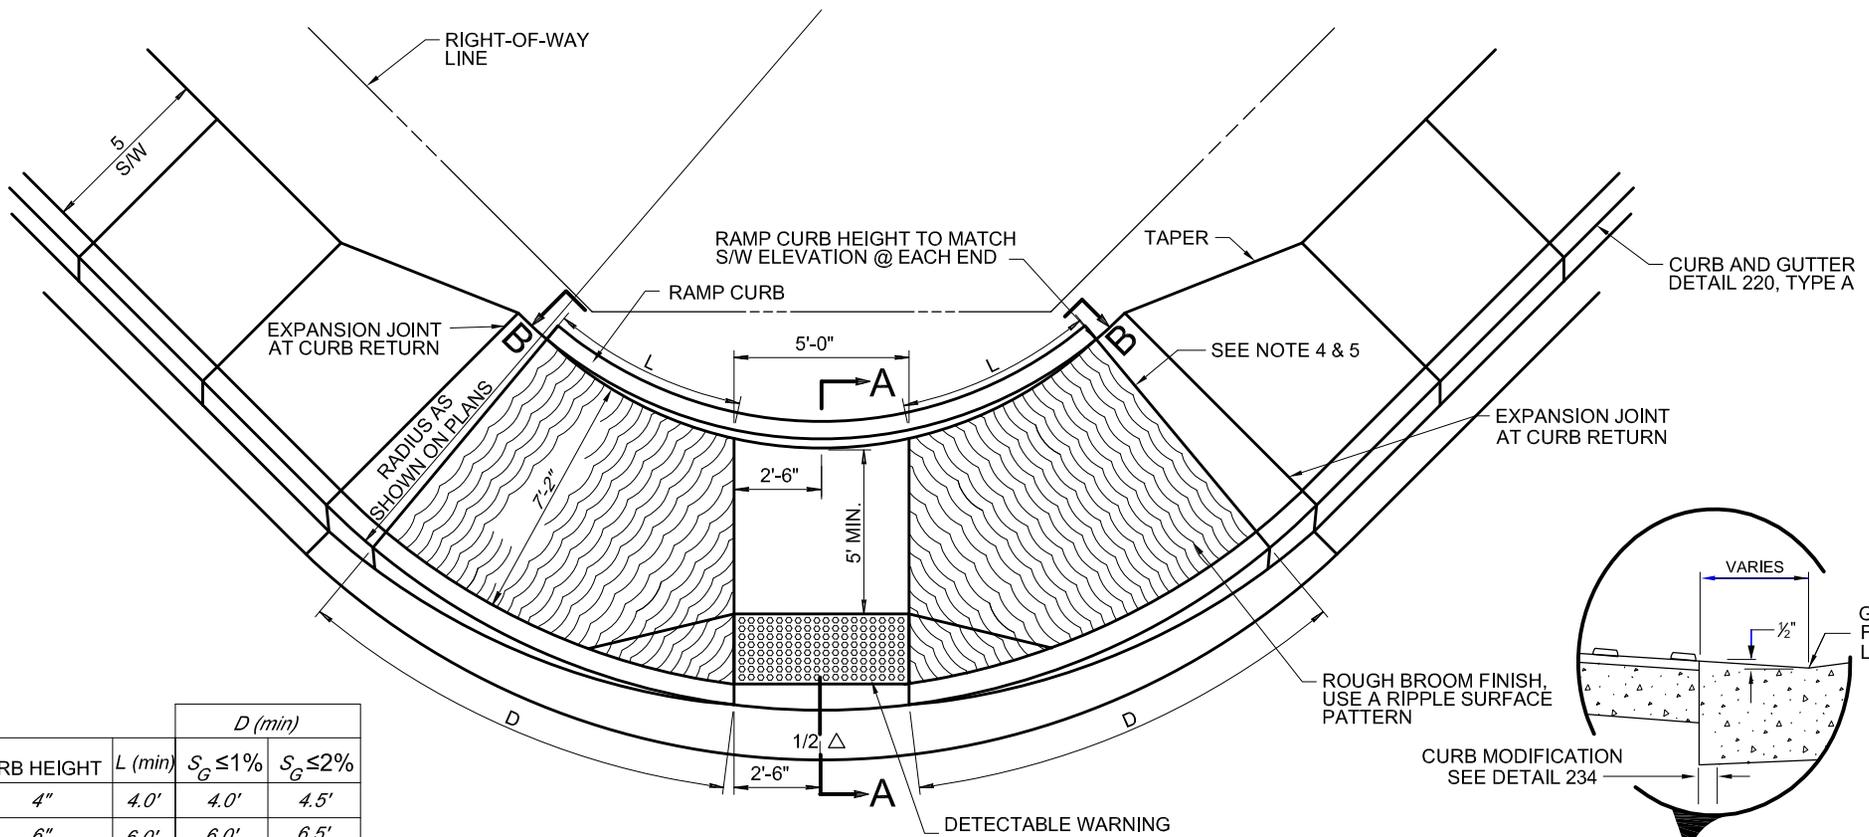


CURB HEIGHT	L (min)	D (min)	
		$S_G \leq 1\%$	$S_G \leq 2\%$
4"	4.0'	4.0'	4.5'
6"	6.0'	6.0'	6.5'
7"	7.0'	6.5'	7.5'


S_G = MAXIMUM GUTTER SLOPE WITHIN RAMP LIMITS

NOTES:

1. CLASS 'B' CONCRETE PER SECTION 725.
2. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.
3. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.
4. INCREASE 'L' OR 'D' AS NEEDED TO HAVE THE TOP OF RAMP FORM A RADIAL LINE.
5. WHEN TOP OF RAMP IS LESS THAN 4' FROM CURB RETURN, EXTEND RAMP TO THE CURB RETURN.
6. DETAIL IS ADA COMPLIANT FOR $S_G \leq 2\%$.

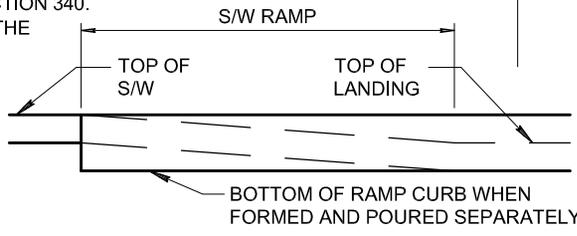

SECTION B-B

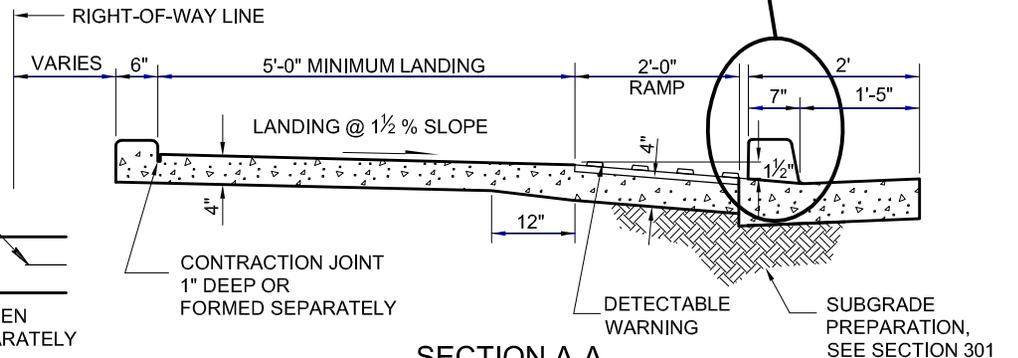

TYPE 'B'

SECTION A-A

DETAIL NO.
235-2



STANDARD DETAIL
ENGLISH



CURB RAMPS

REVISED
01-01-2012

DETAIL NO.
235-2



NOTES:

1. CLASS 'B' CONCRETE CONSTRUCTION PER SECTION 725.
2. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENT.
3. RAMP LONGITUDINAL SLOPE SHALL BE 12:1 OR FLATTER.
4. RAMP CROSS SLOPE SHALL BE 1½%.
5. DETAIL IS ADA COMPLIANT FOR CURB RADII ≥ 20' AND GUTTER SLOPE ≤ 2.0%.

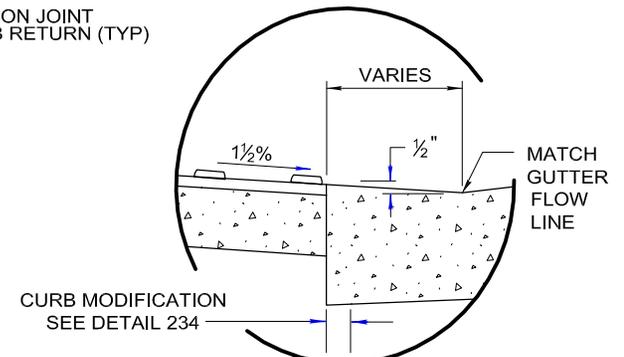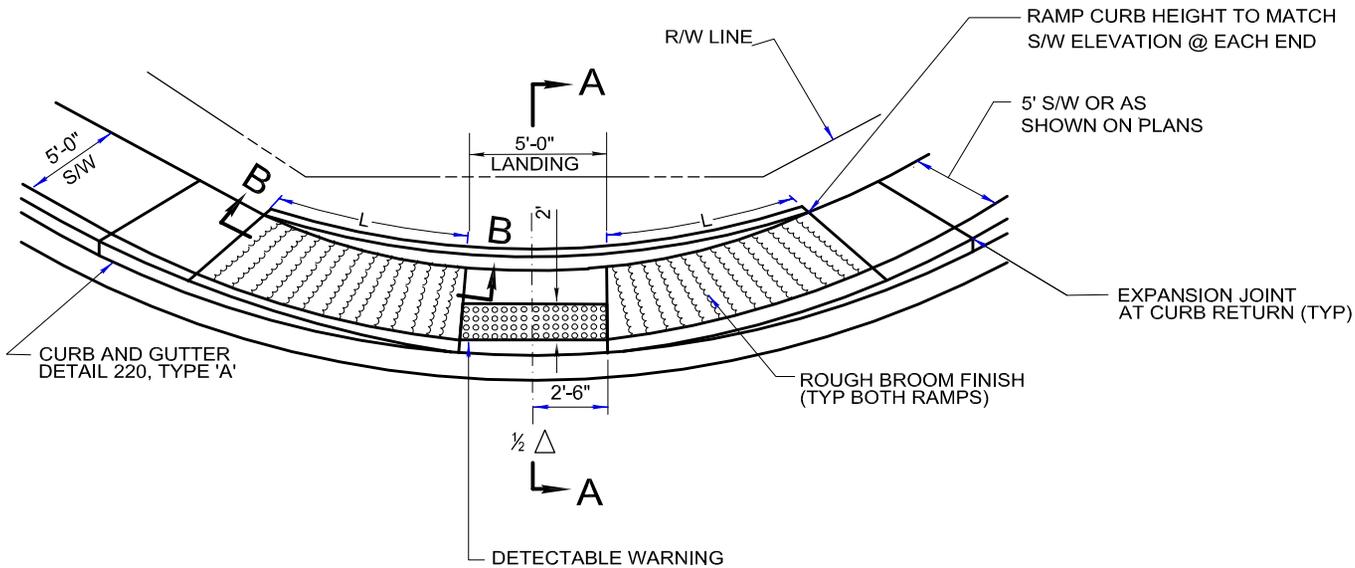


CURB HEIGHT	L (min)	
	$S_G \leq 1\%$	$S_G \leq 2\%$
4"	5.0'	6.0'
6"	7.0'	8.5'

S_G = MAXIMUM GUTTER SLOPE WITHIN RAMP LIMITS

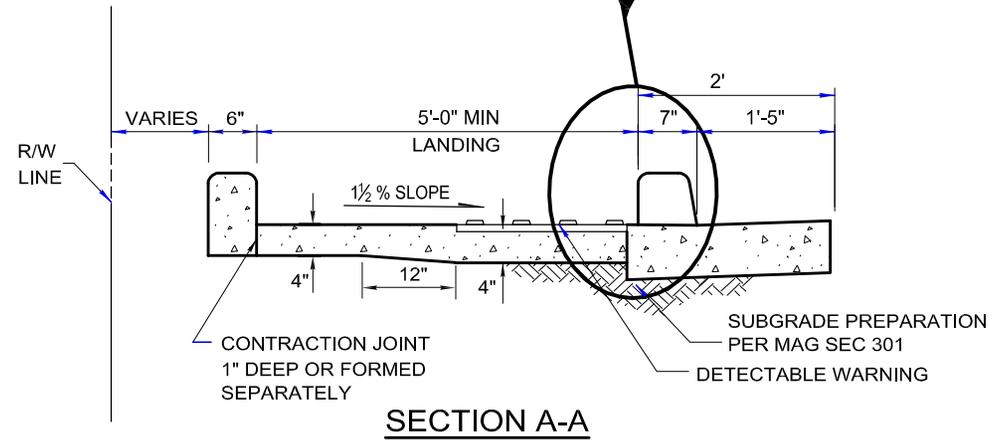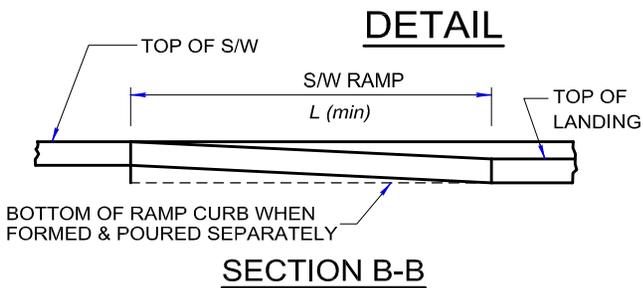

TYPE 'C'

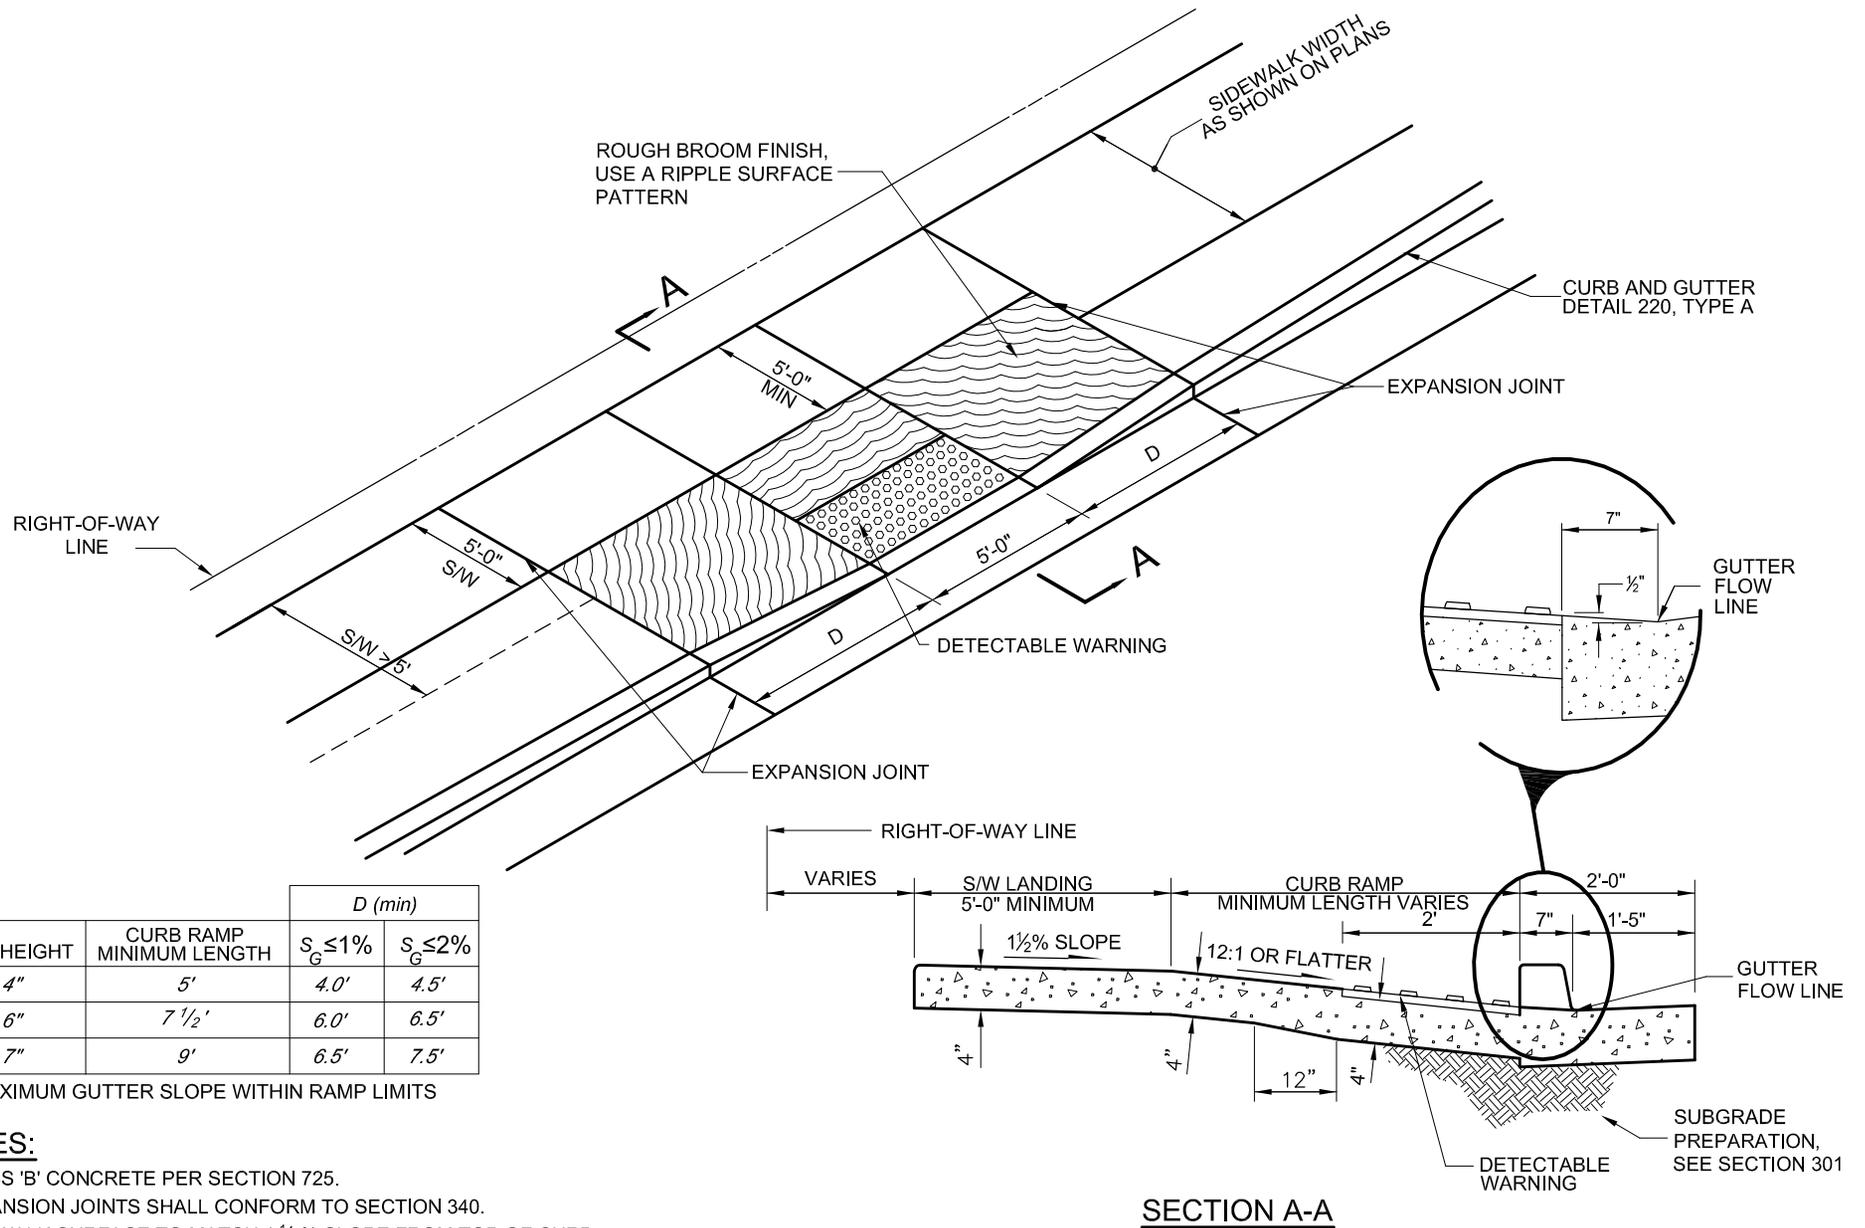

CURB HEIGHT	CURB RAMP MINIMUM LENGTH	D (min)	
		$S_G \leq 1\%$	$S_G \leq 2\%$
4"	5'	4.0'	4.5'
6"	7 1/2'	6.0'	6.5'
7"	9'	6.5'	7.5'

S_G = MAXIMUM GUTTER SLOPE WITHIN RAMP LIMITS

NOTES:

1. CLASS 'B' CONCRETE PER SECTION 725.
2. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.
3. SIDEWALK SURFACE TO MATCH 1 1/2 % SLOPE FROM TOP OF CURB.
4. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.
5. DETAIL IS ADA COMPLIANT FOR $S_G \leq 2\%$.

TYPE 'D' DETACHED SIDEWALK

DETAIL NO.
235-4




STANDARD DETAIL
ENGLISH

CURB RAMPS

REVISED
01-01-2011

DETAIL NO.
235-4

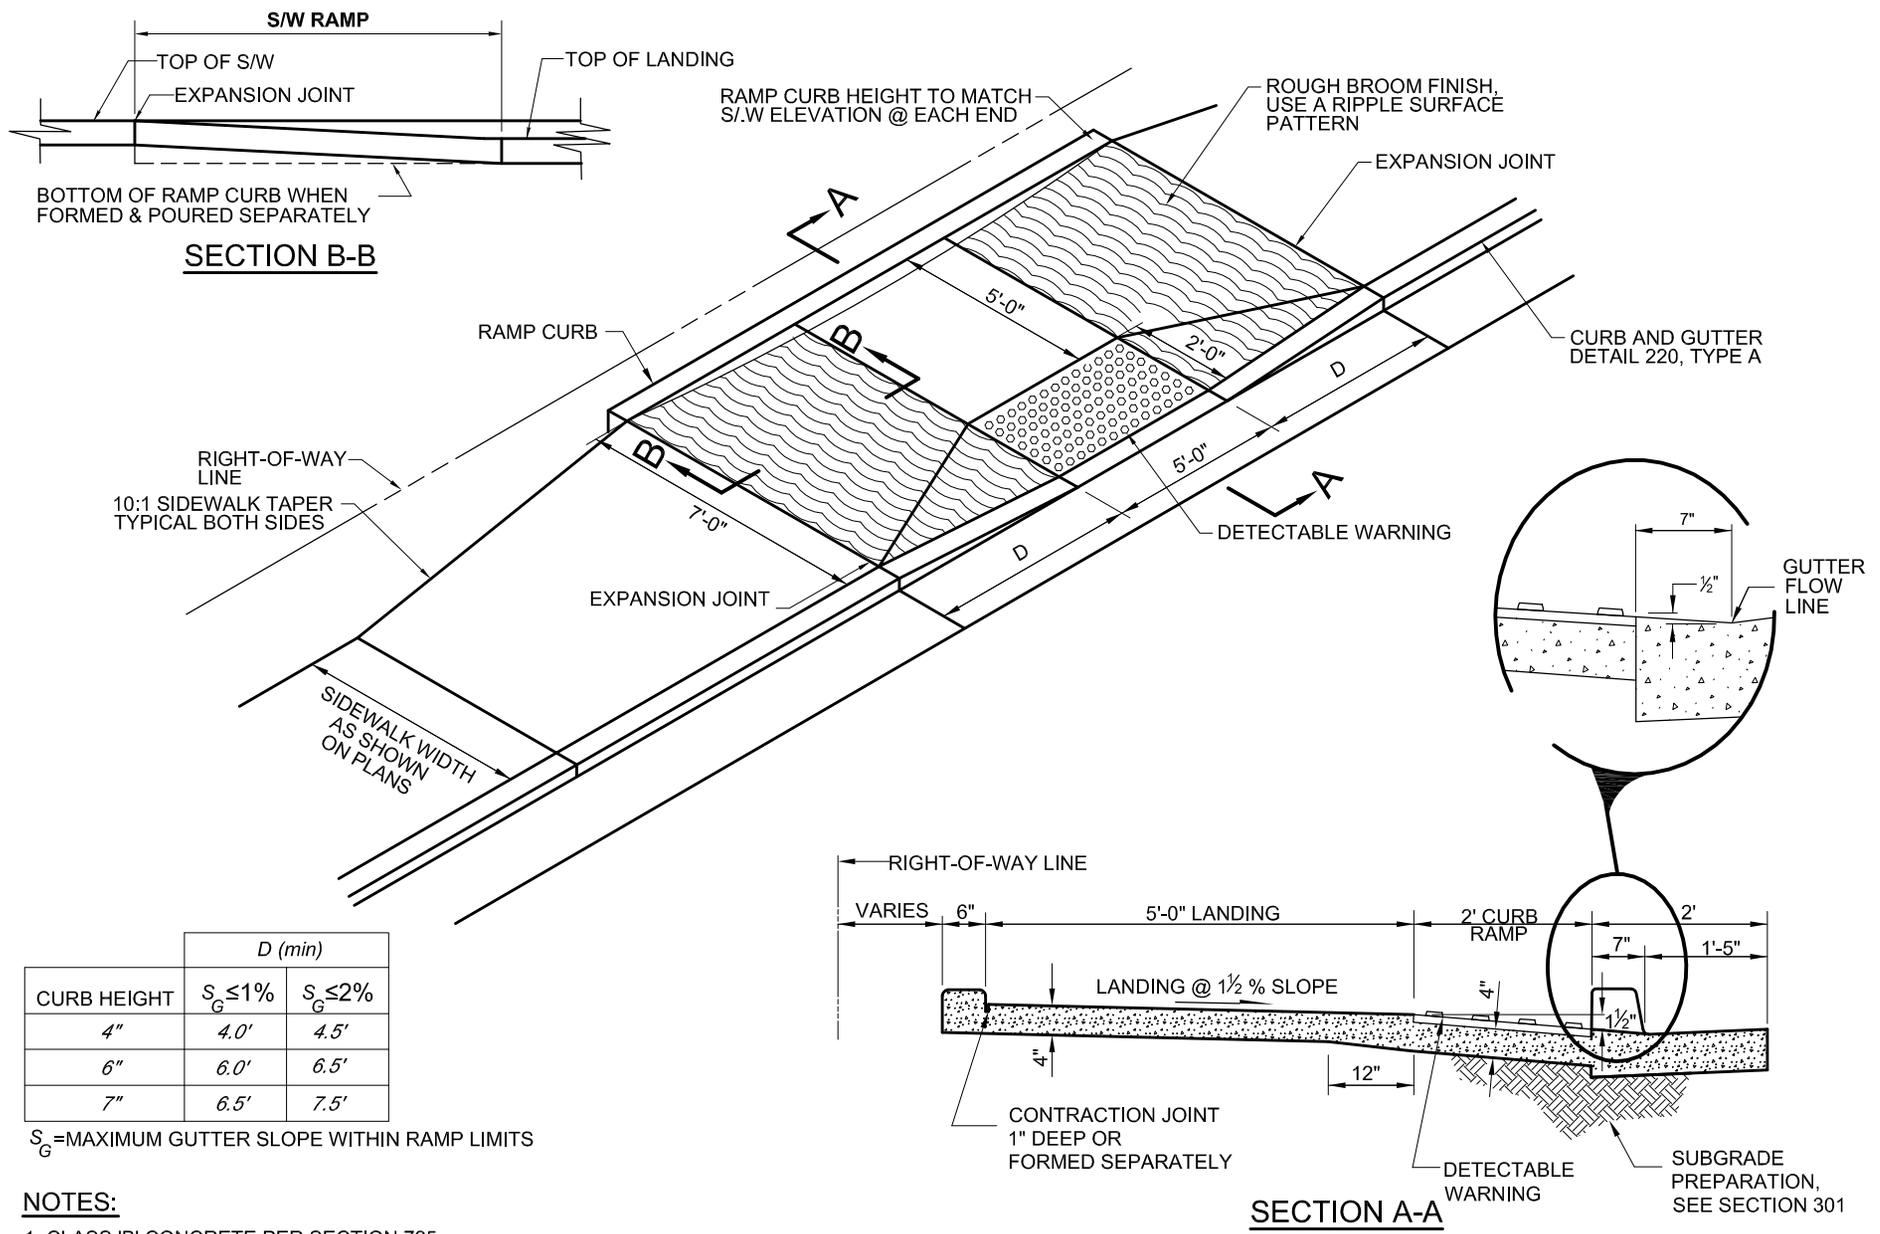


TYPE 'E'

- NOTES:**
1. CLASS 'B' CONCRETE PER SECTION 725.
 2. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.
 3. DETECTABLE WARNING IS TO COMPLY WITH THE JURISDICTIONAL AGENCY'S REQUIREMENTS.
 4. DETAIL IS ADA COMPLIANT FOR $S_G \leq 2\%$.

NOTES:

1. ALL CONCRETE TO BE CLASS 'A' UNLESS OTHERWISE APPROVED (SECTION 725).
2. EITHER A CONSTRUCTION JOINT OR CONTRACTION JOINT IS REQUIRED AT THE STREET CENTERLINE.
3. A SEPARATE CONCRETE PAD IS REQUIRED AT ALL EXPANSION JOINTS AND ALL CONSTRUCTION JOINTS.
4. EXPANSION JOINTS SHALL COMFORM TO SECTION 340.
5. CONTRACTION JOINTS SHALL SEPARATE LARGE AGGREGATE BY MOVING THE AGGREGATE TO EITHER SIDE OF THE JOINT FOR A MINIMUM DEPTH OF 2½ INCHES. THE FINISHED JOINT SHALL HAVE 1/4 INCH MAXIMUM RADII AT THE TOP SURFACE AND BE A MINIMUM OF 3/4 INCHES OF DEPTH.

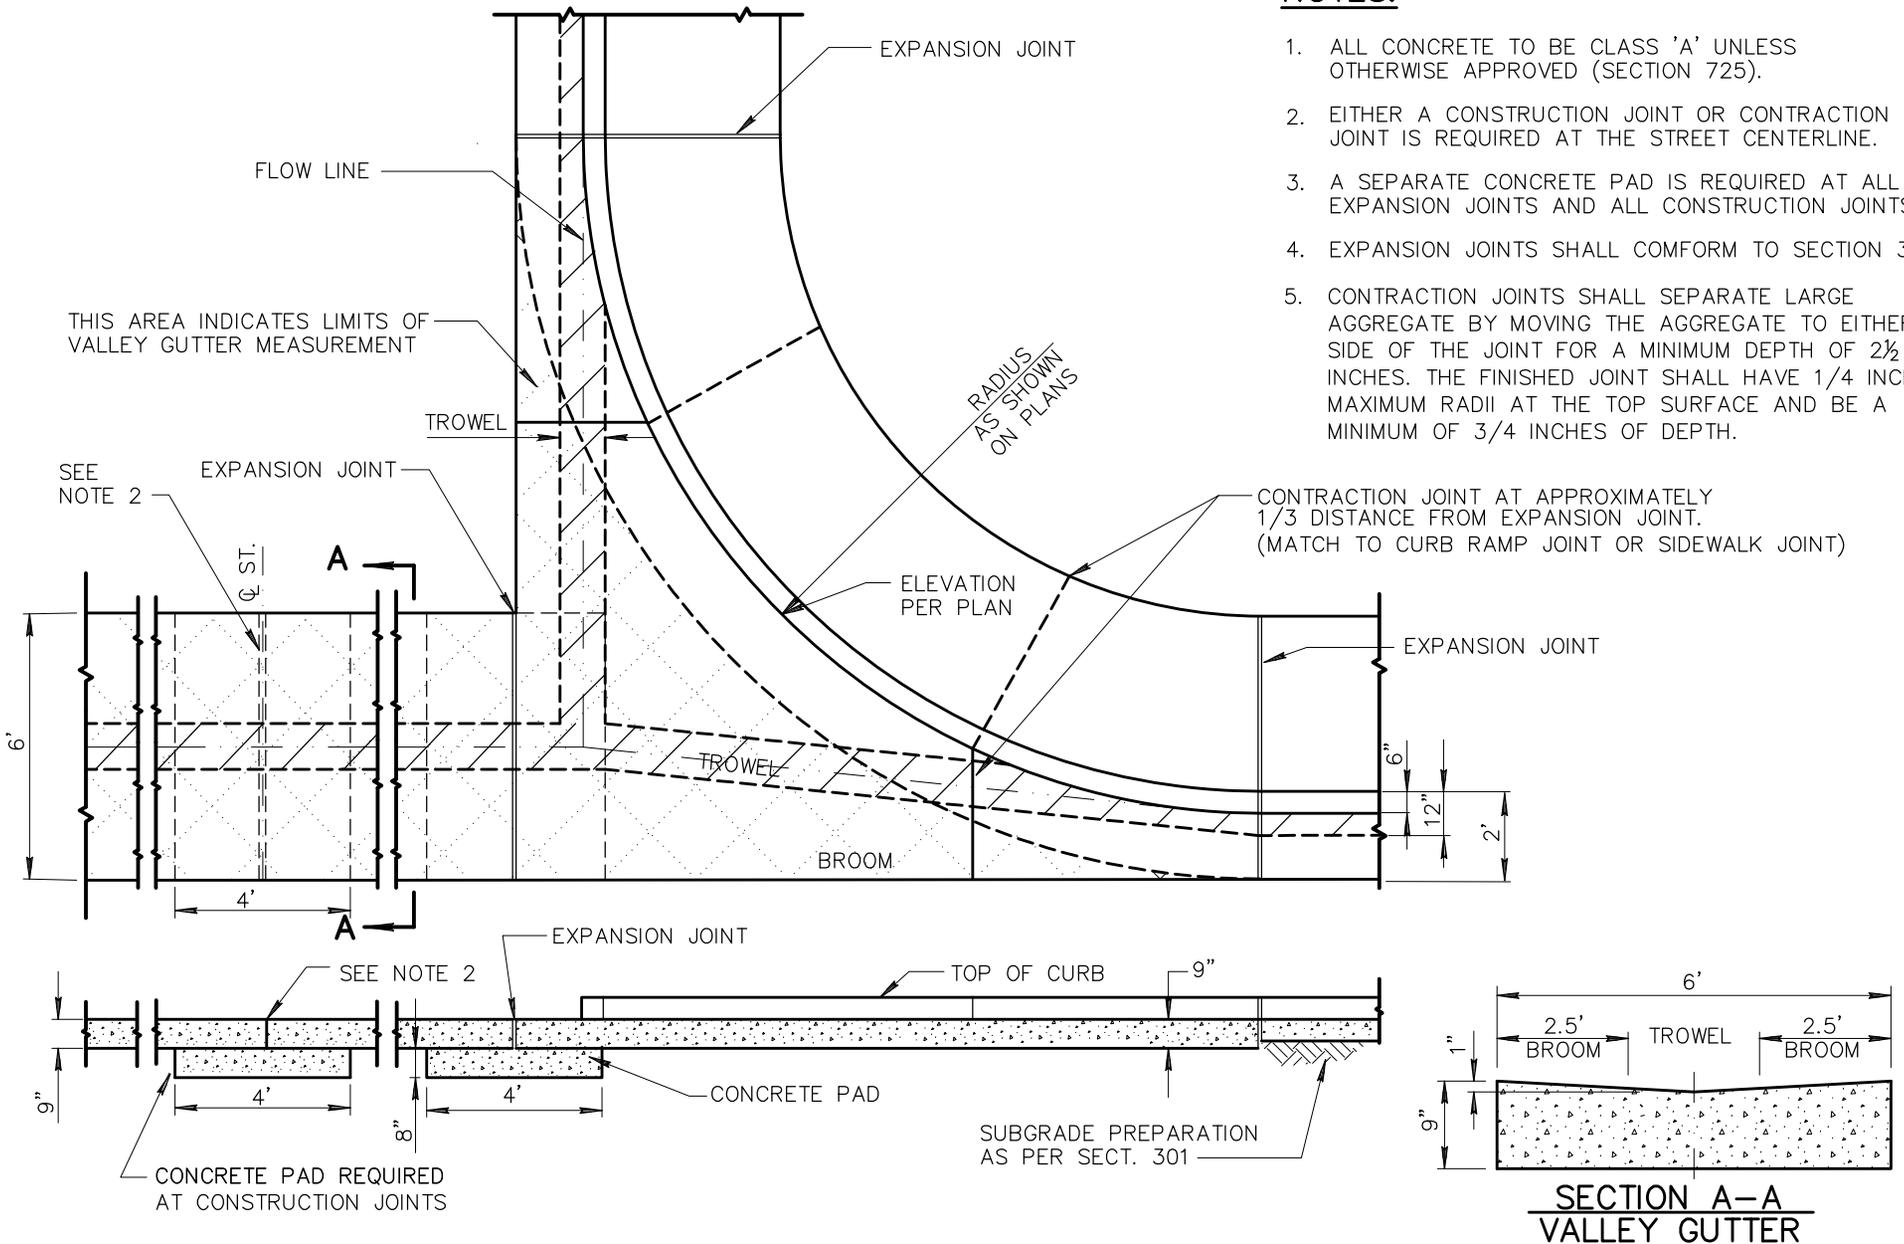

DETAIL NO.

240



STANDARD DETAIL
ENGLISH


VALLEY GUTTER

REVISED

01-01-2010

DETAIL NO.



240

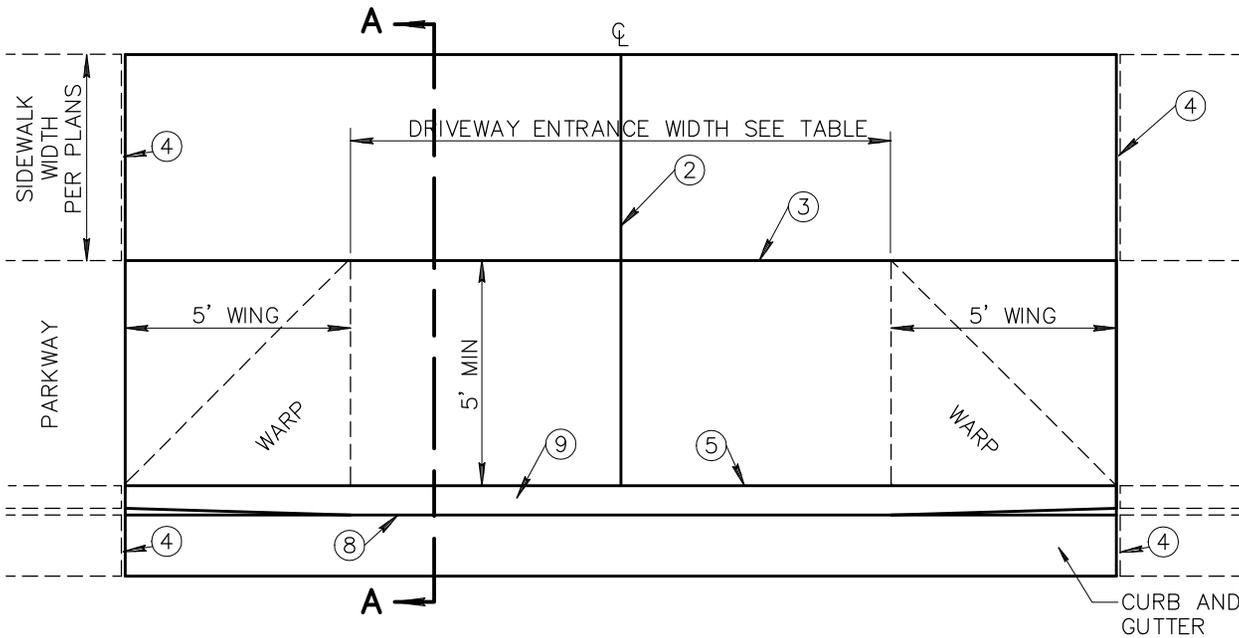

DRIVEWAY WITH DETACHED SIDEWALK

NOTES:

1. DEPRESSED CURB SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE TYPE OF CURB USED AT THAT LOCATION.
2. CONTRACTION JOINT ON D/W CENTERLINE.
3. CONTRACTION JOINT.
4. 1/2-INCH EXPANSION JOINTS SHALL COMPLY WITH SECTION 340.
5. BACK OF CURB - CONSTRUCTION JOINT.
6. CONCRETE CLASS AS NOTED IN TABLE. CONCRETE PER SECTION 725.
7. SUBGRADE PREPARATION, SECT. 301.
8. FLOW LINE OF GUTTER.
9. DEPRESSED CURB.
10. SECT. A-A AND ELEVATION: D/W SHOWN WITH VERTICAL CURB AND GUTTER, ROLL TYPE CURB AND GUTTER TREATED SIMILARLY.
11. ROUGH BROOM FINISH FULL WIDTH OF RAMP AND WINGS.
12. TROWEL AND USE LIGHT HAIR BROOM FINISH FOR WALKWAY AREA.
13. 'DRIVEWAY ENTRANCE WIDTH' IS THE DRIVEWAY WIDTH PLUS ADDITIONAL WIDENING REQUIRED BY THE LOCAL JURISDICTION.
14. ELEVATION AT TOP OF DRIVEWAY RAMP SHALL BE EQUAL TO OR HIGHER THAN NORMAL CURB ELEVATION.

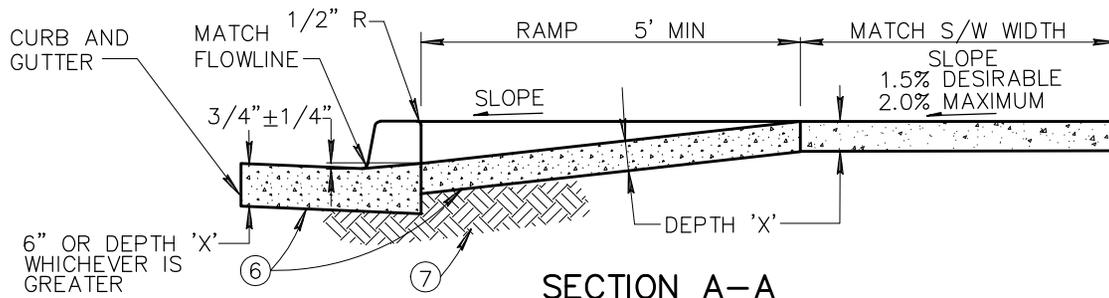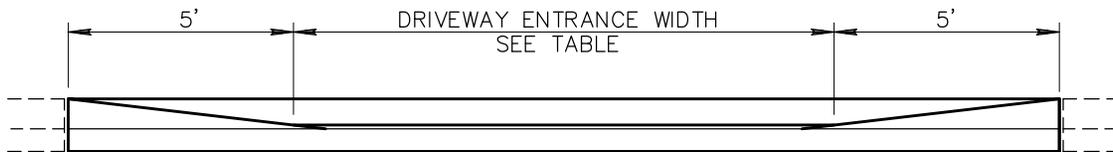

COMMERCIAL AND INDUSTRIAL

DRIVEWAY ENTRANCE WIDTH	MIN.	MAX.	CLASS	DEPTH 'X'
COMMERCIAL	* 16'	40'	A	9"
INDUSTRIAL	* 16'	40'	A	9"
* 24' MIN. FOR TWO WAY TRAFFIC				

RESIDENTIAL

DRIVEWAY ENTRANCE WIDTH	MIN.	MAX.	CLASS	DEPTH 'X'
MAJOR STREET	16'	30'	B	5"
COLLECTOR STREET	* 12'	30'	B	5"
LOCAL STREET	12'	30'	B	5"
* 16' DESIRABLE				

DETAIL NO.

250-1



STANDARD DETAIL
ENGLISH


**DRIVEWAY ENTRANCES WITH
DETACHED SIDEWALK**

REVISED



01-01-2014

DETAIL NO.

250-1

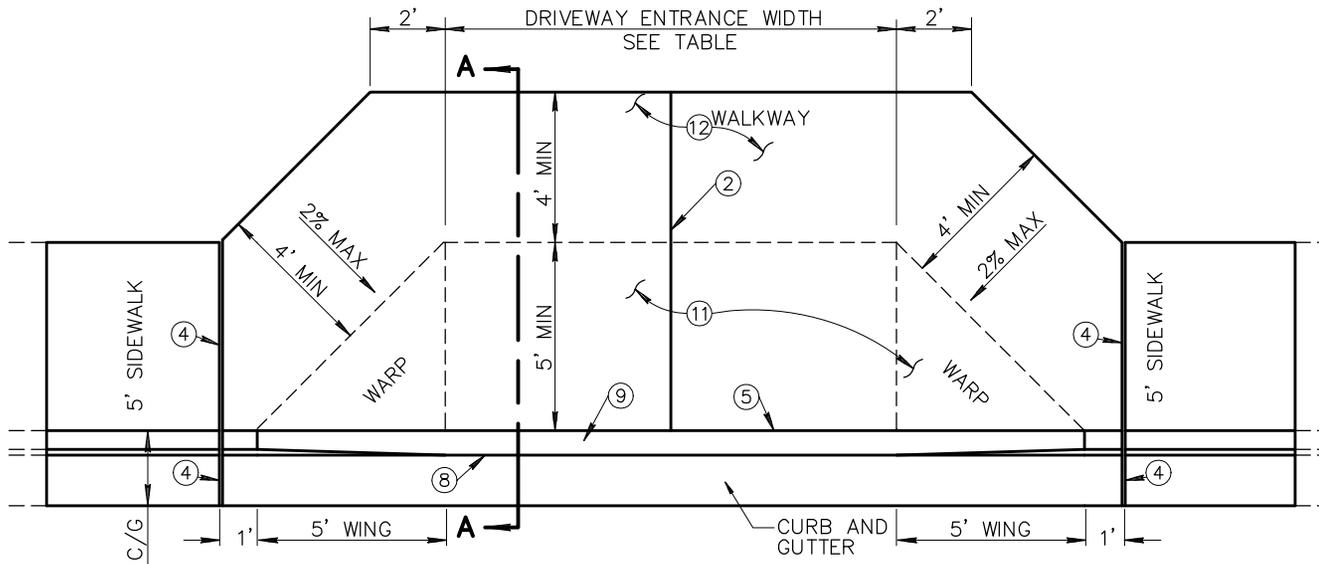

DRIVEWAY WITH SIDEWALK ATTACHED TO CURB

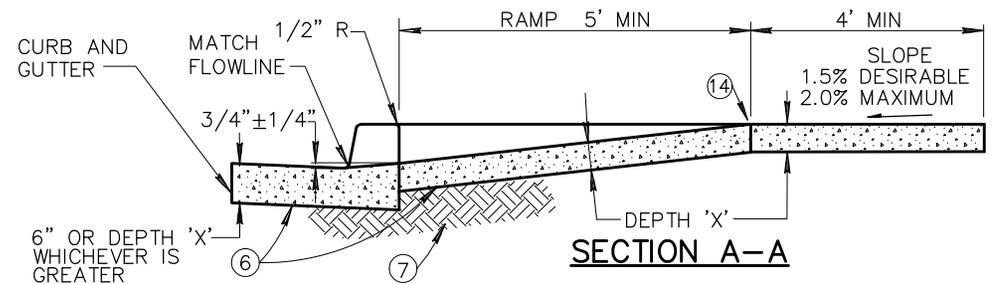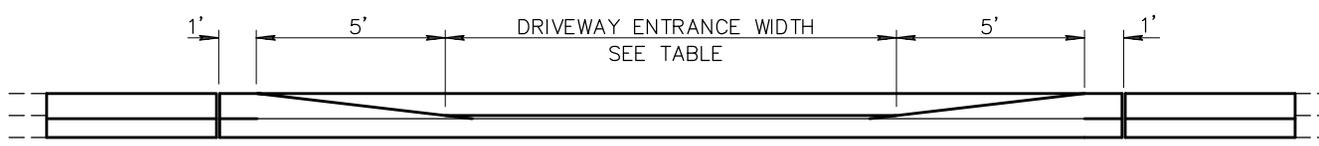

COMMERCIAL AND INDUSTRIAL					RESIDENTIAL				
DRIVEWAY ENTRANCE WIDTH	MIN.	MAX.	CLASS	DEPTH 'X'	DRIVEWAY ENTRANCE WIDTH	MIN.	MAX.	CLASS	DEPTH 'X'
COMMERCIAL	* 16'	40'	A	9"	MAJOR STREET	16'	30'	B	5"
INDUSTRIAL	* 16'	40'	A	9"	COLLECTOR STREET	* 12'	30'	B	5"
* 24' MIN. FOR TWO WAY TRAFFIC					LOCAL STREET	12'	30'	B	5"
					* 16' DESIRABLE				

NOTES:

- DEPRESSED CURB SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE TYPE OF CURB USED AT THAT LOCATION.
- CONTRACTION JOINT(S) FOR DRIVEWAY ENTRANCE: WIDTH LESS THAN 22' NONE REQUIRED; WIDTH GREATER THAN 22' AND LESS THAN 30' LOCATE SINGLE JOINT ON D/W CENTERLINE; WIDTH OF 30' OR GREATER LOCATE TWO JOINTS TO EQUALLY DIVIDE THE DRIVEWAY ENTRANCE WIDTH.
- DETAIL GEOMETRICS ARE BASED ON A CURB HEIGHT OF SIX INCHES (6"), AN ATTACHED SIDEWALK WIDTH OF FIVE FEET (5'), AND A DRIVEWAY RAMP LENGTH NOT EXCEEDING SIX FEET (6'). GEOMETRIC MODIFICATIONS MAY BE REQUIRED WHEN CONDITIONS ARE MODIFIED.
- 1/2-INCH EXPANSION JOINTS SHALL COMPLY WITH SECTION 340.
- BACK OF CURB - CONSTRUCTION JOINT.
- CONCRETE CLASS AS NOTED IN TABLE. CONCRETE PER SECTION 725.
- SUBGRADE PREPARATION, SECT. 301.
- FLOW LINE OF GUTTER.
- DEPRESSED CURB.
- SECT. A-A AND ELEVATION: D/W SHOWN WITH VERTICAL CURB AND GUTTER, ROLL TYPE CURB AND GUTTER TREATED SIMILARLY.
- ROUGH BROOM FINISH FULL WIDTH OF RAMP AND WINGS.
- TROWEL AND USE LIGHT HAIR BROOM FINISH FOR WALKWAY AREA.
- 'DRIVEWAY ENTRANCE WIDTH' IS THE DRIVEWAY WIDTH PLUS ADDITIONAL WIDENING REQUIRED BY THE LOCAL JURISDICTION.
- ELEVATION AT TOP OF DRIVEWAY RAMP SHALL BE EQUAL TO OR HIGHER THAN NORMAL CURB ELEVATION.

DETAIL NO.
250-2




STANDARD DETAIL
ENGLISH

**DRIVEWAY ENTRANCES WITH
SIDEWALK ATTACHED TO CURB**

REVISED
01-01-2013

DETAIL NO.
250-2

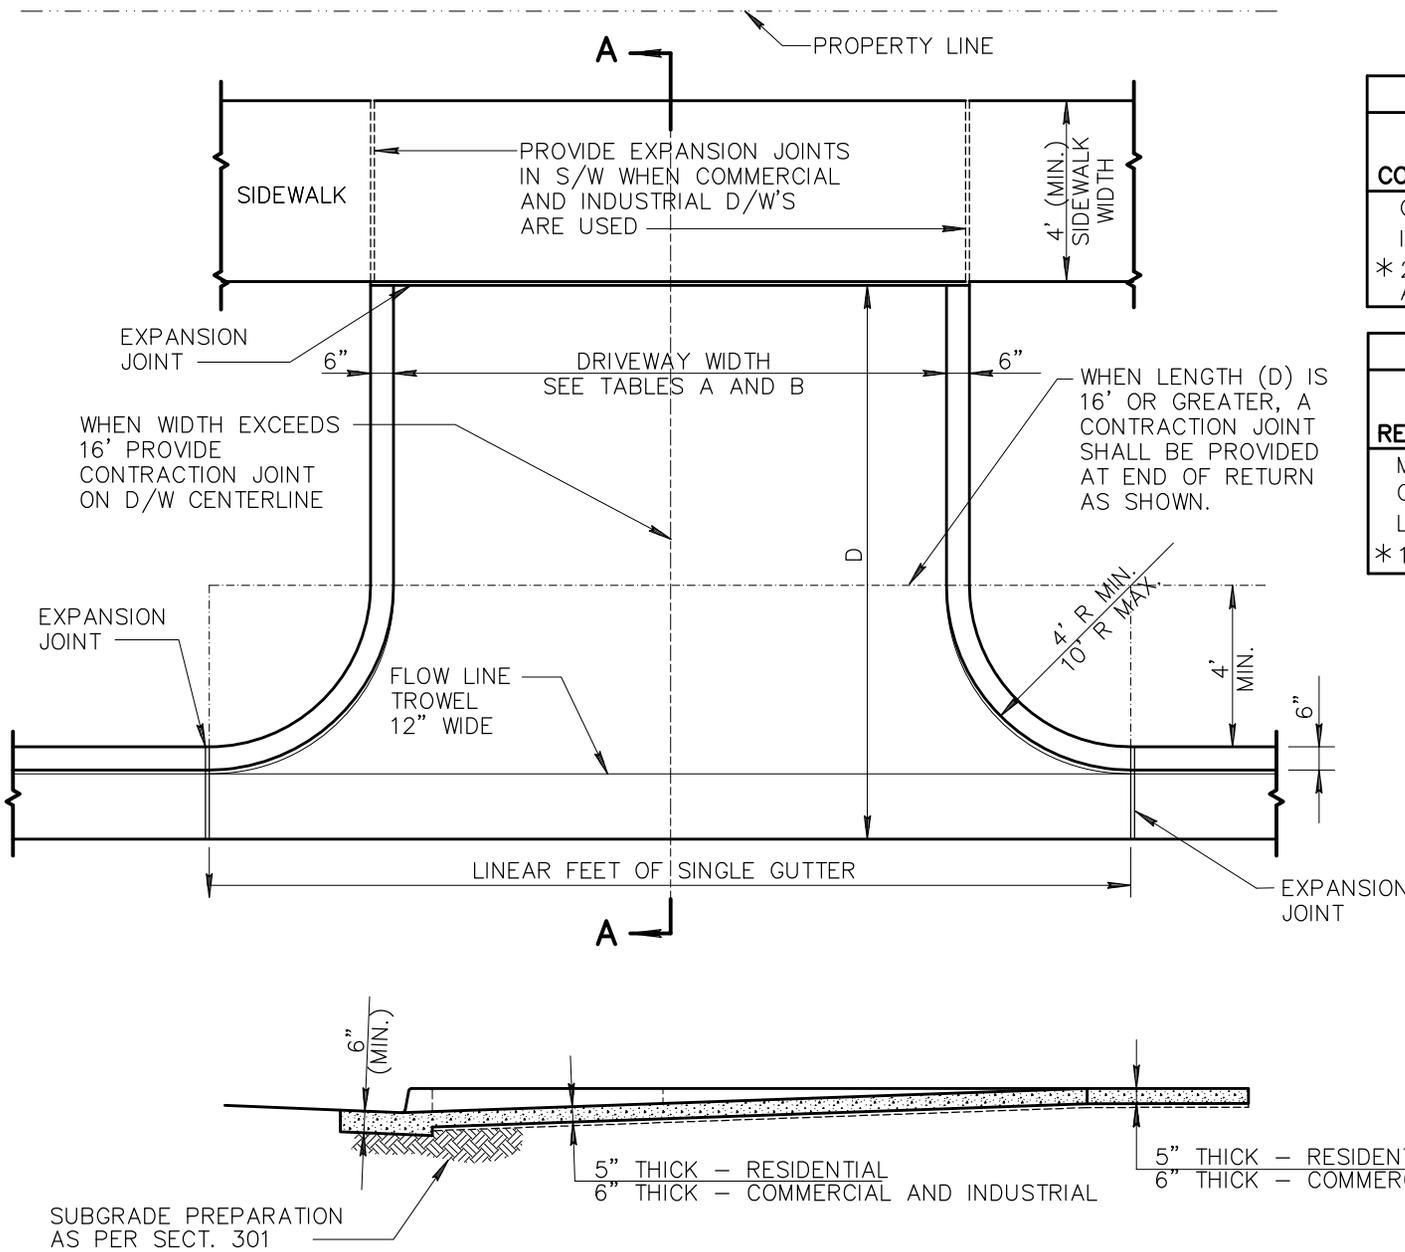

SECTION A-A

TABLE A		
ZONING	DRIVEWAY WIDTH	
	COMMERCIAL AND INDUSTRIAL	MIN.*
COMMERCIAL	16'	40'
INDUSTRIAL	16'	40'
* 24' WHERE 2-WAY TRAFFIC IS ANTICIPATED		

TABLE B		
ZONING	DRIVEWAY WIDTH	
	RESIDENTIAL	MIN.*
MAJOR STREET	16'	30'
COLLECTOR STREET	12'	30'
LOCAL STREET	12'	30'
* 16' WIDTH IS DESIRABLE		

NOTES:

1. EXPANSION JOINTS SHALL COMPLY TO SECTION 340.
2. THIS TYPE D/W TO BE USED ONLY UPON APPROVAL OF ENGINEER.
3. CLASS 'B' CONCRETE CONSTRUCTION AS PER SECT. 725

DETAIL NO.

251



STANDARD DETAIL
ENGLISH


RETURN TYPE DRIVEWAYS

REVISED


01-01-2003

DETAIL NO.

251

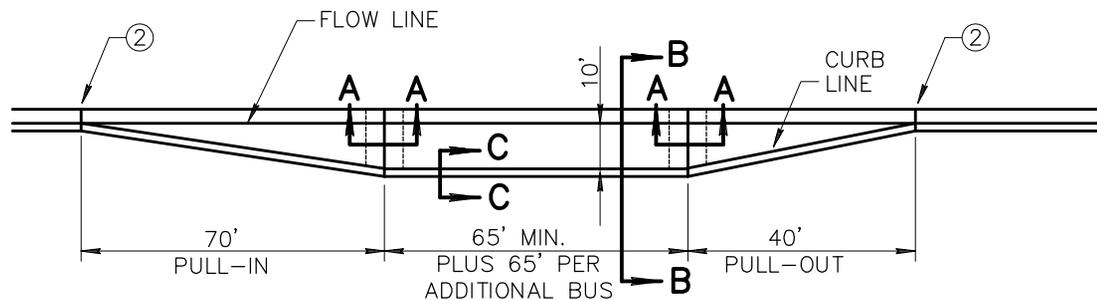


DETAIL

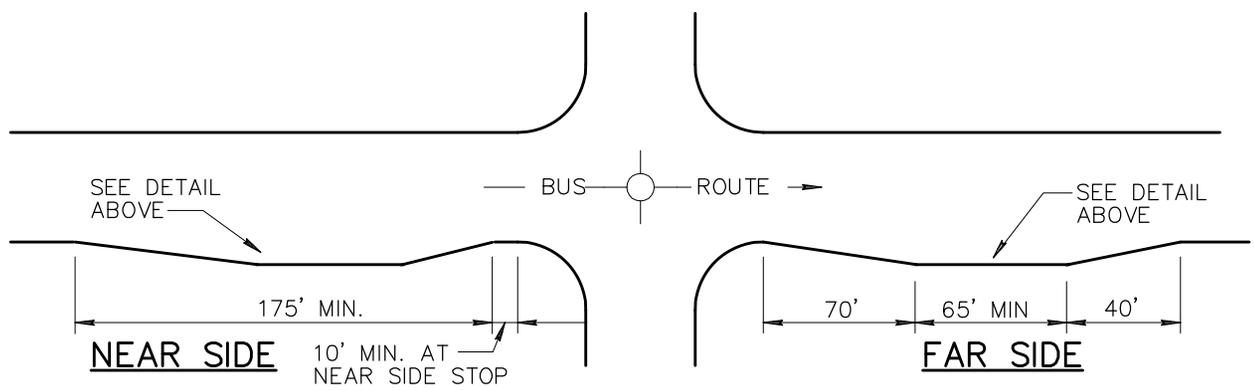


NEAR SIDE


FAR SIDE

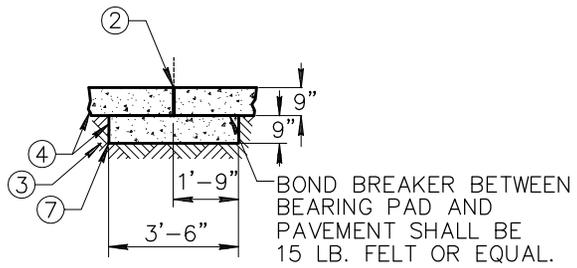

SECTION A-A

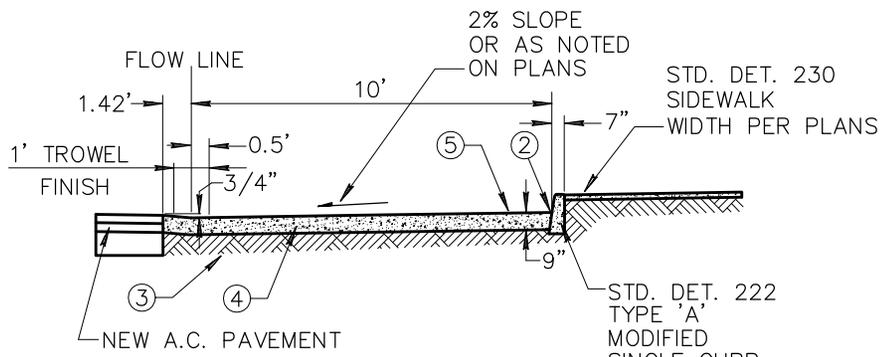

SECTION B-B

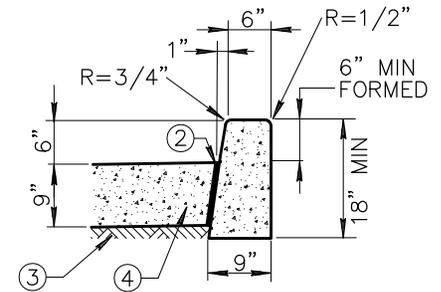

SECTION C-C

STD. DET. 222 TYPE 'A' MODIFIED SINGLE CURB

NOTES:

1. SUFFICIENT RIGHT-OF-WAY MUST BE AVAILABLE TO CONSTRUCT THE BUS BAY.
2. 1/2" BITUMINOUS PREFORMED EXPANSION JOINT FILLER ASTM D-1751 PER SPECIFICATION SECTION 729.
3. SUBGRADE PREPARATION PER SPECIFICATION SECTION 301 COMPACTED TO 95% MINIMUM DENSITY.
4. CONCRETE SHALL BE CLASS 'A' PER SPECIFICATION SECTION 725.
5. CONCRETE BUS BAY PAVEMENT SHALL BE BROOM FINISHED, EXCEPT WHERE OTHERWISE NOTED.
6. CONTRACTION JOINTS IN THE BUS BAY PAVEMENT SHALL MATCH THOSE IN THE CURB, 15 FT. MAXIMUM SPACING.
7. CONCRETE BEARING PAD (SECTION A-A) TO BE POURED SEPARATELY FROM CONCRETE BUS BAY PAVEMENT.

DETAIL NO.

252



STANDARD DETAIL
ENGLISH


BUS BAYS

REVISED

01-01-2005


DETAIL NO.

252

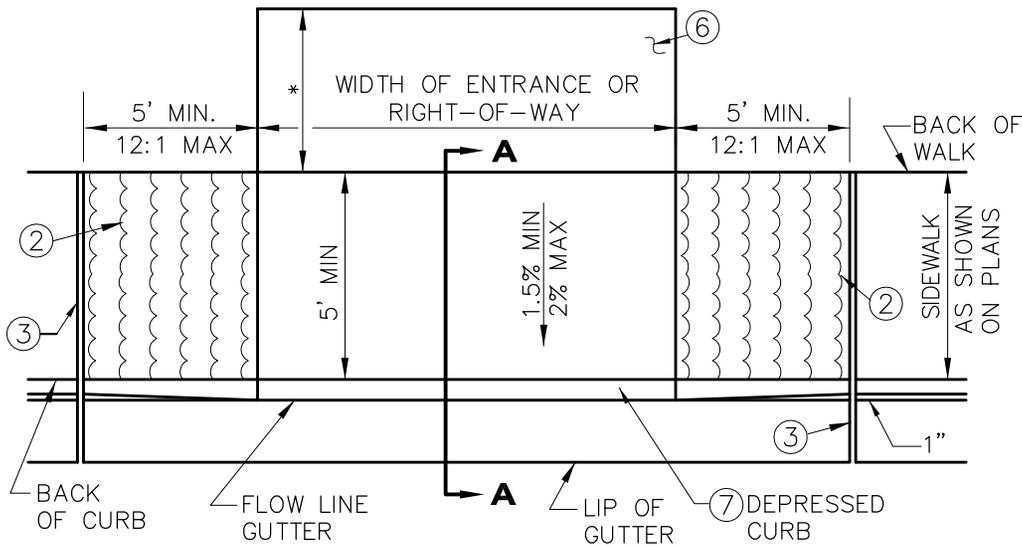


TYPE A - WITHOUT RETAINING CURB

* SEE PLANS FOR ALLEY SURFACING REQUIREMENTS

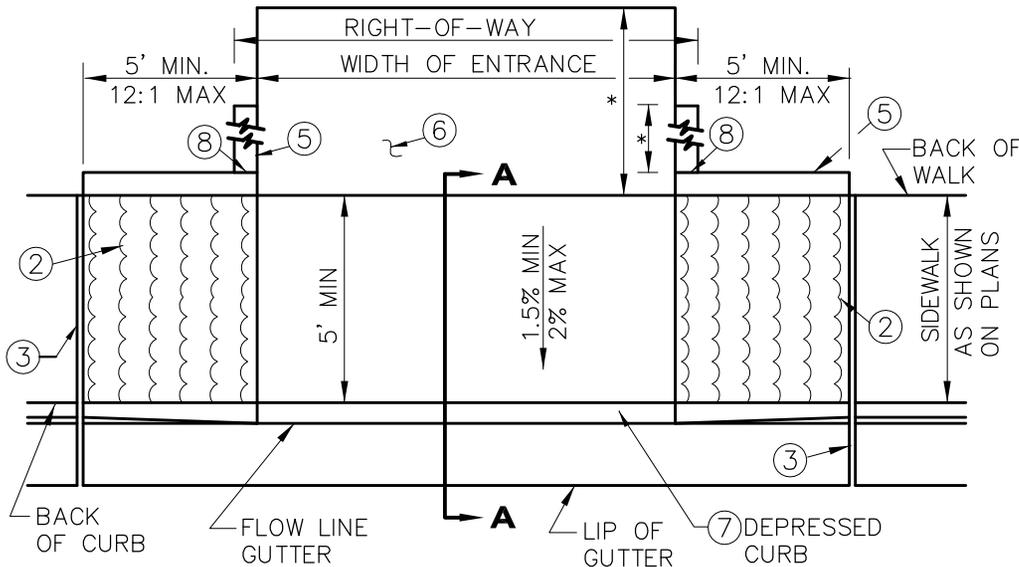

TYPE B - WITH RETAINING CURB

* SEE PLANS FOR RETAINING CURB LENGTHS, TOP OF CURB ELEVATIONS, AND ALLEY SURFACING REQUIREMENTS

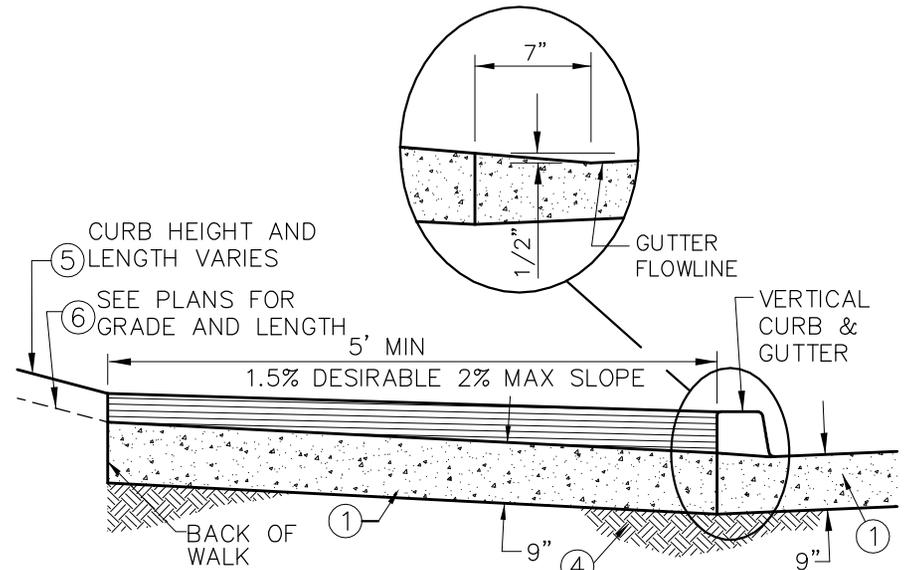

SECTION A-A



ELEVATION

NOTES:

- ①. CLASS "A" CONCRETE PER SECTION 725.
- ②. LIMITS OF HEAVY ROUGH BROOM FINISH.
- ③. EXPANSION JOINTS PER SECTION 340.
- ④. SUBGRADE PREPARATION PER SECTION 301.
- ⑤. SINGLE CURB PER DETAIL 222, TYPE "B".
- ⑥. ALLEY SURFACING PER PLANS.
- ⑦. DEPRESSED CURB SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE TYPE OF CURB USED AT THAT LOCATION.
- ⑧. CONTROL JOINT.

DETAIL NO.

260



STANDARD DETAIL
ENGLISH

**ALLEY ENTRANCE
(WITH VERTICAL CURB AND GUTTER)**

REVISED
01-01-2013

DETAIL NO.

260

This Page Is Reserved for Future Use.

DETAIL NO.






STANDARD DETAIL
ENGLISH

REVISED

DETAIL NO.

THICKEN CONCRETE FROM 6" TO 8" IN 18" AT BACK OF ALLEY ENTRANCE

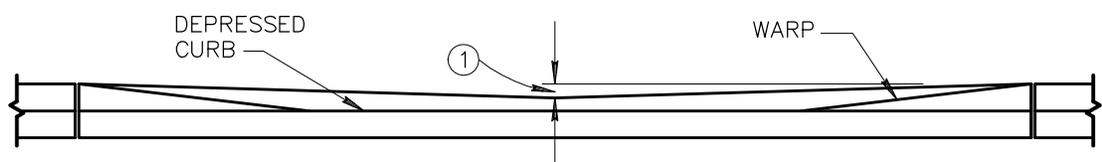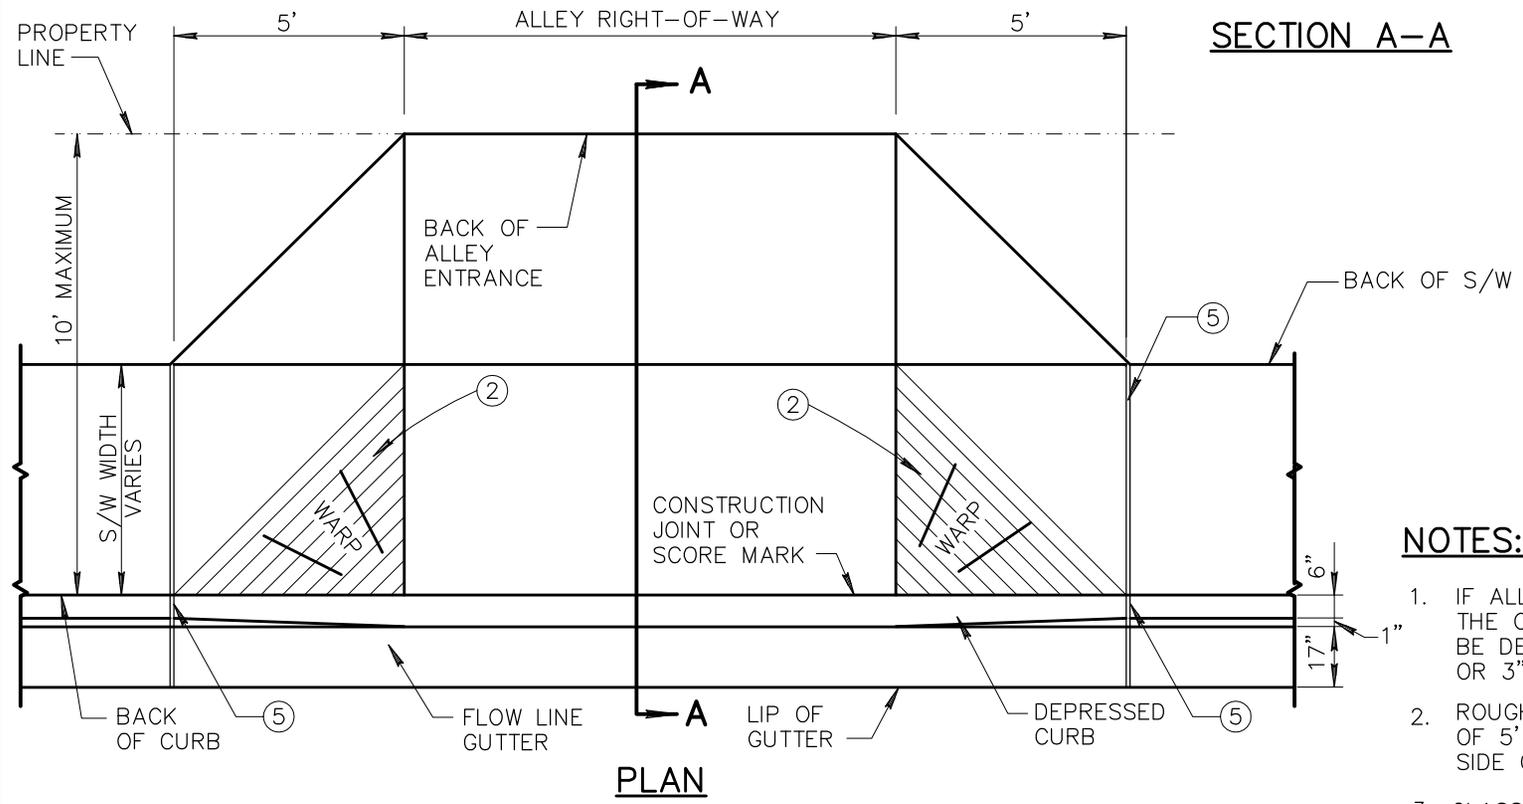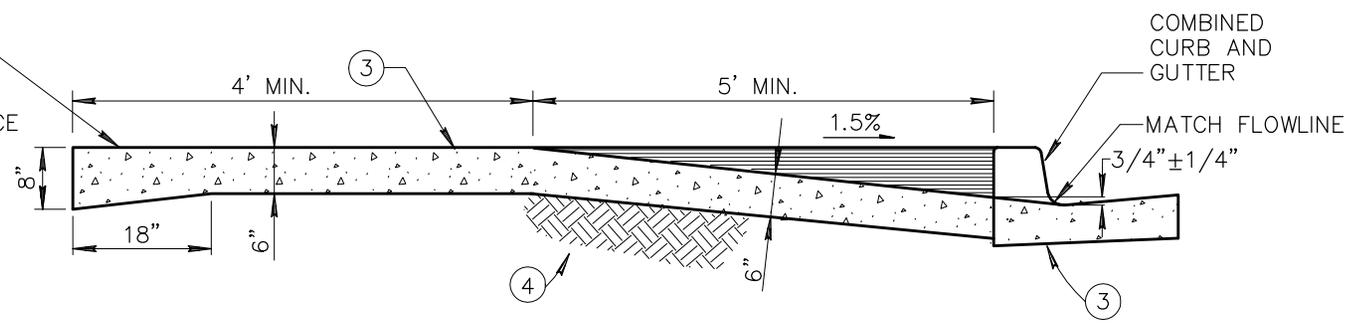


SECTION A-A

PLAN


ELEVATION

NOTES:

1. IF ALLEY ENTRANCE IS USED FOR DRAINAGE, THE CENTER BACK OF ALLEY ENTRANCE MAY BE DEPRESSED 2" FOR 4" CURB OR 3" FOR 6" CURB.
2. ROUGH BROOM FINISH FULL WIDTH OF 5' WARP SECTION, EACH SIDE OF ALLEY ENTRANCE.
3. CLASS 'B' CONCRETE CONSTRUCTION PER SECT. 725.
4. SUBGRADE PREPARATION, PER SECT. 301.
5. EXPANSION JOINTS SHALL CONFORM TO SECTION 340.

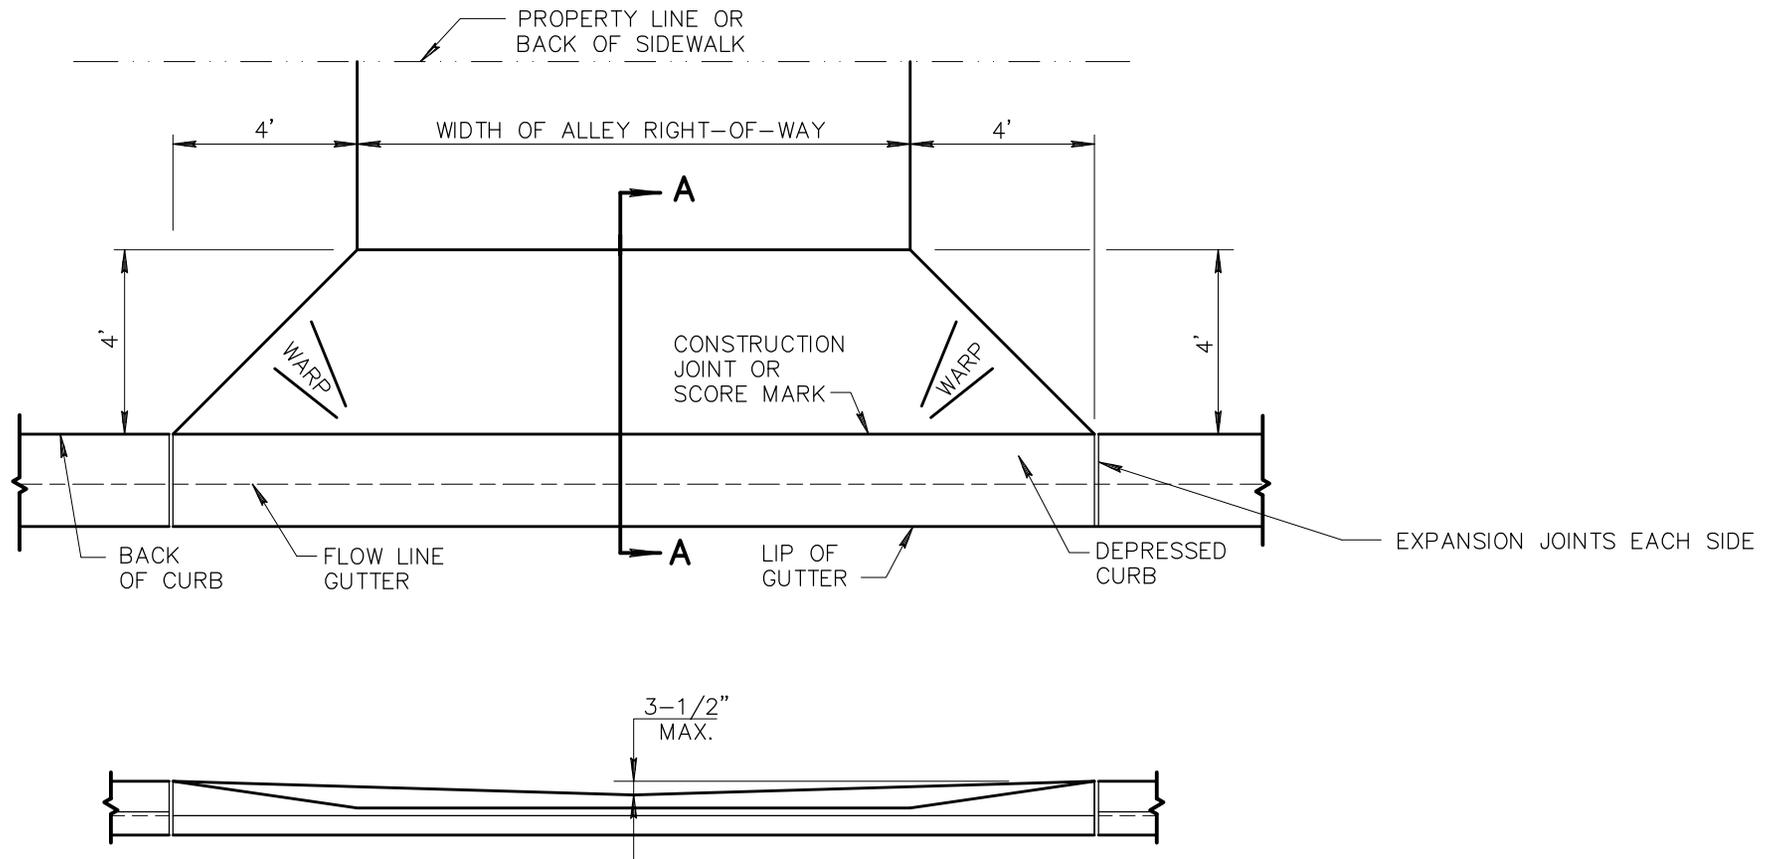

ELEVATION

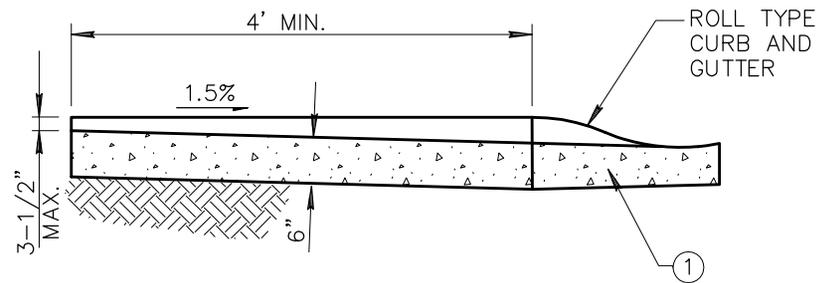

SECTION A-A

NOTES:

1. CLASS 'B' CONCRETE CONSTRUCTION PER SECT. 725.
2. EXPANSION JOINTS SHALL CONFORM TO SECT. 340.
3. SUBGRADE PREPARATION PER SECTION 301.

DETAIL NO.

263



STANDARD DETAIL
ENGLISH



**WING TYPE ALLEY ENTRANCE
(WITH ROLL TYPE CURB AND GUTTER)**

REVISED



01-01-2002

DETAIL NO.

263

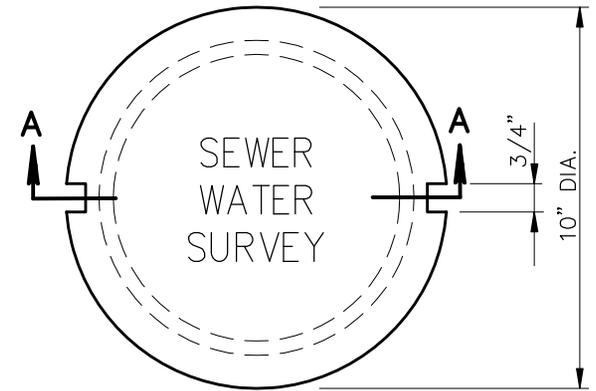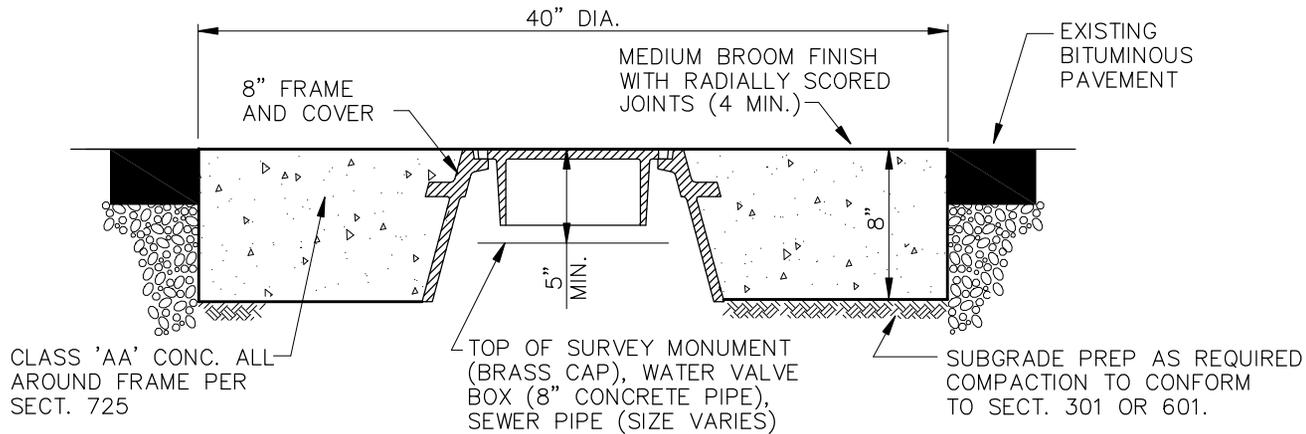

**CLEAN OUT FRAME & GRADE ADJUSTMENT
WATER VALVE, SURVEY MONUMENT, OR SEWER**

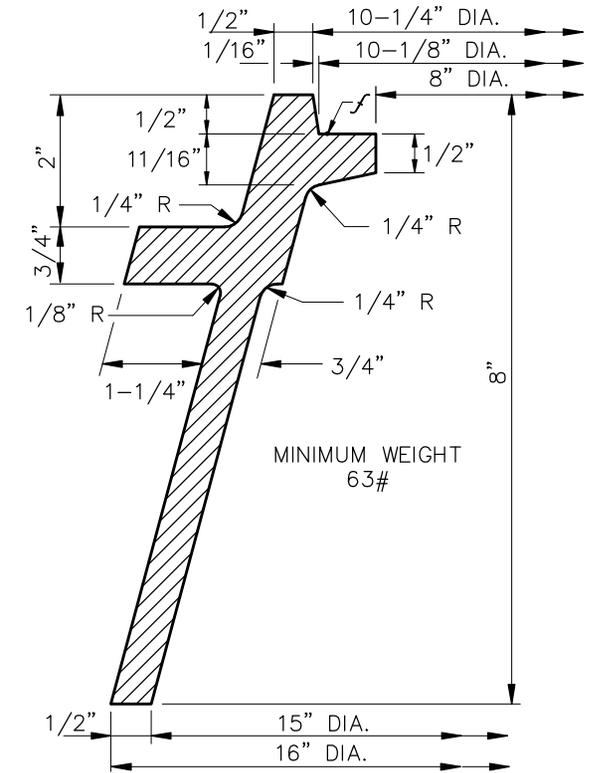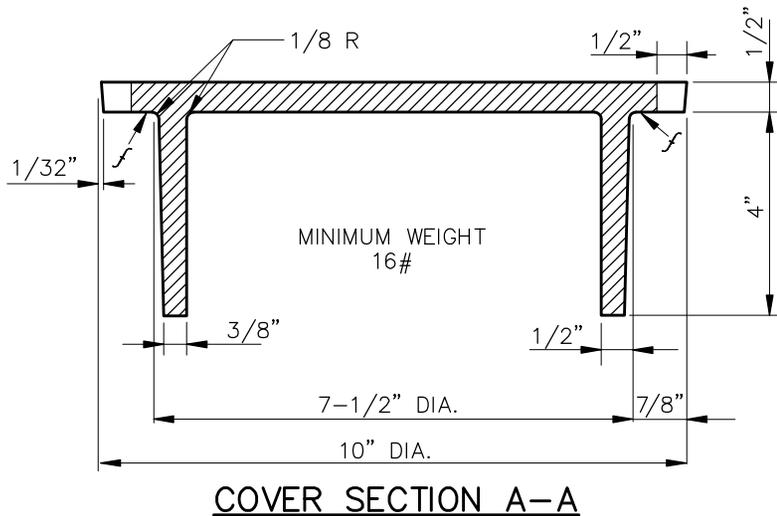

8" C.I. FRAME AND COVER

NOTES:

1. CASTING TO CONFORM TO SECT. 787.
2. LETTERS ON COVER TO BE AS FOLLOWS:
"SEWER", "WATER", OR "SURVEY" AS DIRECTED TOTAL WIDTH OF WORD "SEWER" OR "WATER" 3-3/4". TOTAL WIDTH OF WORD "SURVEY" 4-1/2". LETTER SIZE 5/8" x 3/4", RAISED 1/16" ABOVE LEVEL OF COVER, TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL.
3. \swarrow INDICATES MACHINE FINISHED SURFACE.

DETAIL NO.

270



STANDARD DETAIL
ENGLISH



FRAME AND COVER

REVISED




01-01-2014

DETAIL NO.

270

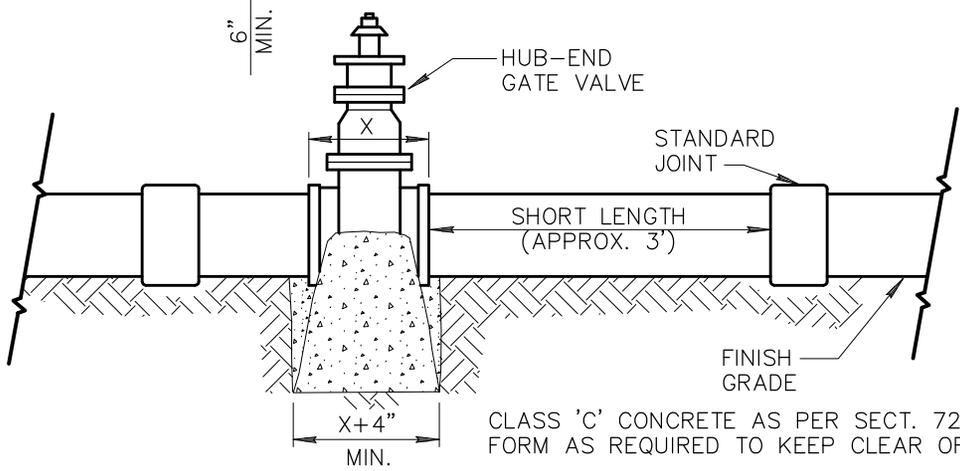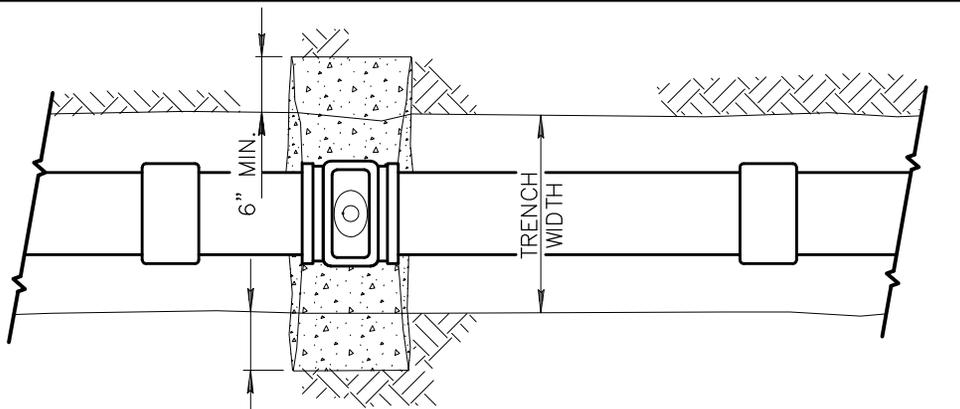


CLASS 'C' CONCRETE AS PER SECT. 725
FORM AS REQUIRED TO KEEP CLEAR OF JOINTS.

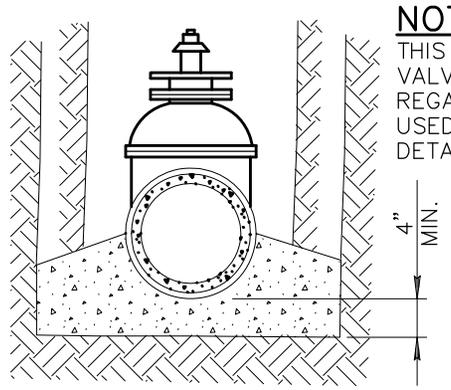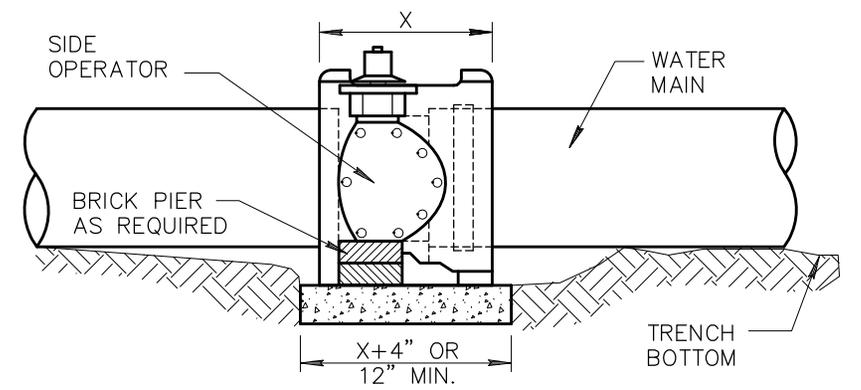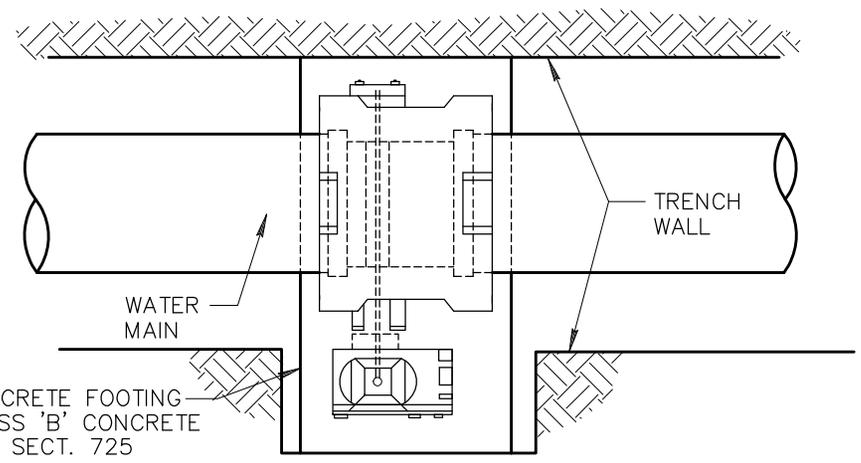

WATER GATE VALVE

NOTE:
THIS DETAIL COVERS WATER GATE VALVES, 4" TO 12" INCLUSIVE REGARDLESS OF TYPE OF PIPE USED. LARGER LINES TO BE DETAILED ON PLANS.

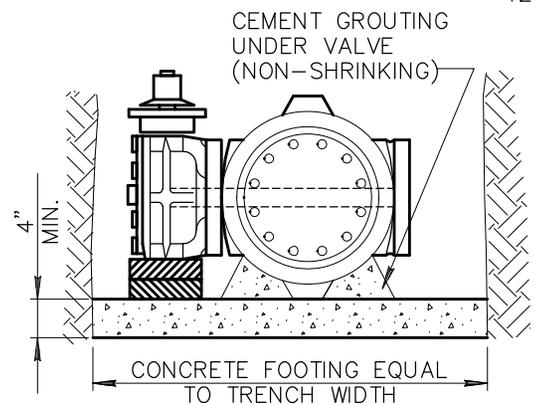

BUTTERFLY VALVE

NOTES:

1. THIS DETAIL COVERS BUTTERFLY VALVE INSTALLATION, 3" TO 12" INCLUSIVE, REGARDLESS OF TYPE OF PIPE OR JOINT USED. LARGER LINES TO BE DETAILED ON PLANS.
2. VALVE BOX AND COVER REQUIRED PER DETAILS 270 AND 391.

DETAIL NO.
301




STANDARD DETAIL
ENGLISH

**BLOCKING FOR
WATER GATE AND BUTTERFLY VALVES**

REVISED
01-01-1998

DETAIL NO.
301

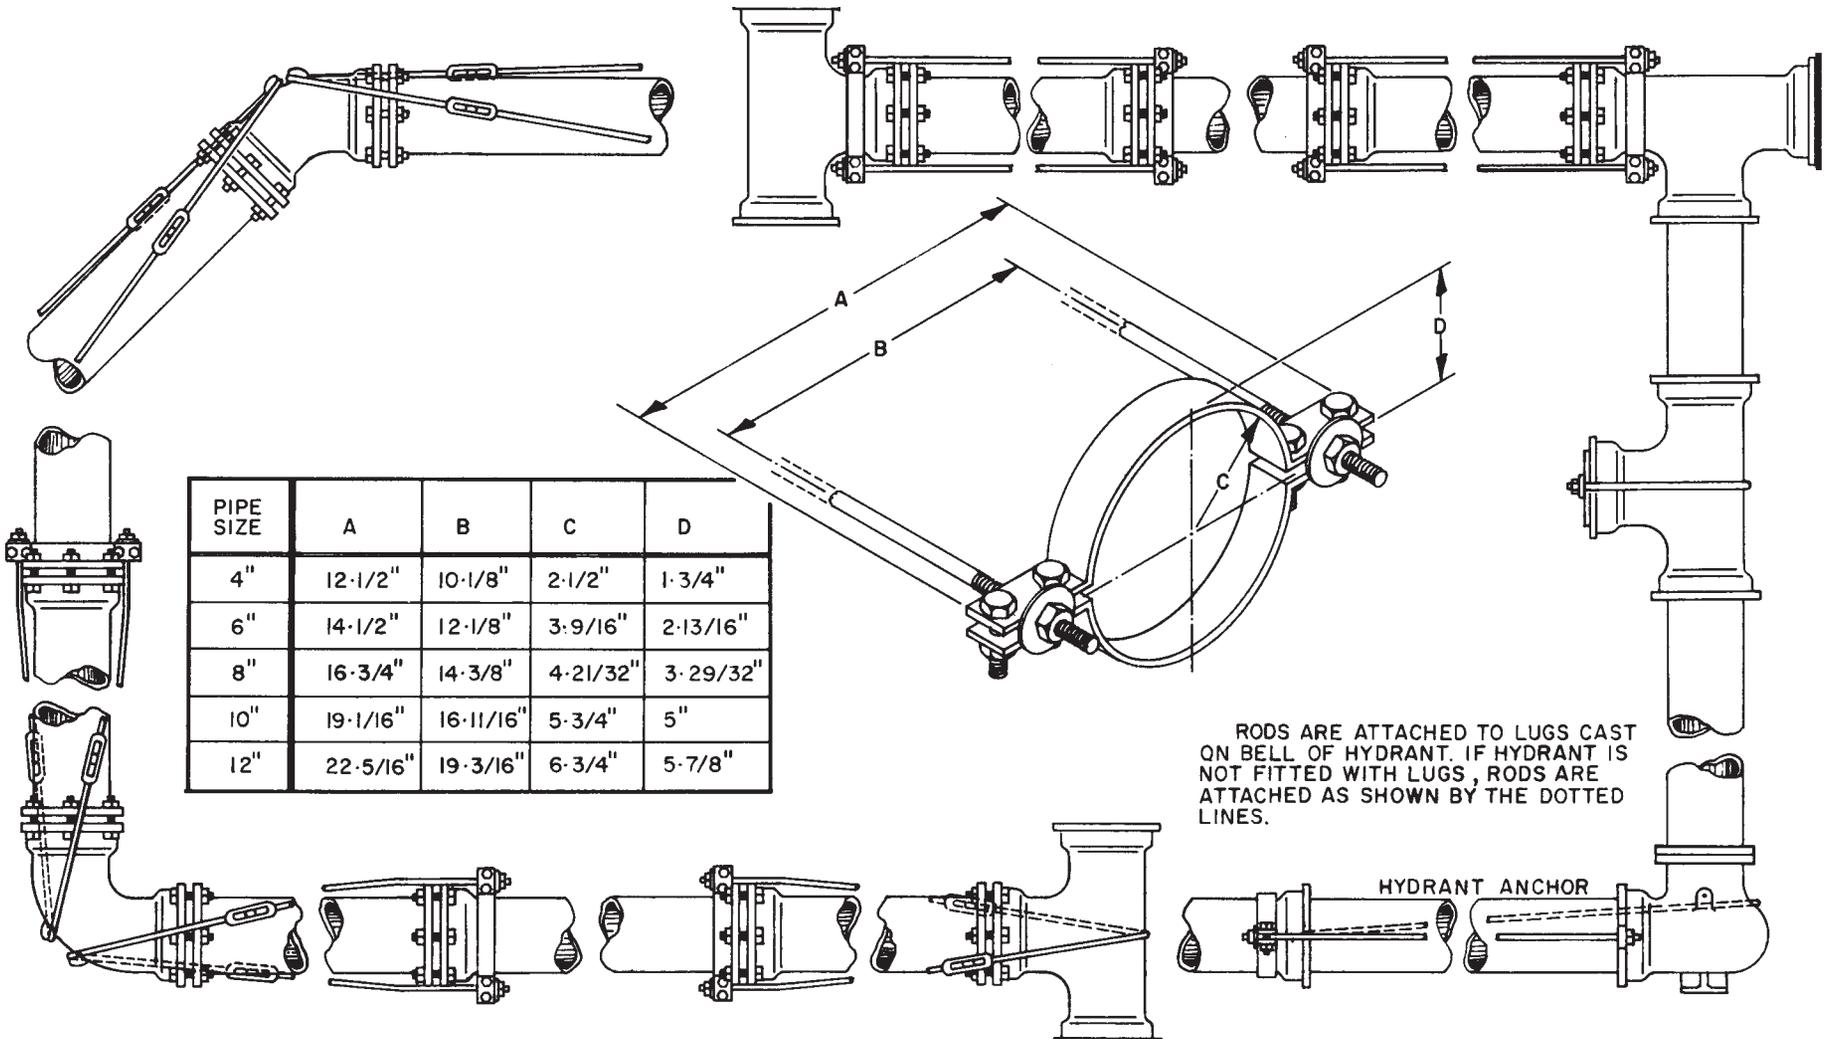

PIPE SIZE	A	B	C	D
4"	12-1/2"	10-1/8"	2-1/2"	1-3/4"
6"	14-1/2"	12-1/8"	3-9/16"	2-13/16"
8"	16-3/4"	14-3/8"	4-21/32"	3-29/32"
10"	19-1/16"	16-11/16"	5-3/4"	5"
12"	22-5/16"	19-3/16"	6-3/4"	5-7/8"

RODS ARE ATTACHED TO LUGS CAST ON BELL OF HYDRANT. IF HYDRANT IS NOT FITTED WITH LUGS, RODS ARE ATTACHED AS SHOWN BY THE DOTTED LINES.

HYDRANT ANCHOR

THIS DETAIL IS FOR USE ONLY ON UNDERGROUND INSTALLATIONS WHERE THE USE OF CONCRETE THRUST BLOCKING PER DETAIL 380 CANNOT BE USED BECAUSE OF OBSTRUCTIONS, OR REQUIREMENTS OF THE SPECIFICATIONS...

- * CLAMPS SHALL BE 1/2 BY 2 INCHES FOR PIPE 4 AND 6 INCHES IN DIAMETER; 5/8 BY 2-1/2 INCHES FOR PIPE 8 AND 10 INCHES; 5/8 BY 3 INCHES FOR PIPE 12 INCHES. BOLT HOLES SHALL BE 1/16 INCH IN DIAMETER LARGER THAN BOLTS.
- * RODS SHALL BE 3/4 INCHES IN DIAMETER FOR PIPES 4,6 AND 8 INCHES IN DIAMETER; 7/8 INCHES FOR PIPE 10 INCHES AND 1 INCH IN DIAMETER FOR PIPE 12 INCHES.
- * BOLTS SHALL BE 5/8 INCHES IN DIAMETER FOR PIPE 4, 6 AND 8 INCHES IN DIAMETER; 3/4 INCHES FOR PIPE 10 INCHES AND 7/8 INCHES IN DIAMETER FOR PIPE 12 INCHES
- * WASHERS MAY BE CAST IRON OR STEEL, ROUND OR SQUARE, DIMENSIONS FOR CAST IRON WASHERS ARE 5/8 BY 3 INCHES FOR PIPE 4, 6, 8 AND 10 INCHES IN DIAMETER AND 3/4 BY 3-1/2 INCHES FOR PIPE 12 INCHES. DIMENSIONS FOR STEEL WASHERS ARE 1/2 BY 3 INCHES FOR PIPE 4, 6, 8 AND 10 INCHES IN DIAMETER AND 1/2 BY 3-1/2 INCHES FOR PIPE 12 INCHES IN DIAMETER. HOLES SHALL BE 1/8 INCH LARGER THAN THE RODS.

FOR PIPE LARGER THAN 12 INCHES IN DIAMETER, RESTRAINT DETAILS SHALL BE SUBMITTED FOR APPROVAL PRIOR TO INSTALLATION.

1. ALL TIE RODS, ROD COUPLINGS, TURNBUCKLES, BOLTS AND NUTS FOR THESE JOINTS SHALL BE OF CARBON STEEL EQUIVALENT TO A.S.T.M. A-307, GRADE B, WITH CADMIUM PLATING IN ACCORDANCE WITH A.S.T.M. A-165. EXCEPT THAT THE MIN. THICKNESS OF THE PLATING SHALL BE .0002 OF AN INCH. CADMIUM PLATED BOLTS SHALL HAVE CLASS 2A THREADS AND THE NUTS, ROD COUPLINGS AND TURNBUCKLES SHALL HAVE 2B THREADS.
2. HIGH STRENGTH, HEAT TREATED CAST IRON TEE-HEAD BOLTS WITH HEXAGON NUTS, ALL IN ACCORDANCE WITH THE STRENGTH REQUIREMENTS OF A.W.W.A. C-111, MAY BE USED IN LIEU OF THE CADMIUM PLATED BOLTS AND NUTS.
3. THE SKETCHES IN THIS SERIES OF FIGURES SHOW ACCEPTABLE METHODS OF PROVIDING ANCHORAGE. THERE IS NO PARTICULAR SIGNIFICANCE TO BE ATTACHED TO WHETHER THE SKETCH SHOWS A BELL AND SPIGOT JOINT OR A STANDARD MECHANICAL JOINT. THE ANCHORING PROCEDURE ILLUSTRATED APPLIES IN MOST CASES TO EITHER TYPE OF JOINT. IN SOME CASES, DIMENSIONS OF THE PARTICULAR PIPE OR HUB AND SPACE AVAILABLE FOR WORKING AROUND THE PARTICULAR JOINT WILL INFLUENCE THE CHOICE OF METHODS USED.
4. IN CERTAIN ASSEMBLIES OF RODS AND CLAMPS SHOWN, RODS RUN FROM A LUG ON THE FITTING (OR A CLAMP BEHIND THE HUB OF A BELL) TO A CLAMP AGAINST A FACE OF A BELL. NOTE THAT THIS ARRANGEMENT ANCHORS ONLY ONE JOINT. THE STABILITY OF THE JOINT WHERE THE CLAMP IS AGAINST THE FACE OF THE BELL DEPENDS ON HAVING SOIL ABOVE A RELATIVELY LONG PIECE OF PIPE ON BOTH SIDES OF THE JOINT. CONSEQUENTLY, IF THE DISTANCE BETWEEN THE FIRST AND SECOND JOINTS IS LESS THAN 12 FEET, THE SECOND JOINT SHOWN SHALL BE ANCHORED BY A CLAMP BEHIND THE HUB OF THE BELL AND RODS TO A CLAMP AT THE FACE OF THE NEXT BELL.
5. COATING TYPE: A.H.D. ASPHALTIC PRIMER 719(A). - ALL EXPOSED METAL.

SHEET 2 OF 2

DETAIL NO.

302-2



STANDARD DETAIL
ENGLISH


JOINT RESTRAINT WITH TIE RODS

REVISED


01-01-1998

DETAIL NO.

302-2

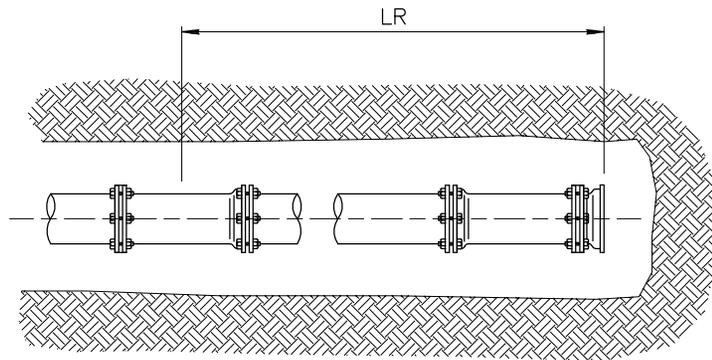


DEAD ENDS

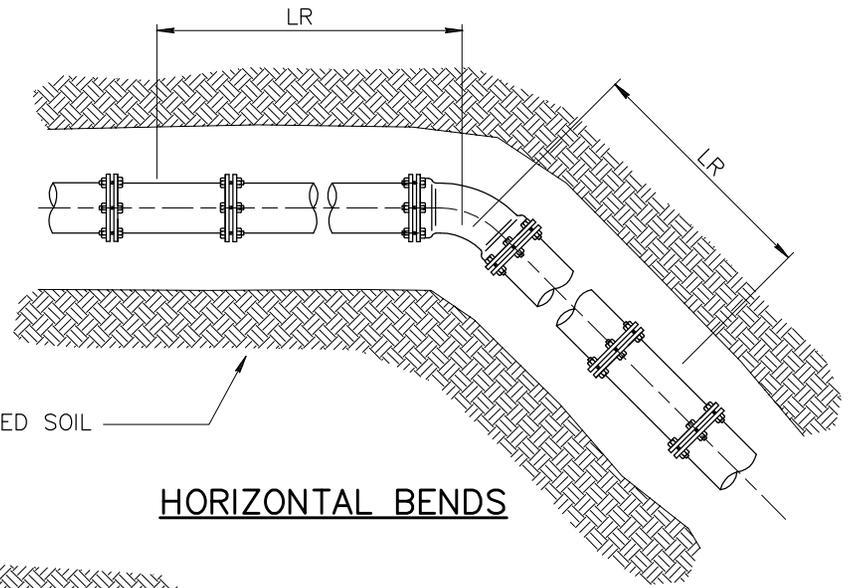


HORIZONTAL BENDS


LRN = SHORTEST LENGTH OF PIPE RESTRAINED TO THE RUN OF THE TEE FITTING (BOTH SIDES OF TEE).

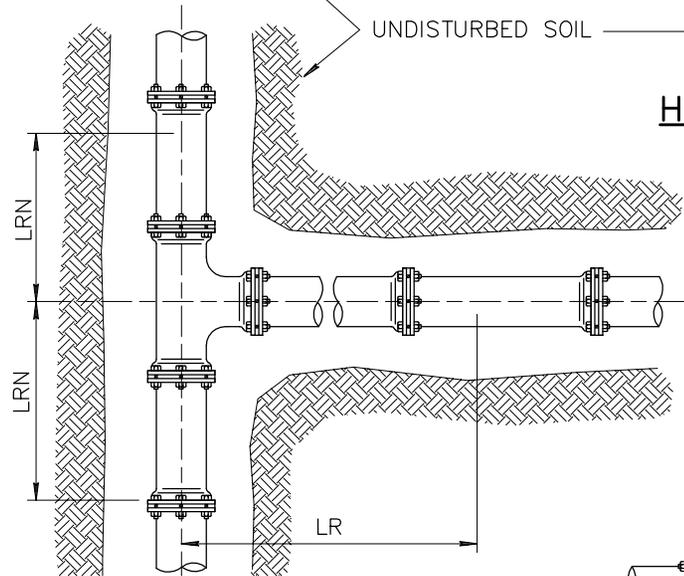

TEES

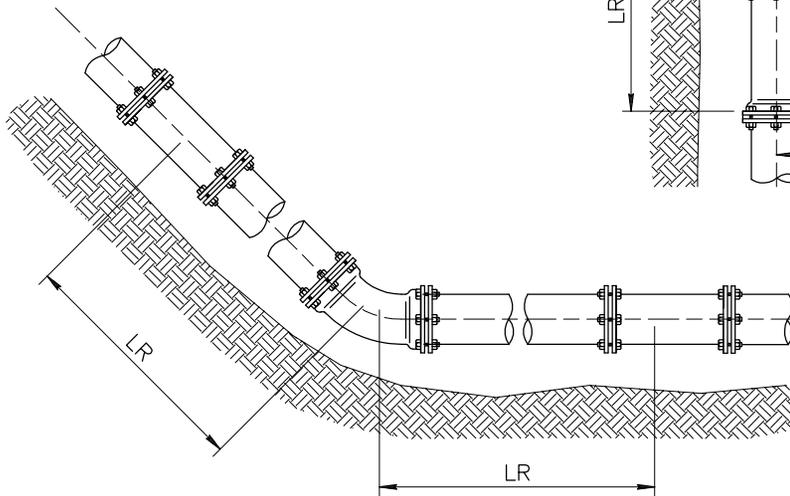

VERTICAL UP BEND

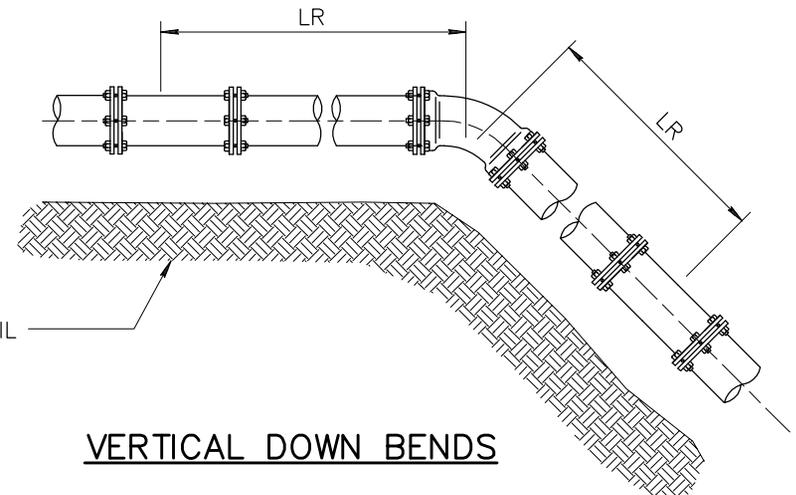

VERTICAL DOWN BENDS

RESTRAINED LENGTHS, LR, FOR DUCTILE IRON PIPE												
NOMINAL PIPE SIZE INCHES	HORIZONTAL BENDS			TEES		VERTICAL OFFSETS						DEAD ENDS
						90° BEND FITTINGS		45° BEND FITTINGS		22-1/2° BEND FITTINGS		
	90°	45°	22-1/2°	LRN=0'	LRN=10'	DOWN BEND	UP BEND	DOWN BEND	UP BEND	DOWN BEND	UP BEND	
4	18	7	4	30	8	31	18	13	7	6	3	31
6	25	10	5	43	20	44	25	18	10	9	5	44
8	32	13	6	56	34	58	32	24	13	11	6	58
10	38	16	8	68	45	69	38	29	16	14	8	69
12	45	19	9	80	57	81	45	34	19	16	9	81
14	51	21	10	91	68	92	51	38	21	18	10	92
16	57	24	11	103	79	104	57	43	24	21	11	104
18	62	26	12	113	90	115	62	48	26	23	12	115
20	68	28	14	125	100	126	68	52	28	25	14	126
24	79	33	16	145	121	147	79	61	33	29	16	147

RESTRAINED LENGTHS, LR, FOR DUCTILE IRON PIPE WITH POLYETHYLENE WRAP												
NOMINAL PIPE SIZE INCHES	HORIZONTAL BENDS			TEES		VERTICAL OFFSETS						DEAD ENDS
						90° BEND FITTINGS		45° BEND FITTINGS		22-1/2° BEND FITTINGS		
	90°	45°	22-1/2°	LRN=0'	LRN=10'	DOWN BEND	UP BEND	DOWN BEND	UP BEND	DOWN BEND	UP BEND	
4	26	11	5	69	18	72	26	30	11	14	5	72
6	36	15	7	99	47	102	36	42	15	20	7	102
8	47	19	9	130	78	133	47	55	19	26	9	133
10	56	23	11	157	103	159	56	66	23	32	11	159
12	65	27	13	185	131	187	65	77	27	37	13	187
14	74	31	15	211	156	214	74	89	31	42	15	214
16	82	34	16	238	183	241	82	100	34	48	16	241
18	90	37	18	263	207	266	90	110	38	53	18	266
20	98	41	20	289	233	292	98	121	41	58	20	292
24	113	47	22	337	280	340	113	141	47	68	22	340

NOTES:

1. ALL JOINTS WITHIN THE SPECIFIED LENGTH LR MUST BE RESTRAINED.
ALL LENGTHS ARE GIVEN IN FEET.
2. THE MAXIMUM TEST PRESSURE SHALL NOT EXCEED 200 PSI
3. THE MINIMUM DEPTH OF BURY SHALL BE 3' TO TOP OF PIPE.
4. RESTRAINED LENGTHS MAY BE REDUCED WHEN SUPPORTED BY ENGINEERING CALCULATIONS.

DETAIL NO.

303-2



STANDARD DETAIL
ENGLISH


**JOINT RESTRAINT FOR DUCTILE IRON AND
POLYETHYLENE WRAPPED DUCTILE IRON WATER PIPES**

REVISED




01-01-1998

DETAIL NO.


303-2

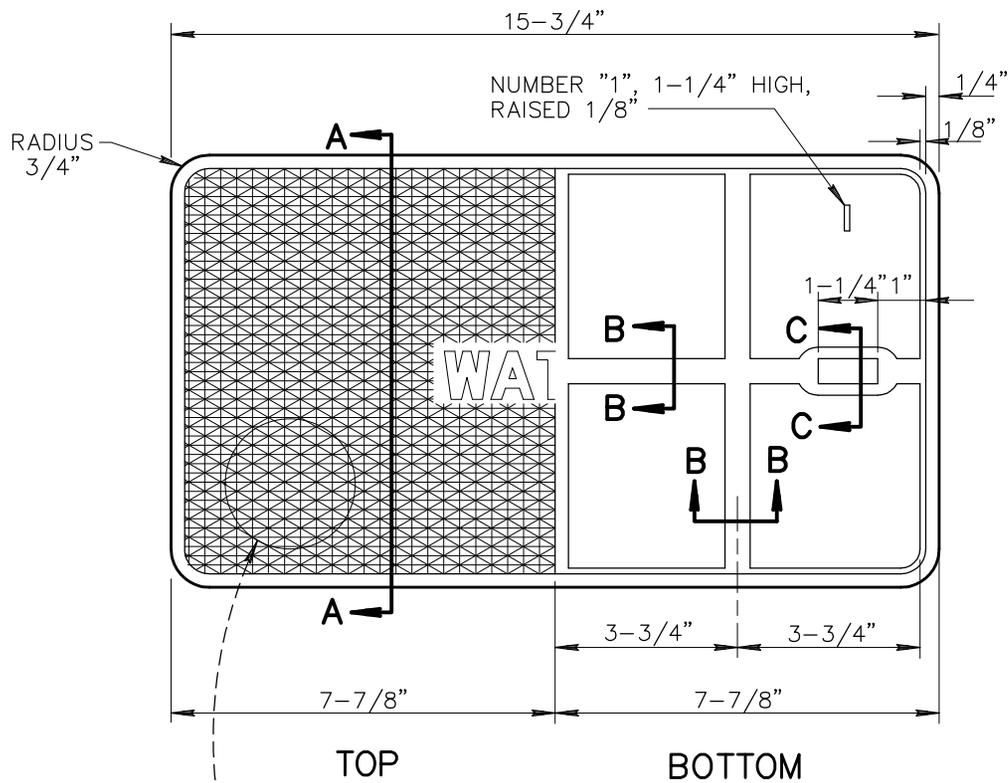

PLAN

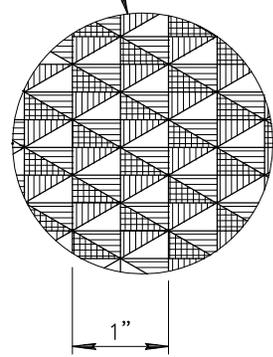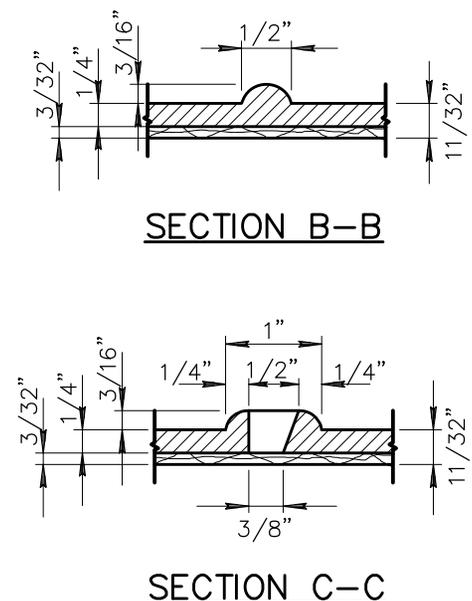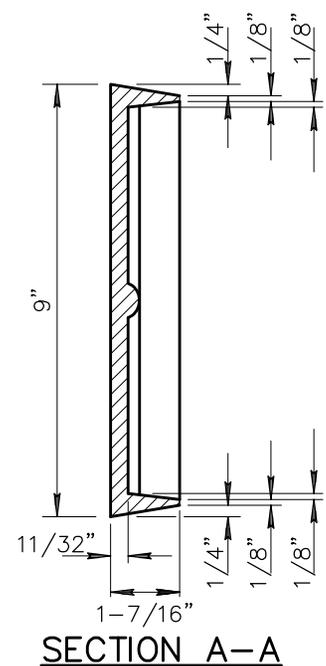

TOP OF COVER

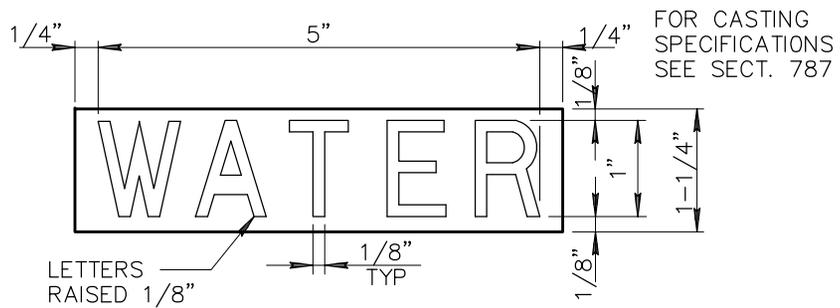

DETAIL NO.
310




STANDARD DETAIL
ENGLISH

**CAST IRON WATER METER BOX
COVER NO. 1**

REVISED
01-01-1998

DETAIL NO.
310

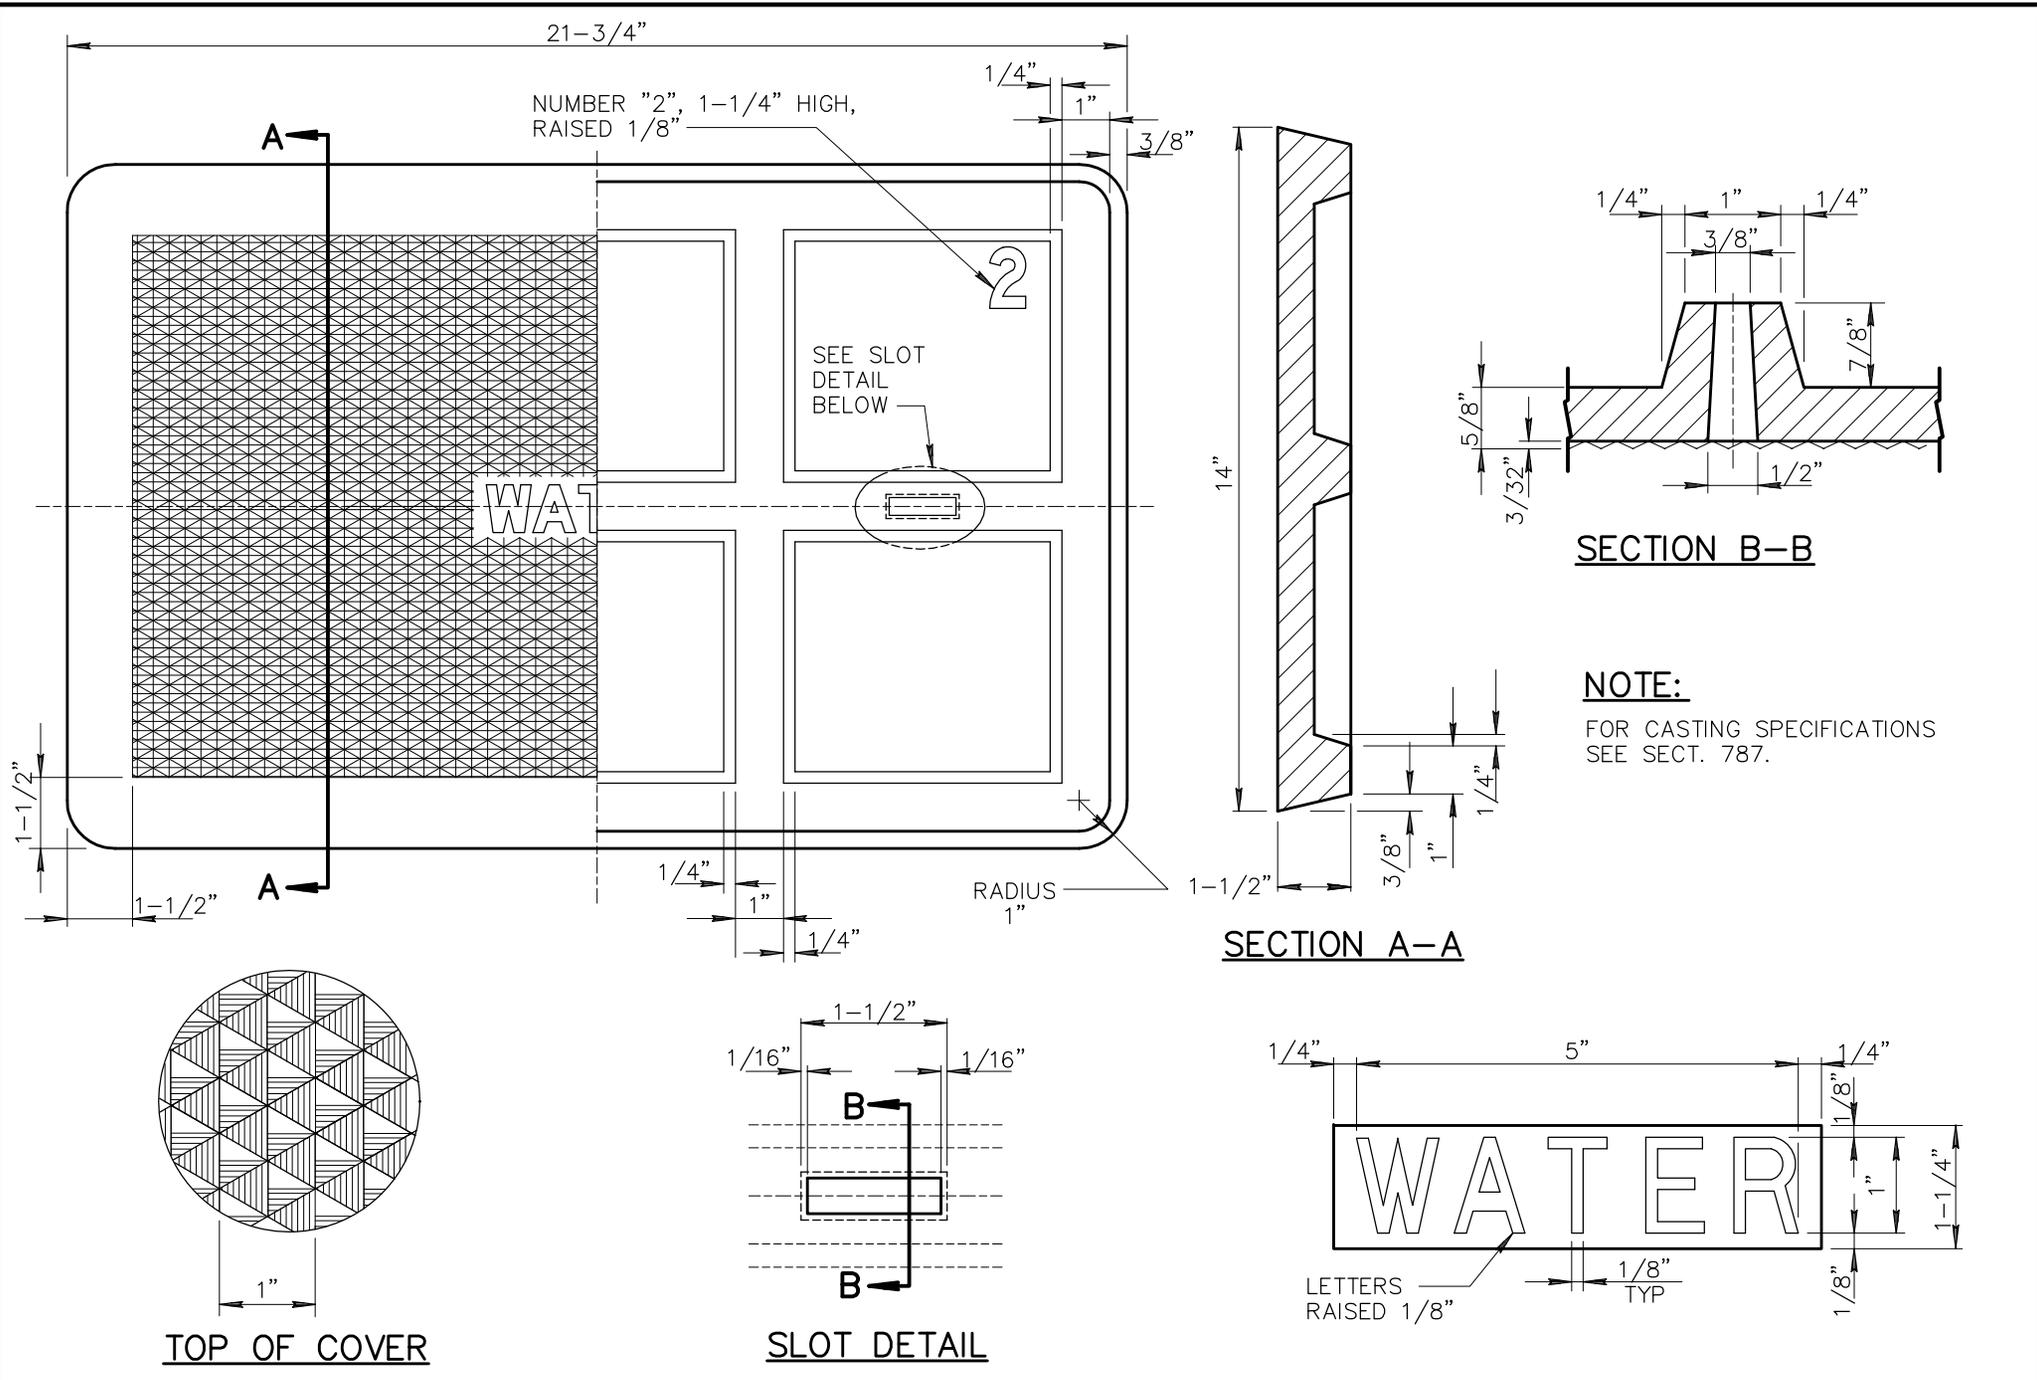

DETAIL NO.
311




STANDARD DETAIL
ENGLISH


**CAST IRON WATER METER BOX
COVER NO. 2**

REVISED
01-01-1998

DETAIL NO.
311

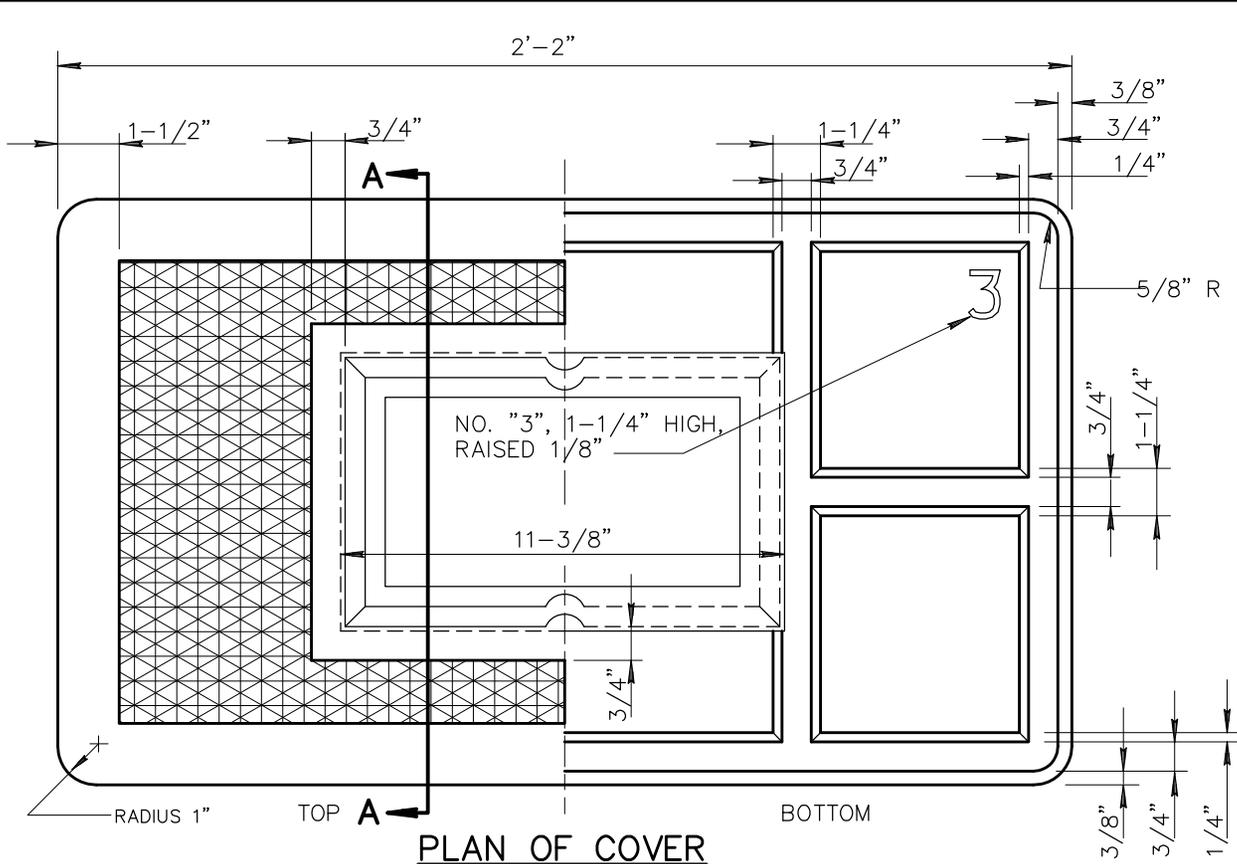


PLAN OF COVER

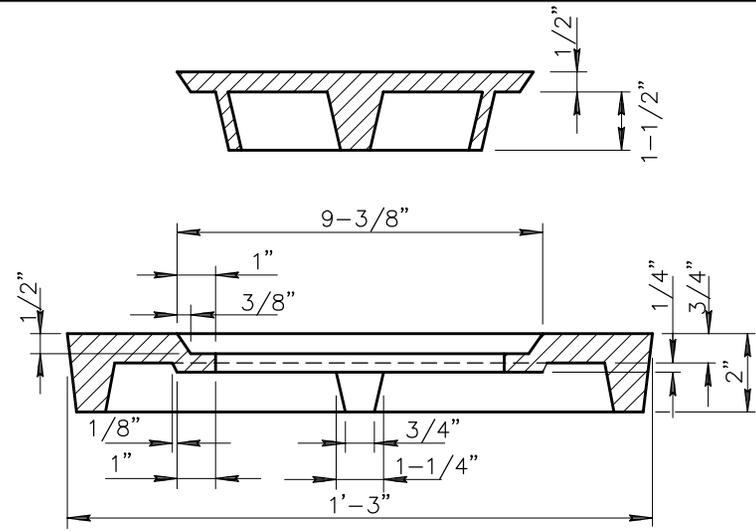


SECTION A-A

NOTES:


1. INSPECTION PLATE IS SAME AS USED WITH METER BOX COVER NO. 4.
2. FOR CASTING SPECIFICATIONS, SEE SECTION 787.
3. THE BEARING EDGES OF THESE CASTINGS SHALL BE MACHINED TO INSURE A FULL BEARING ON A FLAT SURFACE.



DETAIL

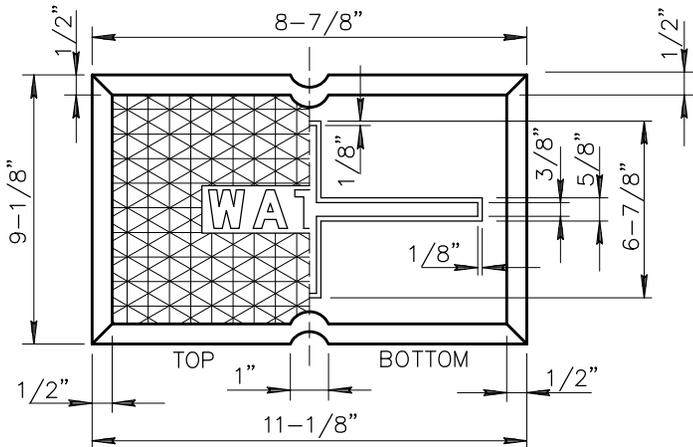


INSPECTION PLATE



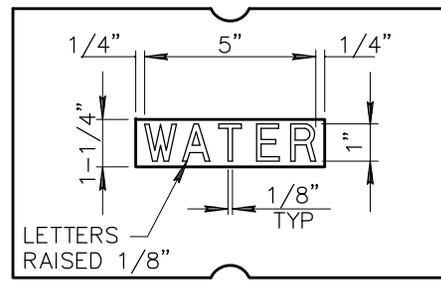


LETTERING DETAIL


TOP OF COVER & PLATE

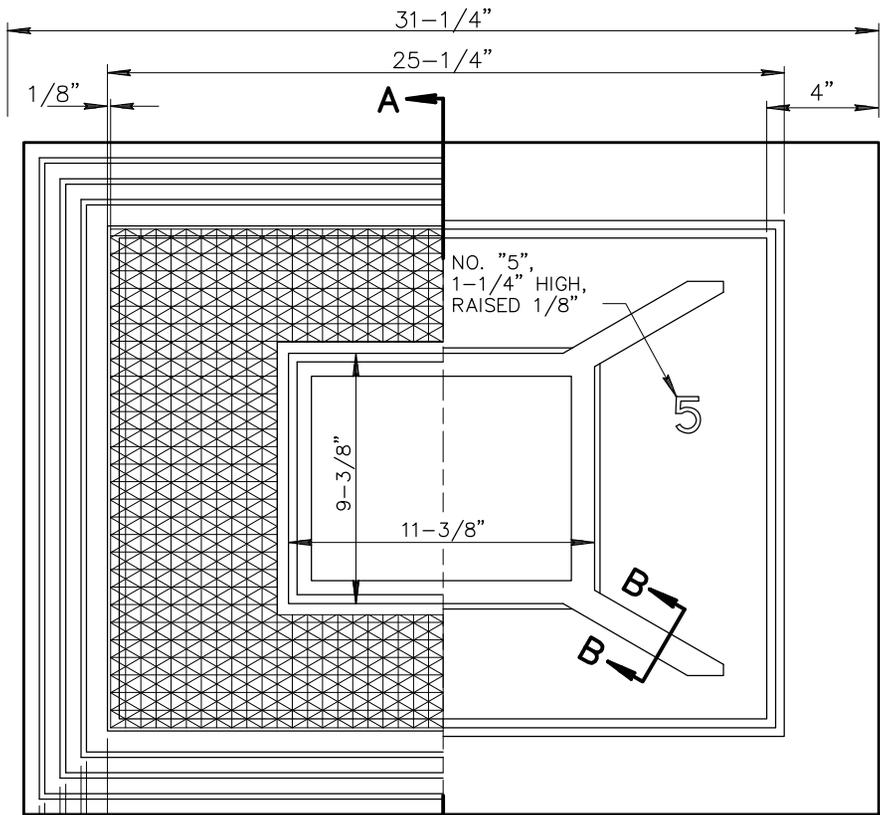


PLAN OF COVER




SECTION B-B

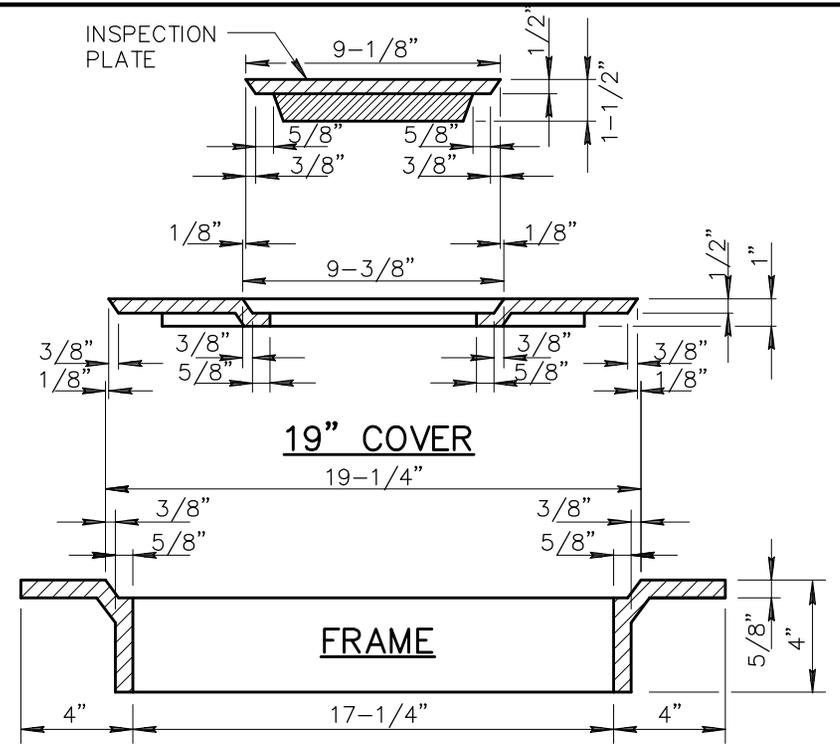


SECTION A-A

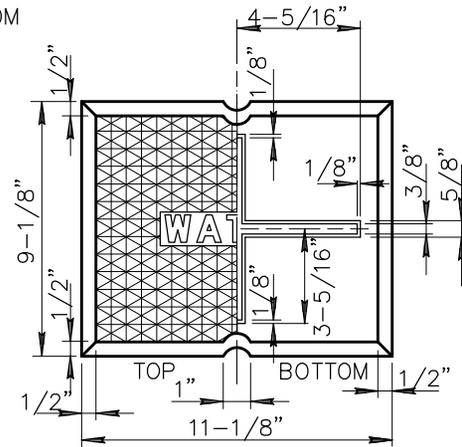

INSPECTION PLATE




DETAIL TOP OF COVER

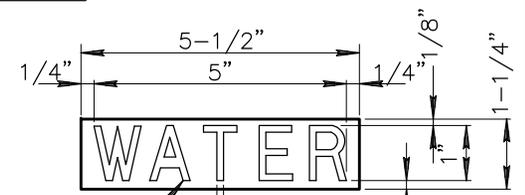


LETTERING DETAIL

NOTES:


1. FOR CASTING SPECIFICATIONS, SEE SECT. 787.
2. THE BEARING EDGES OF THESE CASTINGS SHALL BE MACHINED TO INSURE A FULL BEARING ON A FLAT SURFACE.

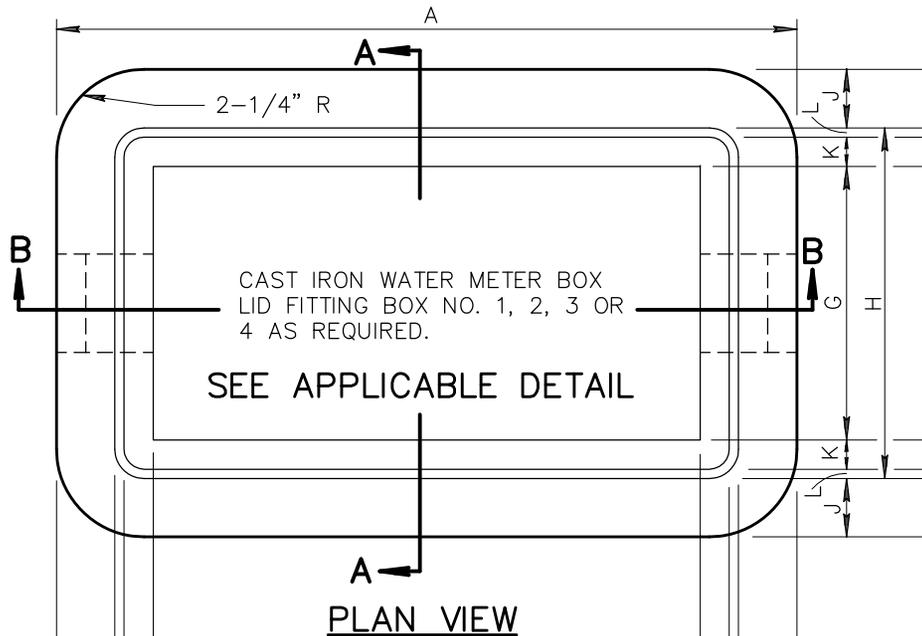

PLAN VIEW

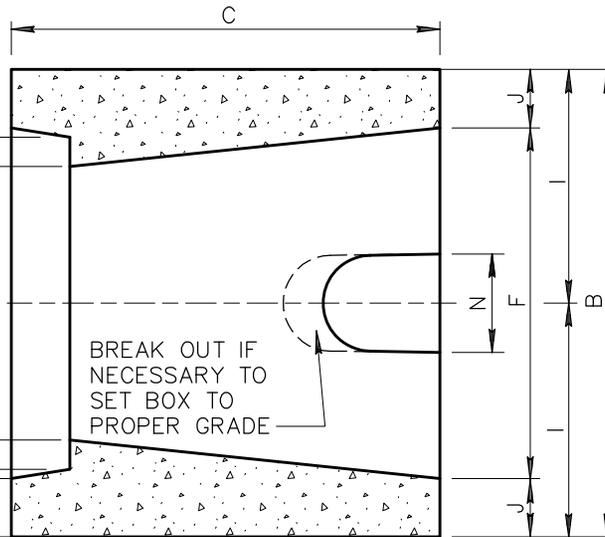

SECTION A-A

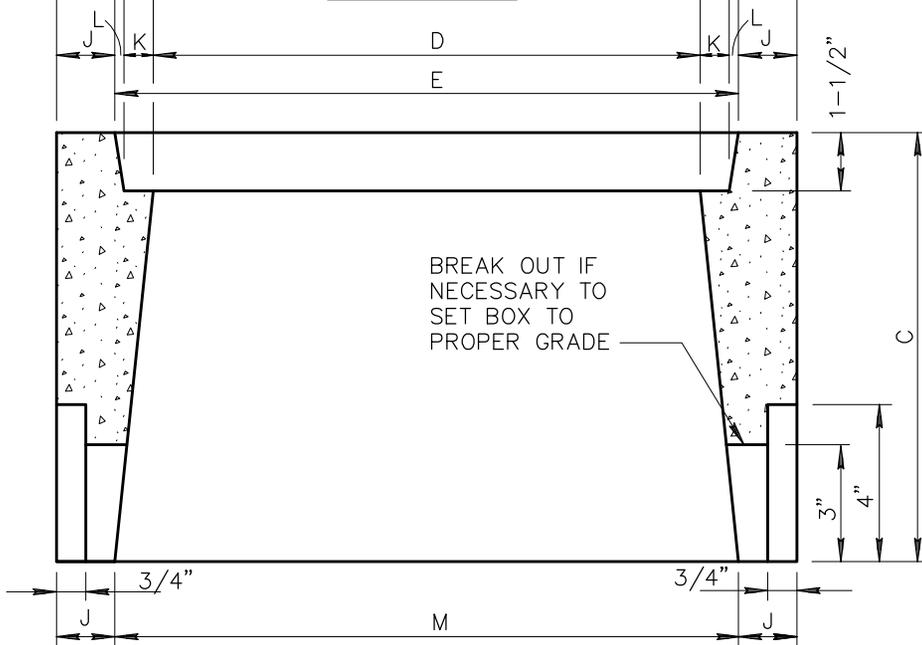

SECTION B-B

NOTES:

1. THE METER BOXES SHALL CONFORM TO THE DIMENSIONS AS SHOWN AND SHALL BE MADE OF PORTLAND CEMENT CONCRETE POURED AND TAMPED (OR VIBRATED) IN TRUE FORMS.
2. USE CLASS 'AA' CONCRETE PER SECT. 725.

METER BOX DIMENSIONS				
DIMS	BOX NUMBER			
	1	2	3	4
A	19"	24-1/2"	29-1/2"	33-1/2"
B	12"	16-3/4"	18-1/2"	22-3/4"
C	11"	12"	13"	12"
D	14"	19"	23-3/4"	27-3/4"
E	16"	22"	26-1/2"	30-1/2"
F	9"	13-1/4"	15"	19-3/4"
G	7"	11-1/4"	12-3/4"	17"
H	9"	14-1/4"	15-1/2"	19-3/4"
I	6"	8-3/8"	9-1/4"	11-3/8"
J	1-1/2"	1-3/4"	1-3/4"	1-1/2"
K	3/4"	1-1/8"	1"	1"
L	1/4"	3/8"	3/8"	3/8"
M	16"	21"	25-1/2"	30-1/2"
N	2-1/2"	3-1/2"	4"	4"
	5/8" OR 3/4" METER	1" METER	1-1/2" METER	2" METER

DETAIL NO.

320



STANDARD DETAIL
ENGLISH


CONCRETE WATER METER BOXES

REVISED

01-01-1998


DETAIL NO.

320

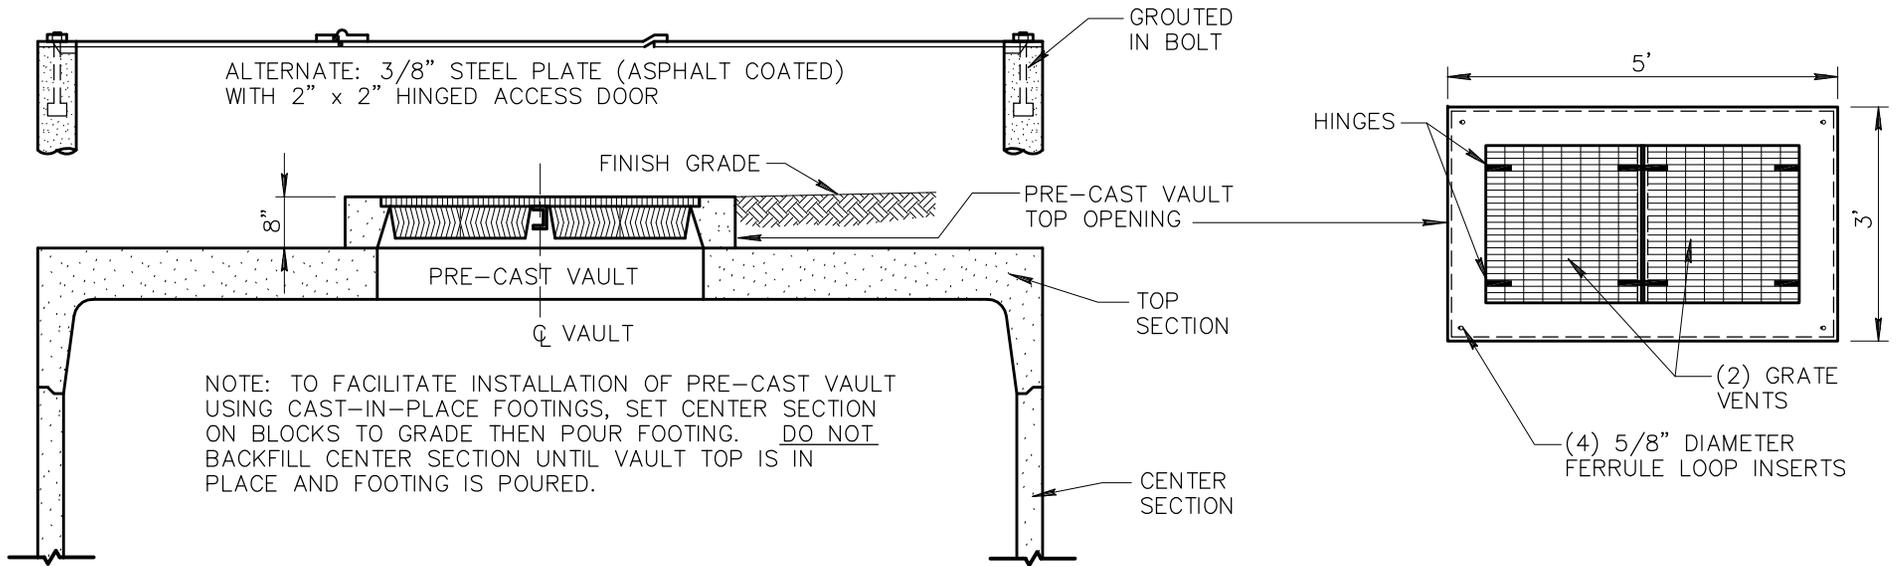



PRE-CAST VAULT SECTION

NOTE: PRECAST REINFORCED VAULT SECTIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND DETAILS AS APPROVED BY ENGINEER.

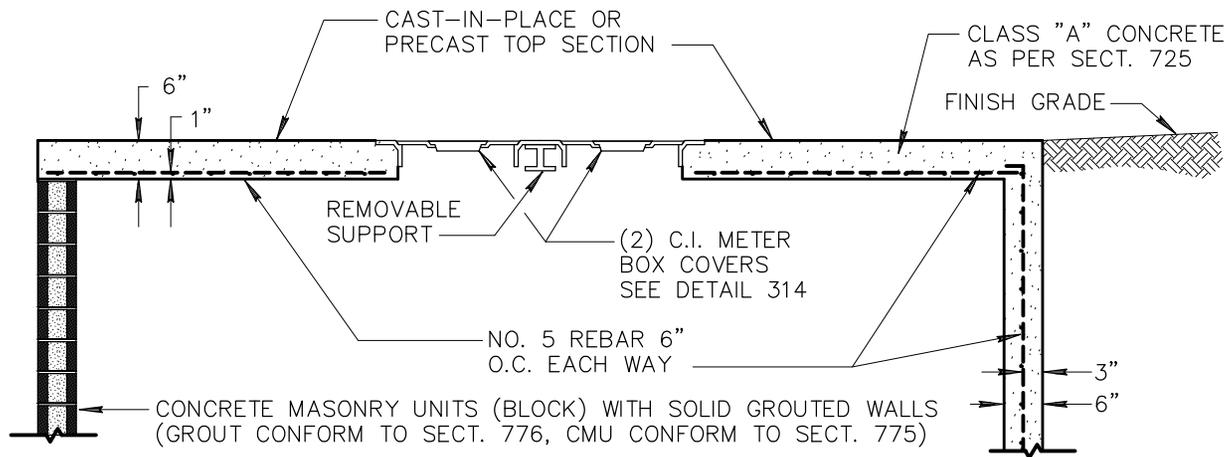

BLOCK MASONRY MAY BE USED IN LIEU OF CAST-IN-PLACE VAULT WALLS, NO. 4 REBAR IN EVERY OTHER CORE.

CAST-IN-PLACE VAULT SECTION

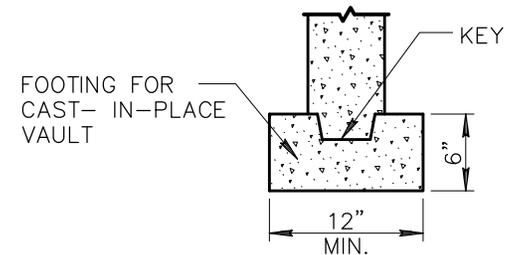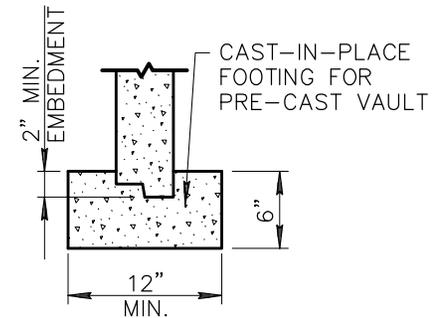

DETAIL NO.

321



STANDARD DETAIL
ENGLISH


STANDARD WATER METER VAULT

REVISED

01-01-1998


DETAIL NO.

321

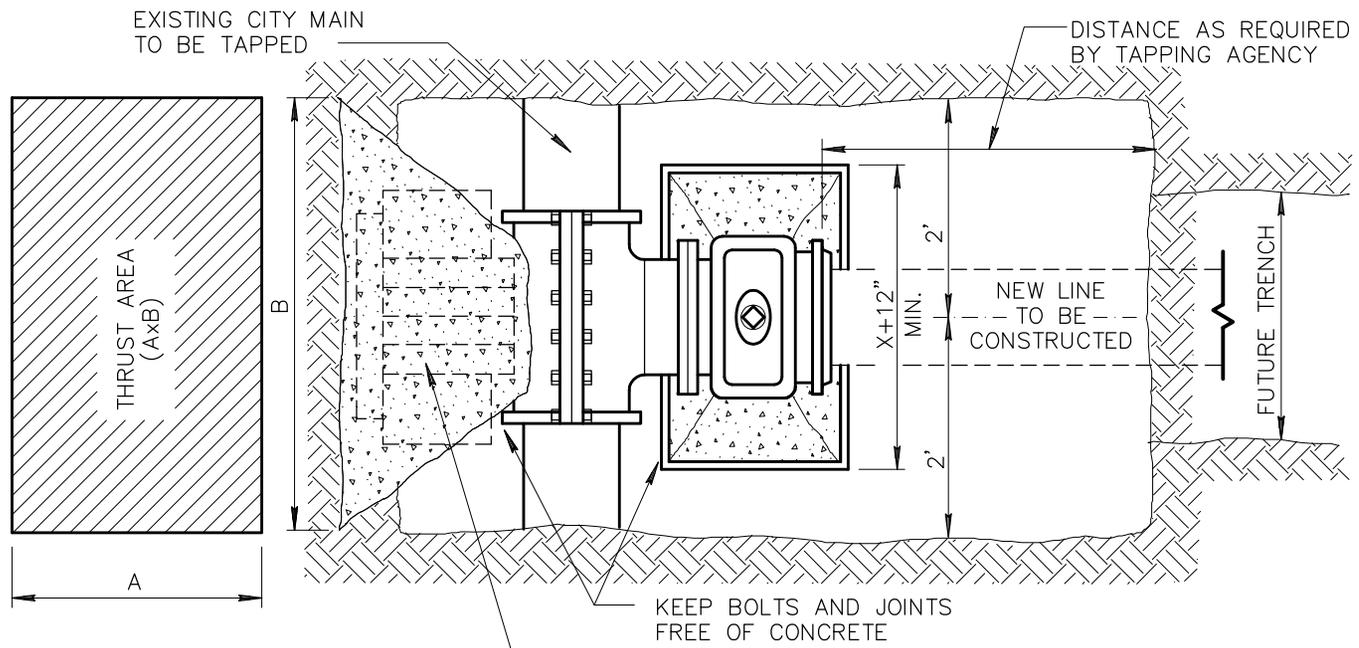

PLAN

OPTIONAL BLOCKING – 2" x 8" x 12" SOLID CONCRETE MASONRY UNITS AS INDICATED.

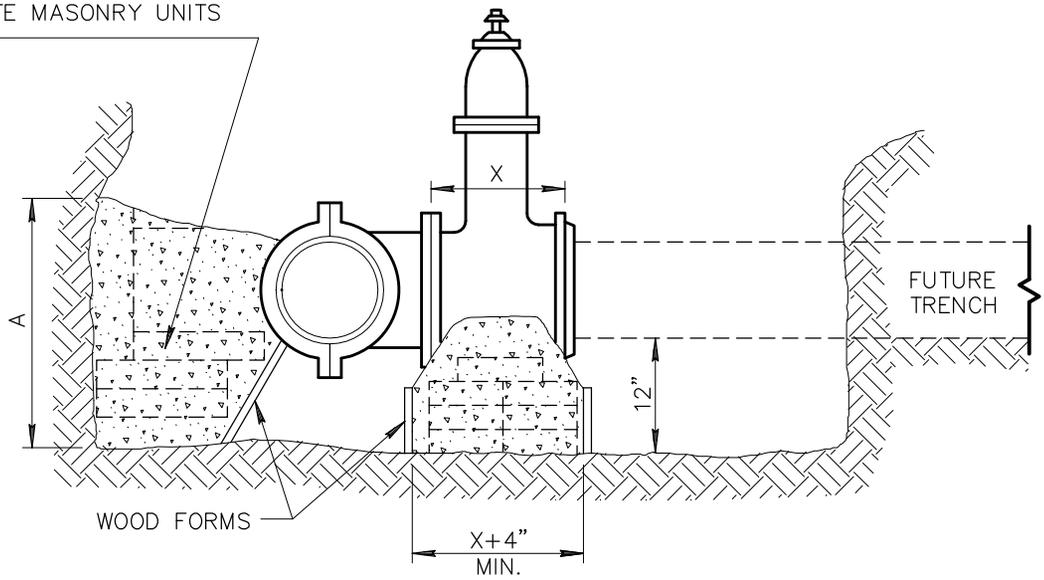


ELEVATION

NOTES:

1. TAPPING SLEEVE TO BE PLACED A MINIMUM OF 18" FROM ANY BELL COUPLING, VALVE, FITTING OR OTHER OBSTRUCTION
2. CONTRACTOR SHALL EXCAVATE AS SHOWN AND SHALL SET TAPPING SLEEVE AND VALVE AND TIGHTEN ALL BOLTS PRIOR TO THE PRESSURE TEST.
3. ALL TAPPING SLEEVES AND VALVES MUST BE PRESSURE TESTED PRIOR TO BLOCKING OR TAPPING. THE TEST MUST BE WITNESSED AND APPROVED BY THE INSPECTOR.
4. BLOCKS ARE TO EXTEND TO UNDISTURBED GROUND AND BE INSTALLED BEFORE THE TAP IS MADE. ALL FLANGE BOLTS SHALL BE FREE AND CLEAR OF CONCRETE.
5. CONCRETE THRUST BLOCKS SHALL BE CLASS 'B' PER SECT. 725. NORMALLY, CURE TIME FOR CONCRETE IS 24 HOURS BEFORE BACKFILLING.
6. TAPS SHALL BE MADE BY CITY CREWS AT PREVAILING RATES OR BY APPROVED CONTRACTORS WHEN ALLOWED BY AGENCY.
7. THIS DETAIL COVERS TAPPING SLEEVES 4" THROUGH 16" IN SIZE ON DUCTILE IRON, CAST IRON AND ASBESTOS CEMENT PIPE. ANY OTHER SIZE OR TYPE OF PIPE WILL REQUIRE A SEPARATE SUBMITTAL AND APPROVAL BY THE ENGINEER.

SIZE OF PIPE BEING CONNECTED	MINIMUM THRUST AREA REQUIRED EQUALS (AxB) (SQUARE FEET)
4" AND LESS	3
6"	4
8"	6
10"	9
12"	13
16"	23

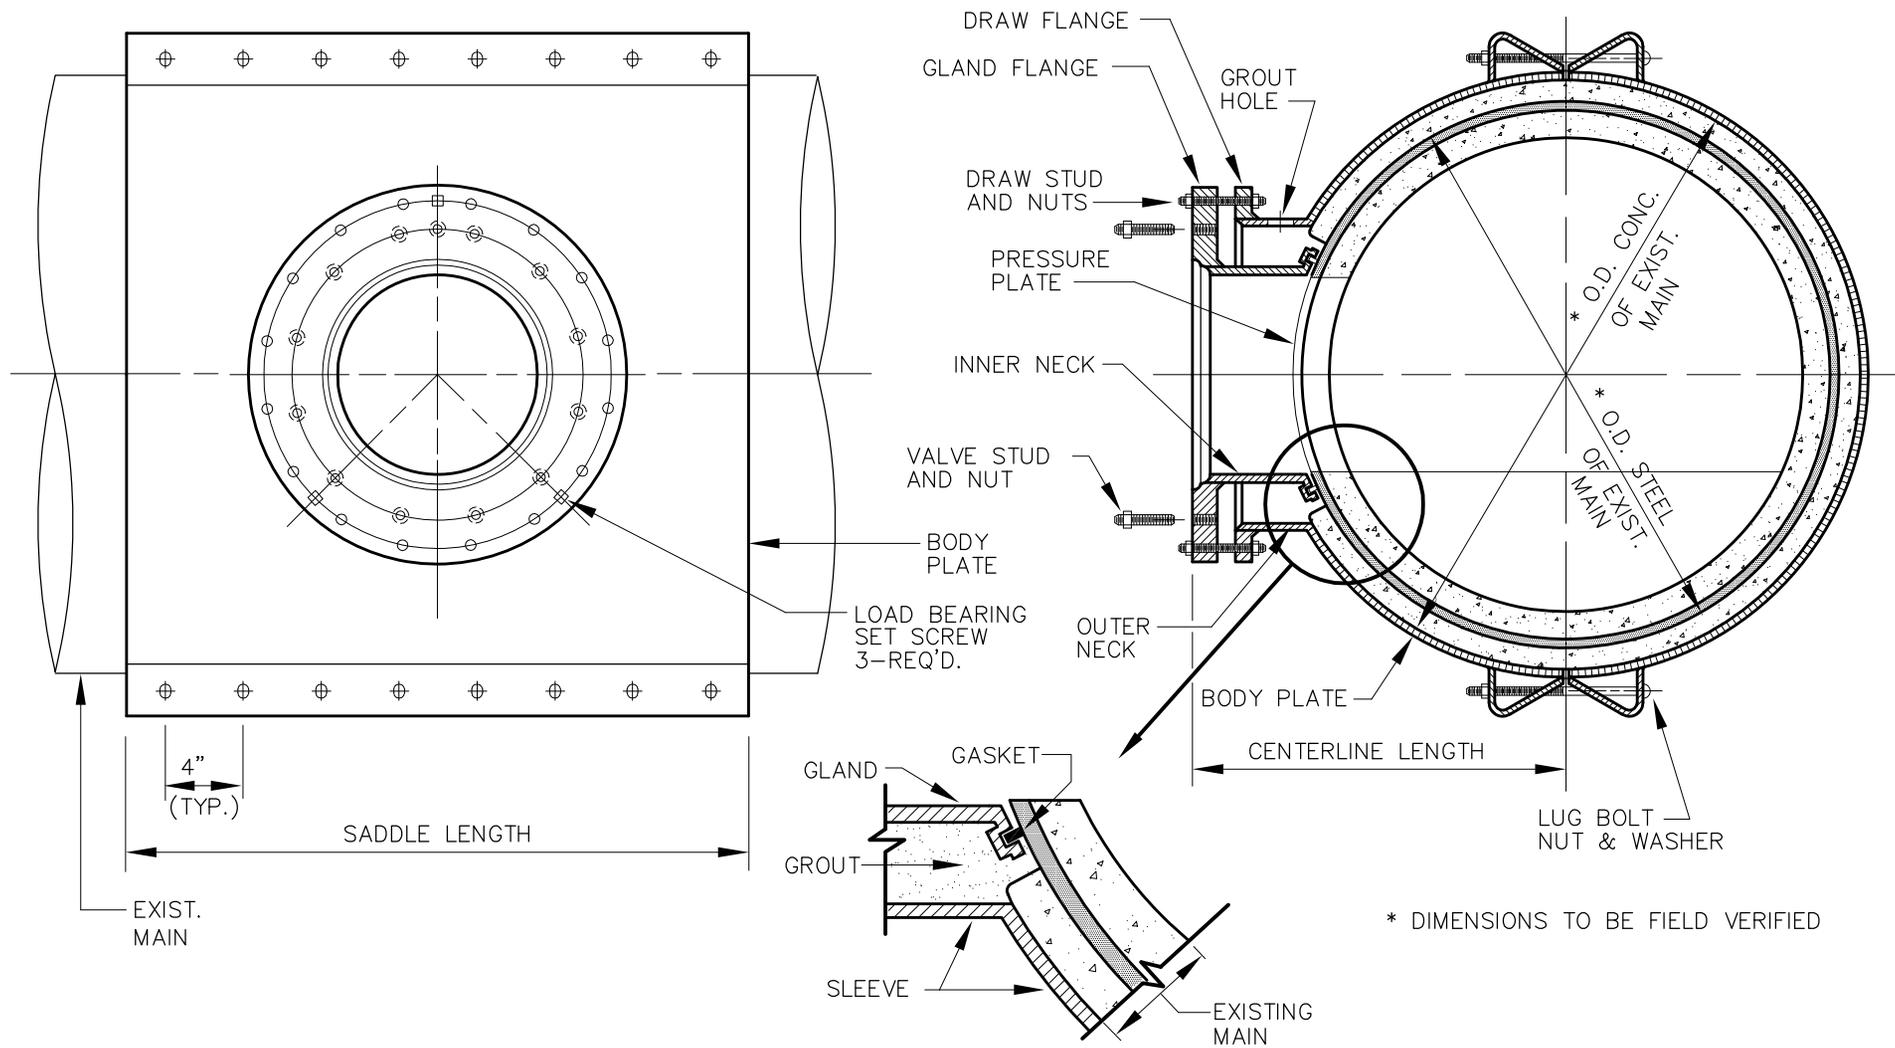

DETAIL NO.

342



STANDARD DETAIL
ENGLISH


CONCRETE PRESSURE PIPE
TAPPING SLEEVE

REVISED


01-01-1998

DETAIL NO.

342

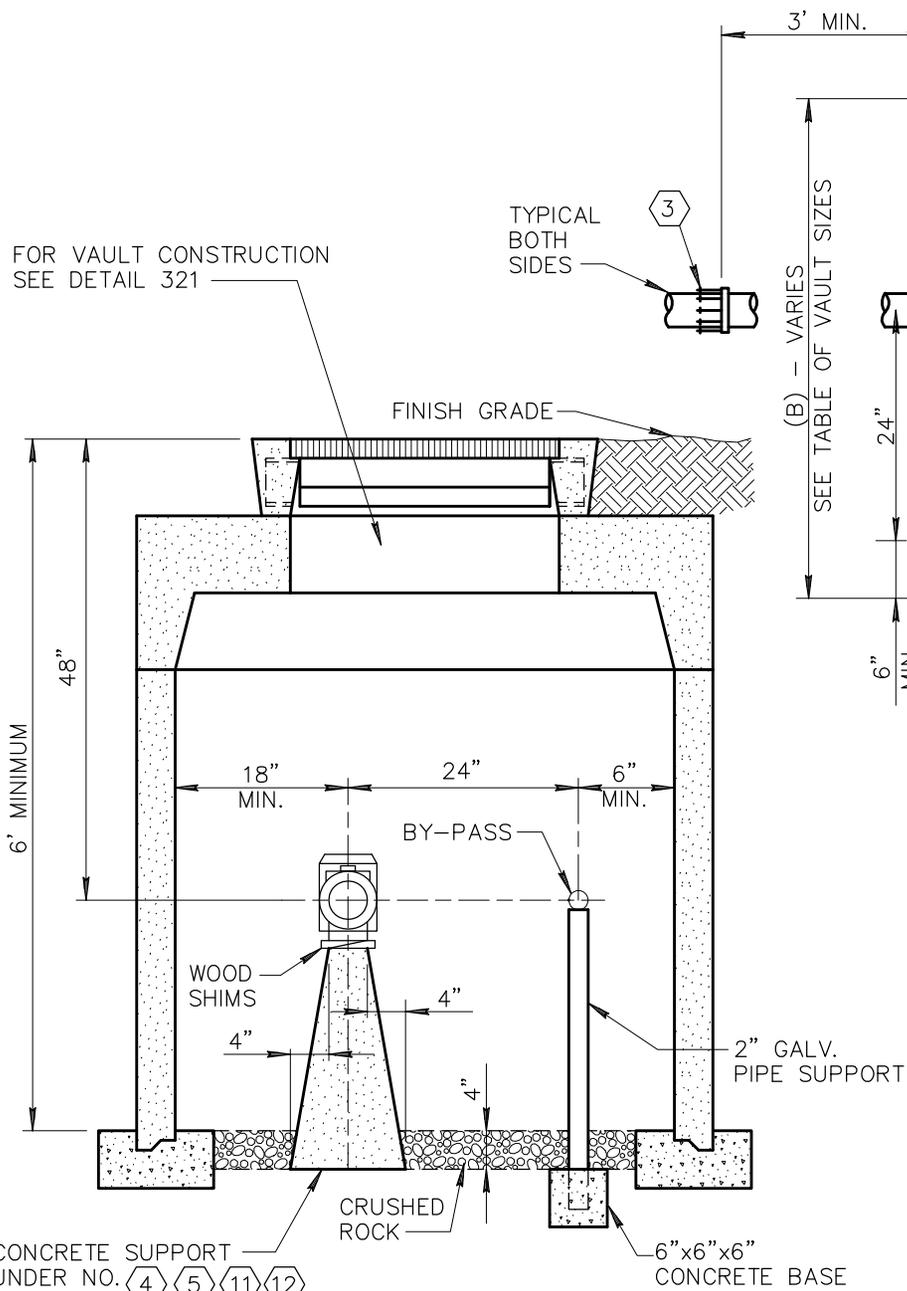

SECTION A-A

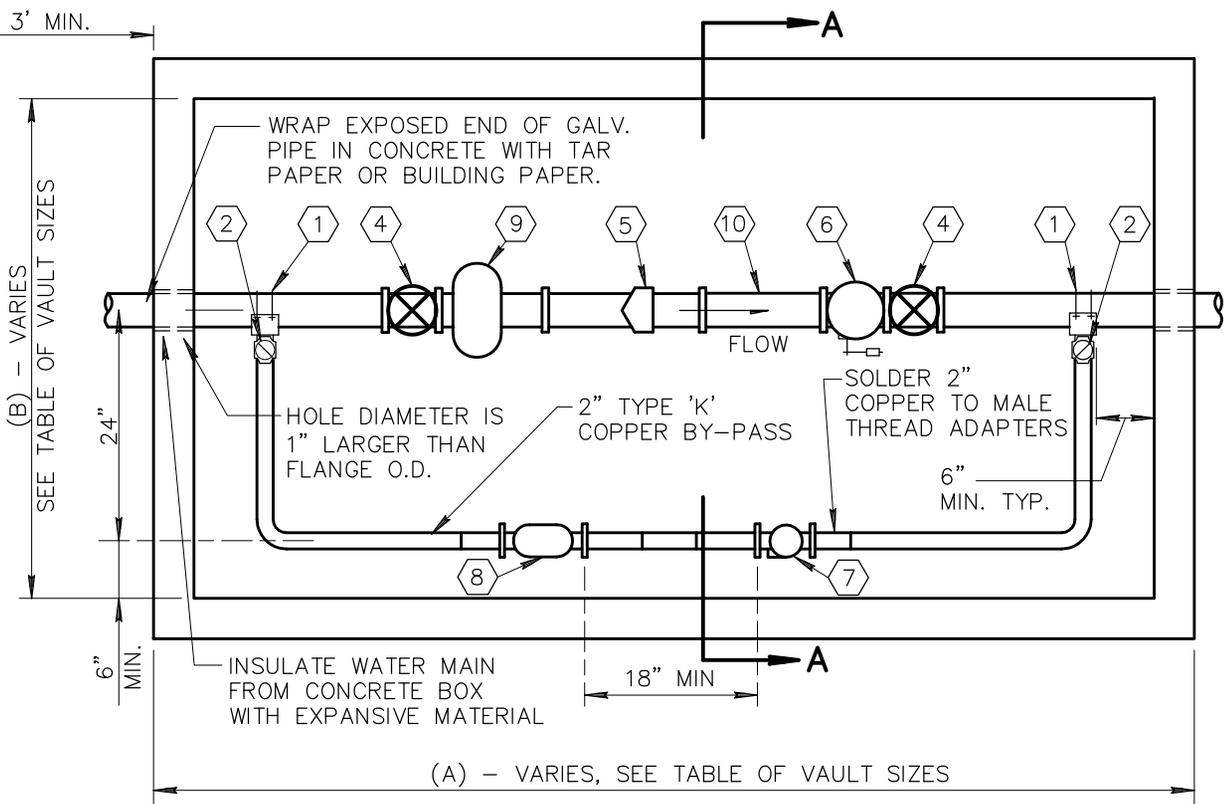

VAULT DIMENSION DETAILS

A.C.P. SIZE	3"	4"	6"
(A)	8'-4"	10'-6"	12'-0"
(B)	4'-4"	5'-0"	5'-0"

NOTE: METER VAULTS MAY BE EITHER CONCRETE MASONRY UNITS OR CAST-IN-PLACE OR PRE-CAST CONCRETE, SEE DETAIL 321 FOR VAULT CONSTRUCTION.

DETAIL NO.

345-1



STANDARD DETAIL
ENGLISH

3", 4", 6" WATER METER


REVISED

01-01-1998

DETAIL NO.

345-1

FOR VAULT CONSTRUCTION
SEE DETAIL 321

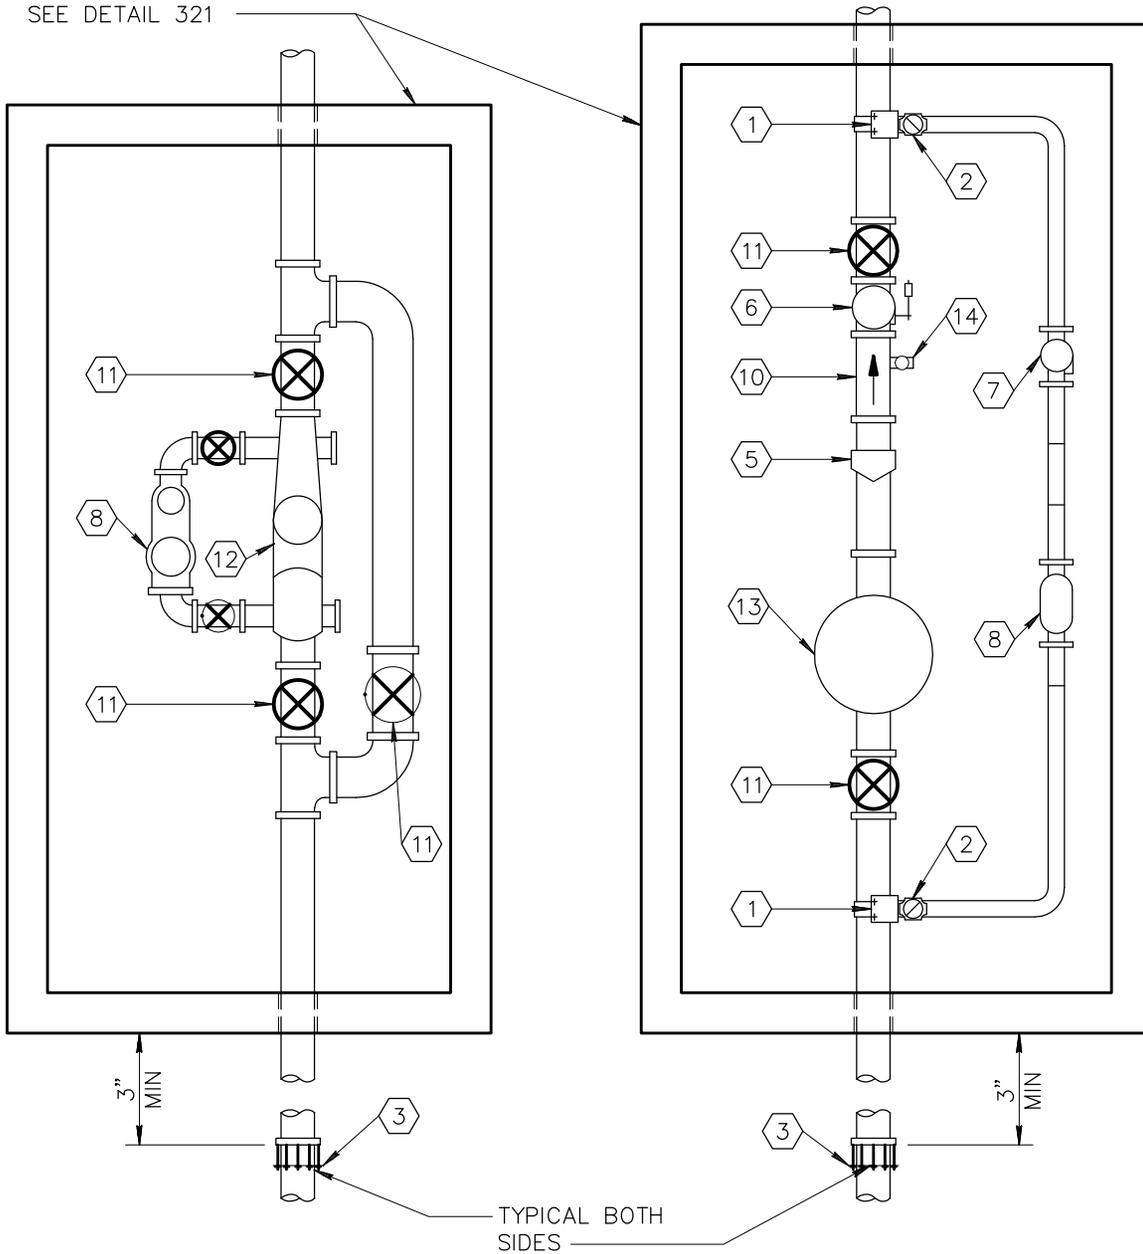

LEGEND

- ① DOUBLE STRAP ALL BRONZE SERVICE SADDLES.
- ② CORP. STOP, 2" (BALL TYPE).
- ③ ADAPTER, FLANGED, TO MECH. JOINT FOR A.C.P.
- ④ GATE VALVE, FLANGED, WITH HAND WHEEL, OPEN LEFT.
- ⑤ TURBOMETER: ROCKWELL SERIES 'W' OR HERSEY SERIES 'M.H.R.' OR NEPTUNE TRIDENT TURBINE.
- ⑥ FLANGED SWING CHECK VALVE WITH EXTERNAL LEVER AND WEIGHT.
- ⑦ 2" BRONZE CHECK VALVE.
- ⑧ 2" TURBOMETER: ROCKWELL 'W-160' OR HERSEY 'M.H.R.' OR NEPTUNE TRIDENT TURBINE.
- ⑨ STRAINER (3", 4", 6") AVAILABLE FROM METER MANUFACTURER, INSTALL ONLY WHEN 'TURBO' IS USED.
- ⑩ FLANGED SPOOL (3 PIPE DIAMETERS IN LENGTH).
- ⑪ O.S.&Y. GATE VALVE, FLANGED WITH HAND WHEEL OPEN LEFT, AND RISING STEM.
- ⑫ TURBOMETER U.L. APPROVED: ROCKWELL W-5000 DR. OR W-2000 DR. OR HERSEY F.M.-C.T. OR NEPTUNE TURBINE-F.S.-U.L.
- ⑬ 6" OR 10" STRAINER, U.L. APPROVED.
- ⑭ 2" THREADED OUTLET AND GATE VALVE.

NOTES

1. FOR LARGER METERS, SPECIAL VAULT DESIGN IS REQUIRED.
2. USE OF REMOTE READING DEVICE AT OPTION OF UTILTY.
3. CERTAIN AGENCIES AND/OR UTILITIES PREFER TO CONSTRUCT VAULT, CONTACT AGENCY INVOLVED PRIOR TO VAULT CONSTRUCTION.

DETAIL NO.
345-2




STANDARD DETAIL
ENGLISH

**4", 6" WATER METER
WITH ON-SITE FIRE HYDRANTS**

REVISED
01-01-1998

DETAIL NO.
345-2

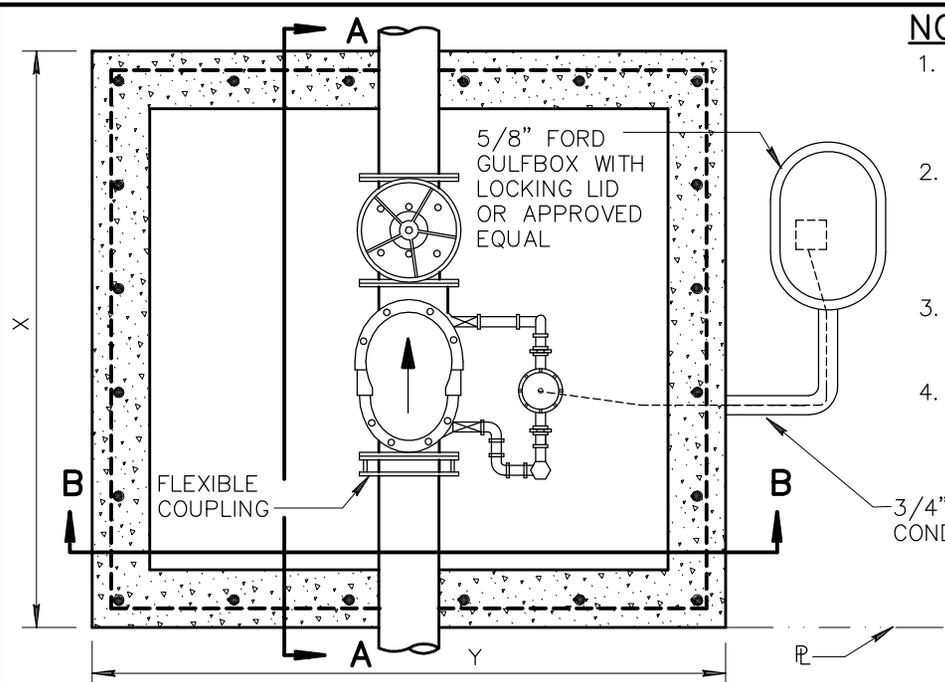


NOTES:


1. FIRELINE FROM CITY MAIN TO PROPERTY LINE SHALL BE CONSTRUCTED OF CAST IRON PIPE.
2. REINFORCING TO BE 1/2" DIAMETER REBAR ON 6" CENTERS EACH WAY ON TOP AND 12" CENTERS EACH WAY ON THE SIDES.
3. COVERS TO CONSIST OF TWO METER BOX COVERS DET. 314.
4. BY-PASS METER TO BE ACCORDING TO GOVERNING AGENCY.
5. CHECK VALVE TO BE GLOBE MODEL "A" GRINNEL, HERSEY MODEL D.C., VIKING MODEL "A" OR APPROVED EQUAL.
6. VAULT SHALL BE CONSTRUCTED IN OWNERS PROPERTY AGAINST THE FRONT PROPERTY LINE OR ANOTHER APPROVED LOCATION. WALLS AND FENCES SHALL NOT OBSTRUCT ACCESS.
7. CITY CONTROL VALVE TO BE REQUIRED AT MAIN.
8. PARTS OF PIPE TO BE EMBEDDED IN CONC. SHALL BE WRAPPED WITH 30 LB ASPHALT ROOFING FELT.
9. REMOTE READING DEVICE SHALL BE OF SELF GENERATING ELECTRICAL TYPE. HYDRAULIC OR MECHANICAL DRIVE REGISTERS WILL NOT BE ACCEPTABLE.
10. CONCRETE TO BE CLASS 'B' PER SECT. 725.

DIA. OF PIPE	X	Y	Z	BY-PASS METER SIZE	A
4"	60"	66"	49"	5/8" x 3/4"	30"
6"	66"	72"	49"	5/8" x 3/4"	30"
8"	72"	72"	58"	1"	36"
10"	78"	72"	69"	1-1/2"	36"

PLAN VIEW-BELOW COVER

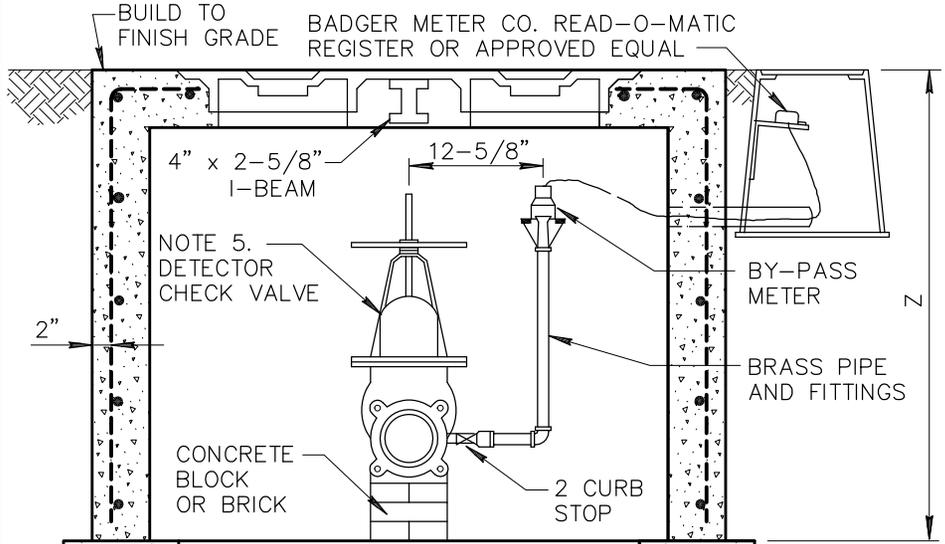

SECTION B-B

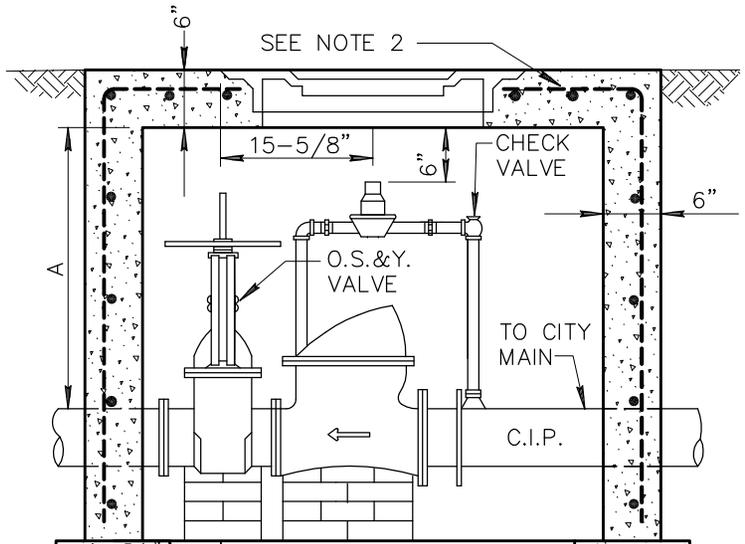

SECTION A-A

DETAIL NO.

346



STANDARD DETAIL
ENGLISH


FIRE LINE DETECTOR CHECK VAULT

REVISED

01-01-1998


DETAIL NO.

346

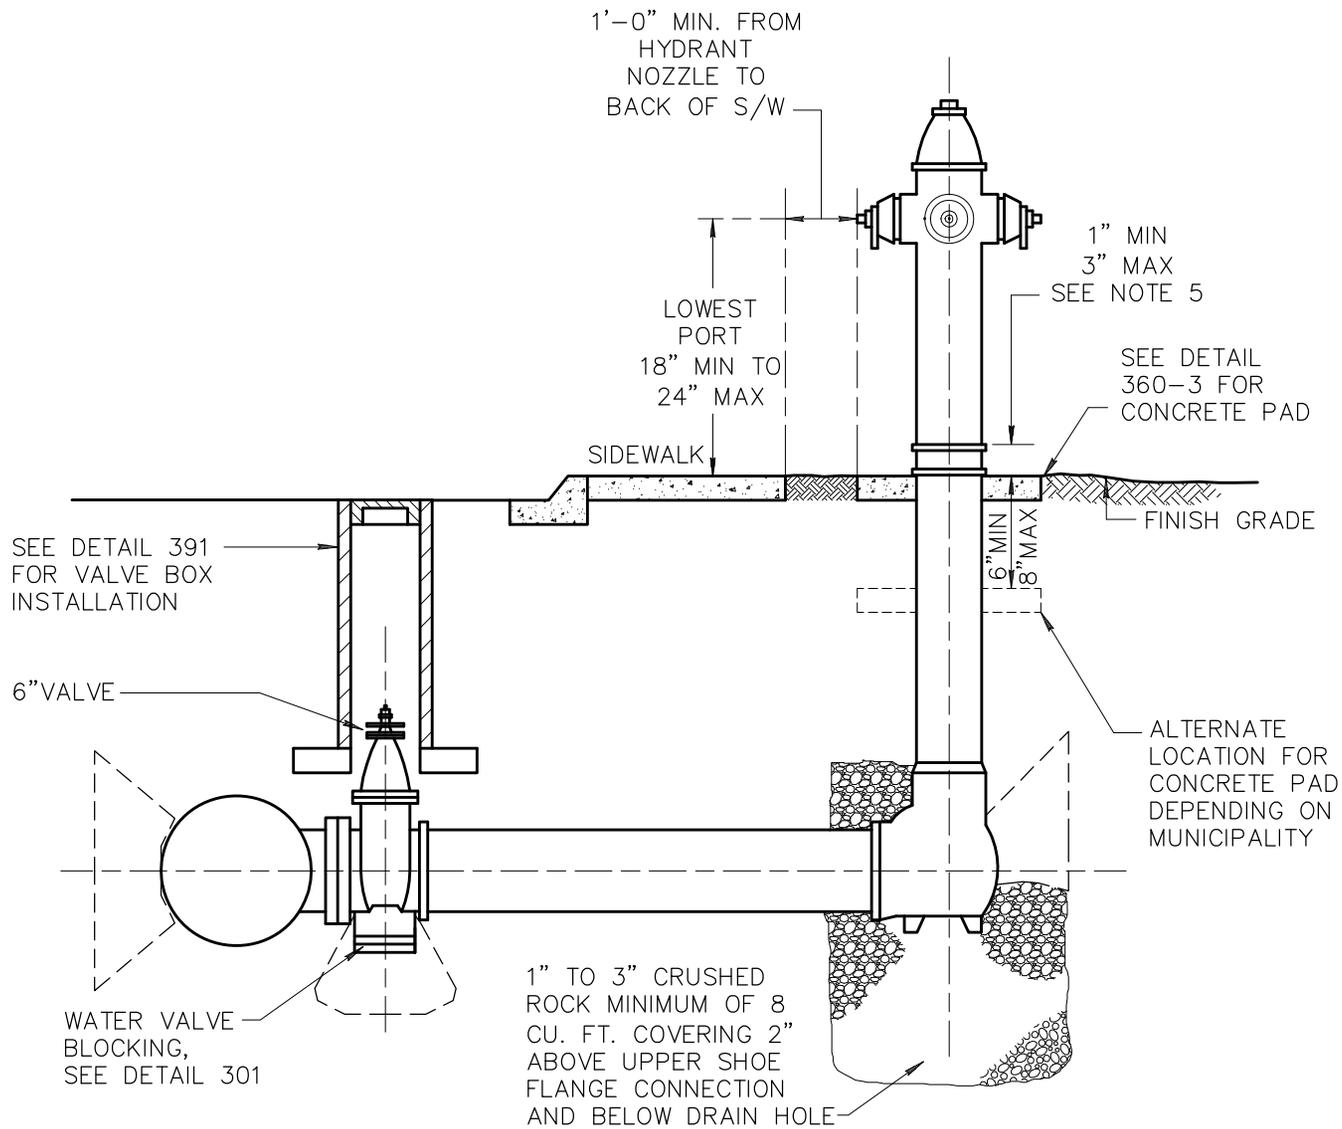

NOTES:

1. JOINTS BETWEEN THE VALVE AND THE MAIN SHALL BE FLANGED TYPE. JOINTS BETWEEN THE VALVE AND HYDRANT SHALL BE RESTRAINT OR MECHANICAL TYPE.
2. RESTRAINTS SHALL BE MECHANICAL RESTRAINT OR THRUST BLOCK PER DETAIL 380.
3. A FLANGE JOINT BY MECHANICAL JOINT VALVE SHALL BE USED AS THE TRANSITION BETWEEN THE JOINT TYPES.
4. PIPING BETWEEN WATER VALVE AND HYDRANT SHALL BE DUCTILE IRON.
5. SEE DETAIL 362 FOR LOCATION OF HYDRANT.
6. PUMPER CONNECTION SHALL FACE THE STREET.
7. NO VALVES ARE TO BE LOCATED IN CURB.
8. NATIONAL STANDARD THREADS REQUIRED ON ALL CONNECTIONS UNLESS OTHERWISE DIRECTED.
9. SEE DETAIL 360-3 FOR CONCRETE PAD.
10. FIRE HYDRANT SHALL BE FRESHLY PAINTED PRIOR TO FINAL ACCEPTANCE.
11. SEE SECTION 756 FOR HYDRANT MATERIAL.

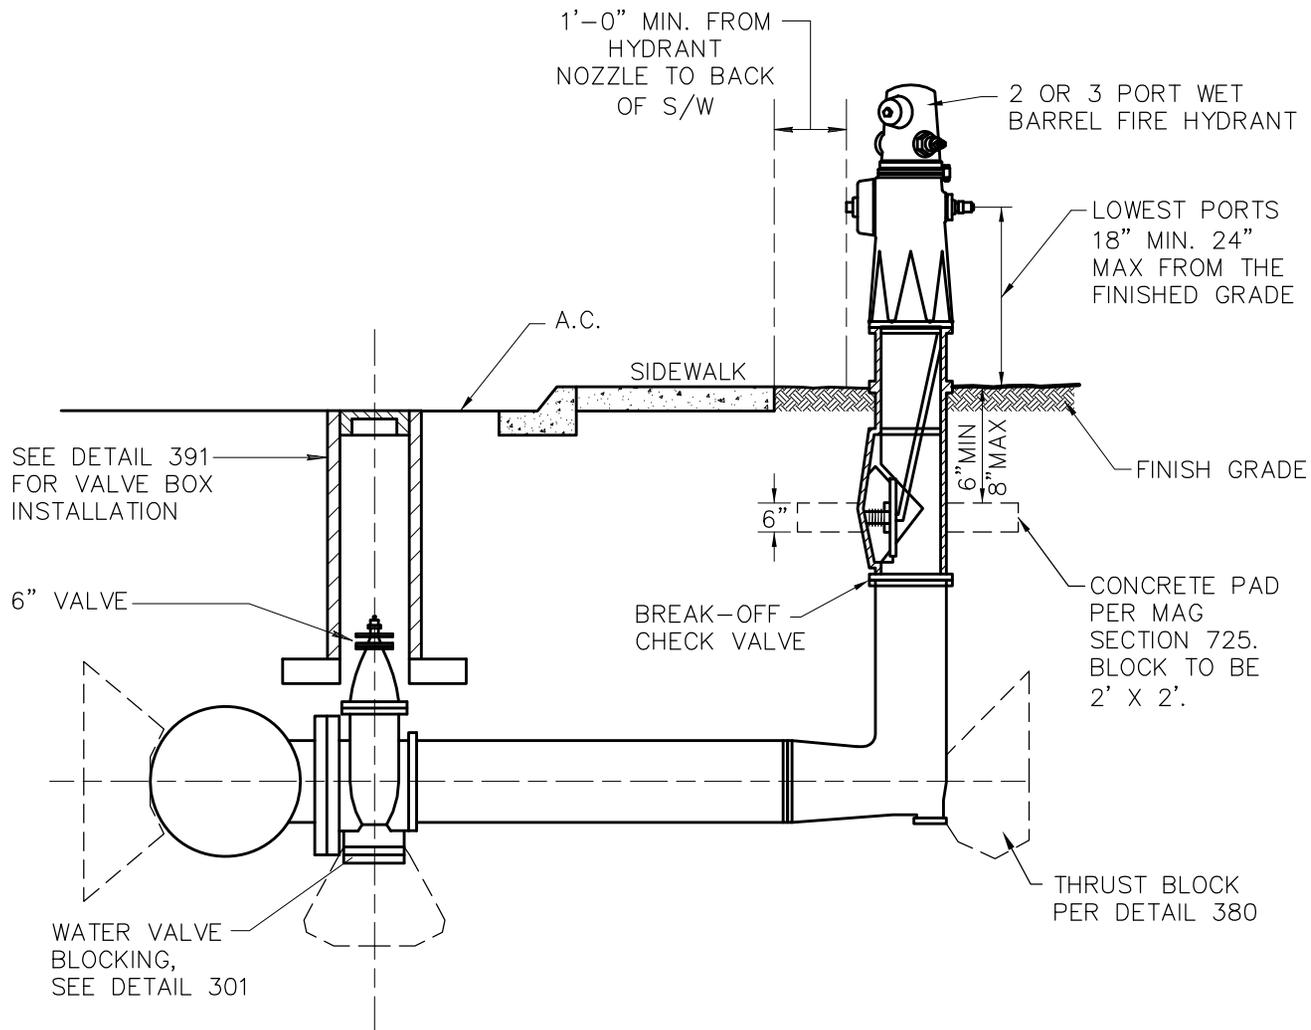

NOTES:

1. JOINTS BETWEEN THE VALVE AND THE MAIN SHALL BE FLANGED TYPE. JOINTS BETWEEN THE VALVE AND HYDRANT SHALL BE MECHANICAL RESTRAINT MECHANICAL TYPE.
2. RESTRAINTS SHALL BE MECHANICAL RESTRAINT OR THRUST BLOCK PER DETAIL 380.
3. A FLANGE JOINT BY MECHANICAL JOINT VALVE SHALL BE USED AS THE TRANSITION BETWEEN THE JOINT TYPES.
4. PIPING BETWEEN WATER VALVE AND HYDRANT SHALL BE DUCTILE IRON.
5. SEE DETAIL 362 FOR LOCATION OF HYDRANT.
6. PUMPER CONNECTION SHALL FACE THE STREET.
7. NO VALVES ARE TO BE LOCATED IN CURB.
8. NATIONAL STANDARD THREADS REQUIRED ON ALL CONNECTIONS UNLESS OTHERWISE DIRECTED.
9. SEE DETAIL 360-3 FOR CONCRETE PAD.
10. FIRE HYDRANT SHALL BE FRESHLY PAINTED PRIOR TO FINAL ACCEPTANCE.
11. THE HYDRANT SHALL HAVE 2- 2½" PORT AND 1- 4½" PORT (INDUSTRIAL OR COMMERCIAL).
12. THE HYDRANT SHALL HAVE 1- 2½" PORT AND 1- 4½" PORT (RESIDENTIAL).

DETAIL NO.

360-2



STANDARD DETAIL
ENGLISH


WET BARREL FIRE HYDRANT INSTALLATION

REVISED


01-01-2013

DETAIL NO.

360-2


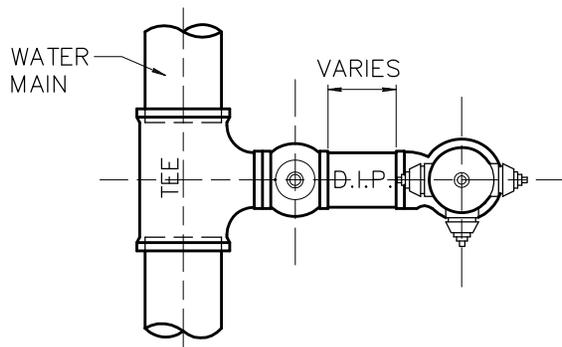


TYP MAIN CONNECTION
(PREFERRED)

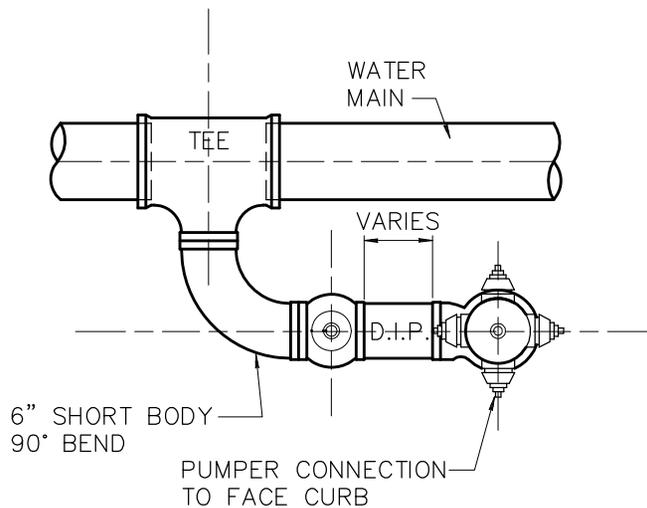


ALT MAIN
CONNECTION

SQUARE OR ROUND IS ACCEPTABLE
IF ROUND: 24" DIAMETER MIN. REQUIRED

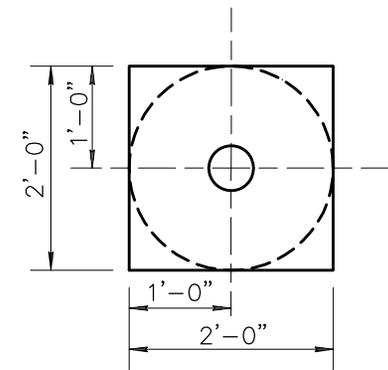

CONCRETE PAD
LOCATION DETAIL

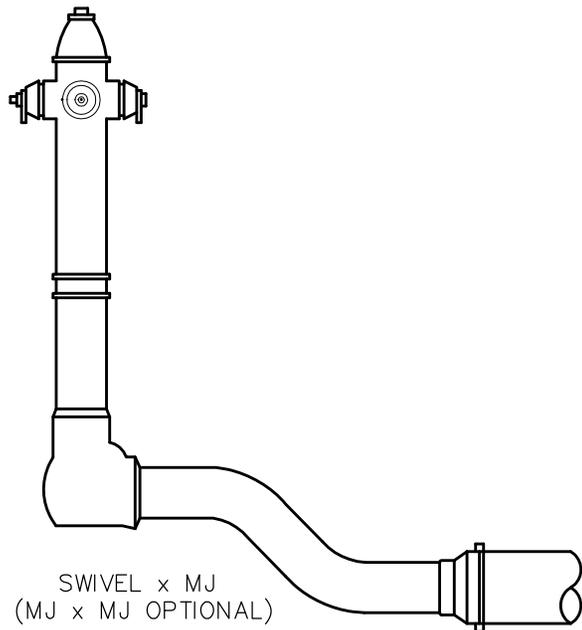


OFFSET FITTINGS

NOTES:


1. CONCRETE FOR PAD SHALL BE CLASS "A".
2. SCORE LINE SHALL BISECT CONCRETE PAD AT MID POINT OF ALL SIDES.
3. CONCRETE COLOR SHALL MATCH ADJACENT CONCRETE. THE FINISHED CONCRETE SURFACE SHALL HAVE A ROUGH BROOM FINISH (SURFACE ONLY).
4. MULTIPLE OFFSET FITTINGS SHALL NOT BE ALLOWED.
5. MINIMUM 36" CLEARANCE PER NFPA-24 AROUND FIRE HYDRANT.
6. 1/2" BITUMINOUS EXPANSION SHALL BE PLACED AROUND THE BARREL OF THE FIRE HYDRANT AT THE CONCRETE PAD.

NOTES:


1. OBSTRUCTIONS SUCH AS UTILITY POLES, STREET SIGNS, IRRIGATION BOXES, FENCES, ETC., MUST NOT BE PLACED BETWEEN CURB AND HYDRANT AND WITHIN THE RADIUS FOR FIRE DEPT. ACCESS.
2. DIMENSIONS SHOWN ON CONSTRUCTION DRAWINGS SUPERSEDE LOCATIONS SHOWN HERE.
3. ON LOCATIONS IN MIDBLOCK, THE FIRE HYDRANT WILL BE ALIGNED WITH A PROPERTY LINE.

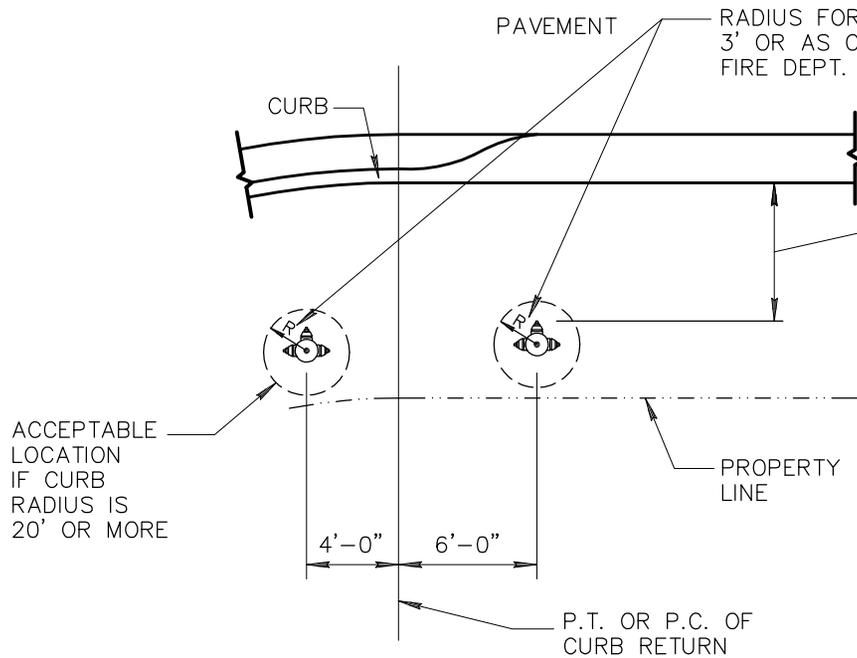


PARKWAY AREA OR NO SIDEWALK

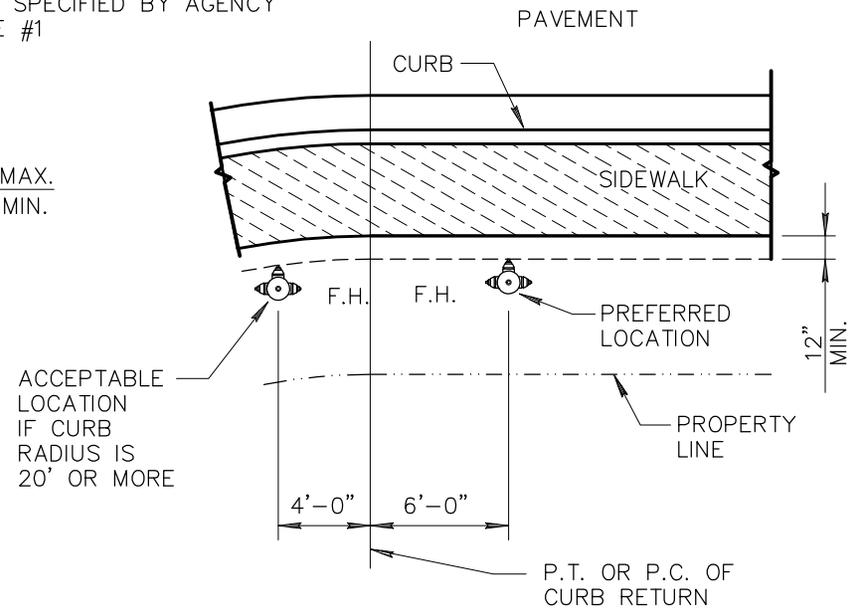


AREA WITH SIDEWALK

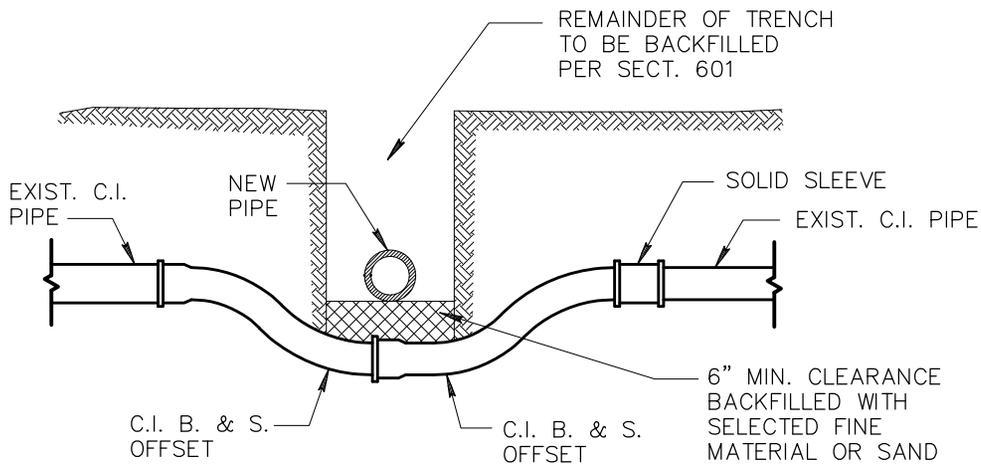

CAST IRON

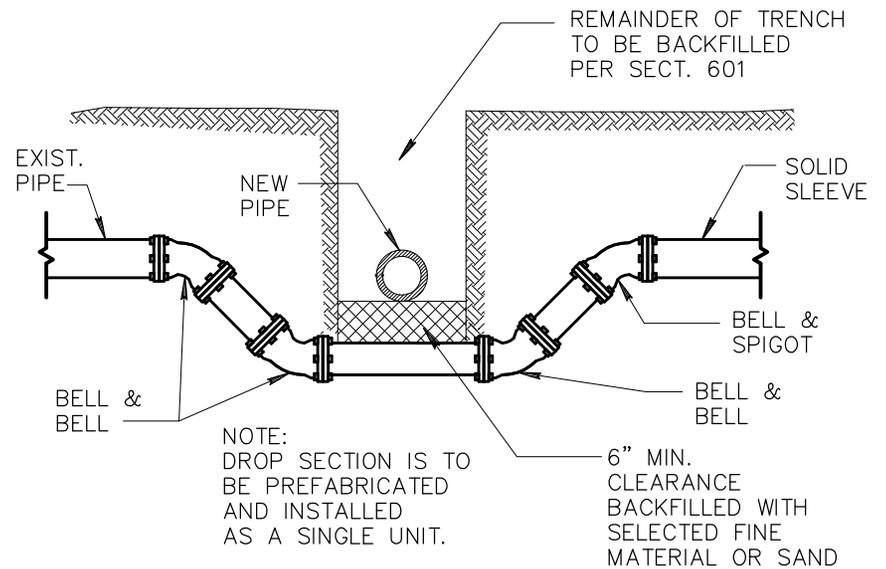

CAST IRON MECHANICAL JOINT




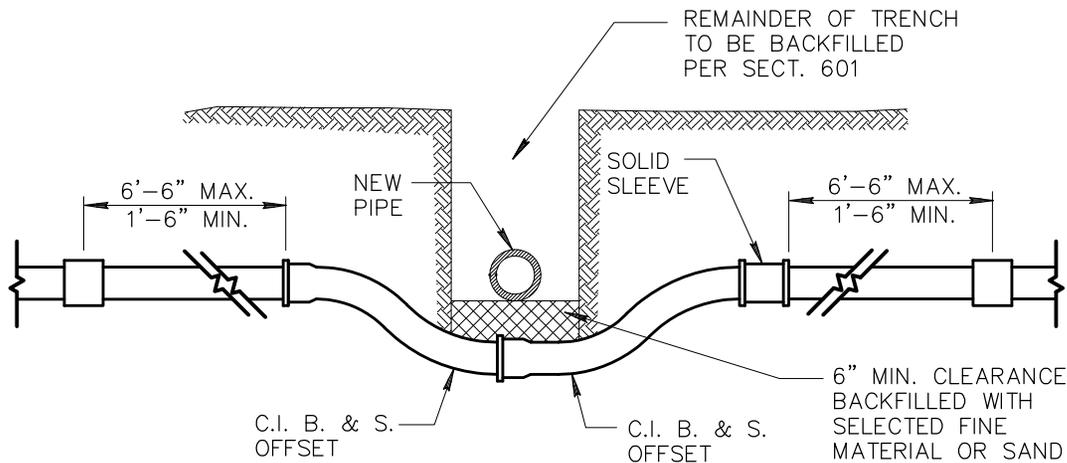


ASBESTOS CEMENT




NOTES:

1. THIS DETAIL COVERS MOVING OF WATER MAINS 2" TO 12" ONLY.
2. THRUST BLOCKING AS PER DET. 380 & 381.
3. IF OFFSET IS TO GO OVER OBSTRUCTION, JOINT RESTRAINTS MUST BE USED.
4. PIPE IS TO BE CAST IRON OR DUCTILE IRON.


TYPICAL LOCATIONS OF THRUST BLOCKS

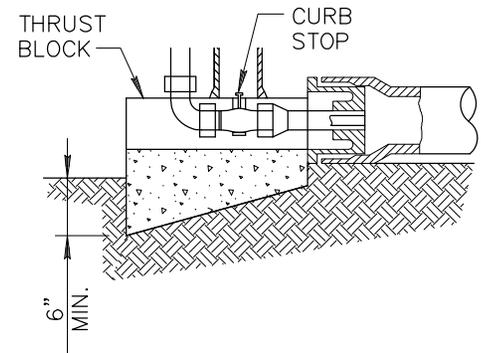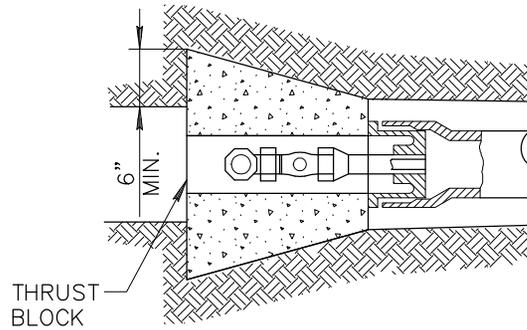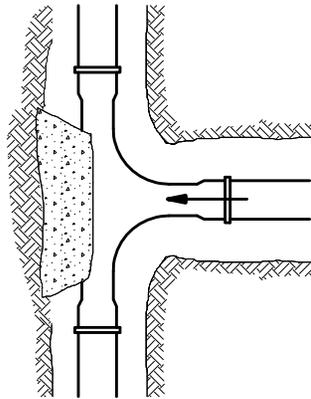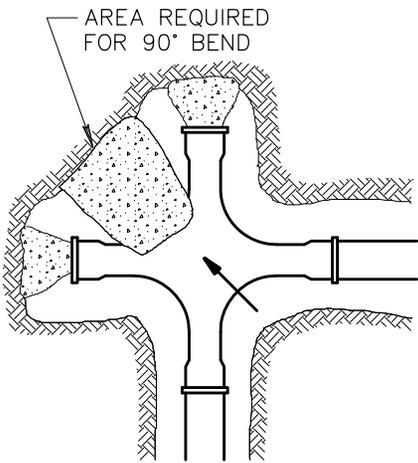

1/2 AREA REQUIRED FOR 90° BEND

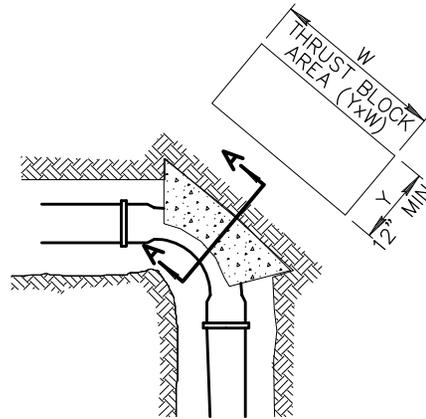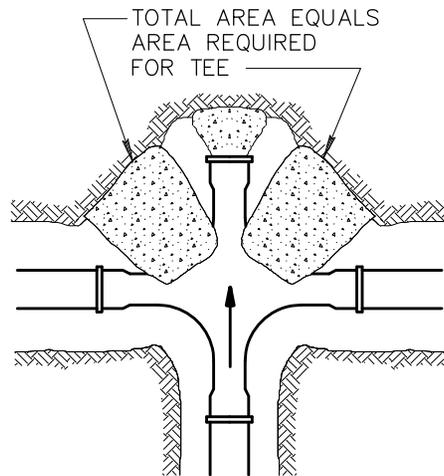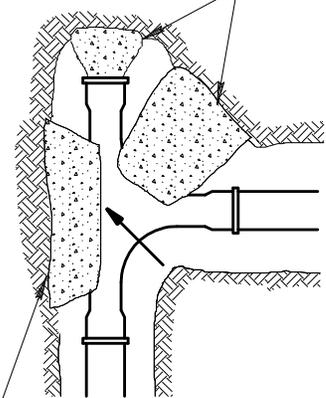

AREA FOR TEE



NOTES:

1. TABLE IS BASED ON 200 P.S.I. TEST PRESSURE AND 3,000 LBS/SQ. FT. SOIL. IF CONDITIONS ARE FOUND TO INDICATE SOIL BEARING IS LESS, THE AREAS SHALL BE INCREASED ACCORDINGLY.
2. AREAS FOR PIPES LARGER THAN 16" SHALL BE CALCULATED FOR EACH PROJECT.
3. FORM ALL NON-BEARING VERTICAL SURFACES.
4. THRUST BLOCKS ARE TO EXTEND TO UNDISTURBED GROUND. CONCRETE TO BE CLASS 'C', SECT. 725.

MINIMUM THRUST BLOCK AREA REQUIRED (YxW) (SQ. FT.)

PIPE SIZE	WATER PIPE	
	TEE, DEAD END, 90° BEND	45° & 22 1/2° BENDS
4" OR LESS	3	3
6"	4	3
8"	6	3
10"	10	5
12"	14	7
16"	24	12

DETAIL NO.

380



STANDARD DETAIL
ENGLISH

THRUST BLOCKS FOR WATER LINES

REVISED

01-01-1998

DETAIL NO.


380

PIPE SIZE	MIN BAR SIZE	"A" - DIMENSION HOOK	MIN. * BLOCK DIM.
6"	#6	6"	3' x 3' x 3'
8"	#6	9"	4' x 4' x 2.5'
12"	#8	9"	4' x 4' x 5'

* FOR 125 P.S.I. WORKING PRESSURE.

NOTES:

1. EITHER THIS DETAIL OR RESTRAINT RODS CAN BE USED WHEN IT IS ALLOWED TO RELOCATE A WATER LINE UPWARD OR DOWNWARD TO CROSS A CONFLICT.
2. DUCTILE IRON PIPE MAY BE USED.
3. BARS TO CONCRETE THRUST BLOCK TO BE COATED WITH 2 COATS COAL TAR, EPOXY OR BY OTHER APPROVED METHOD. BARS TO HAVE 90° HOOK ON LOWER END, AS PER TABLE.

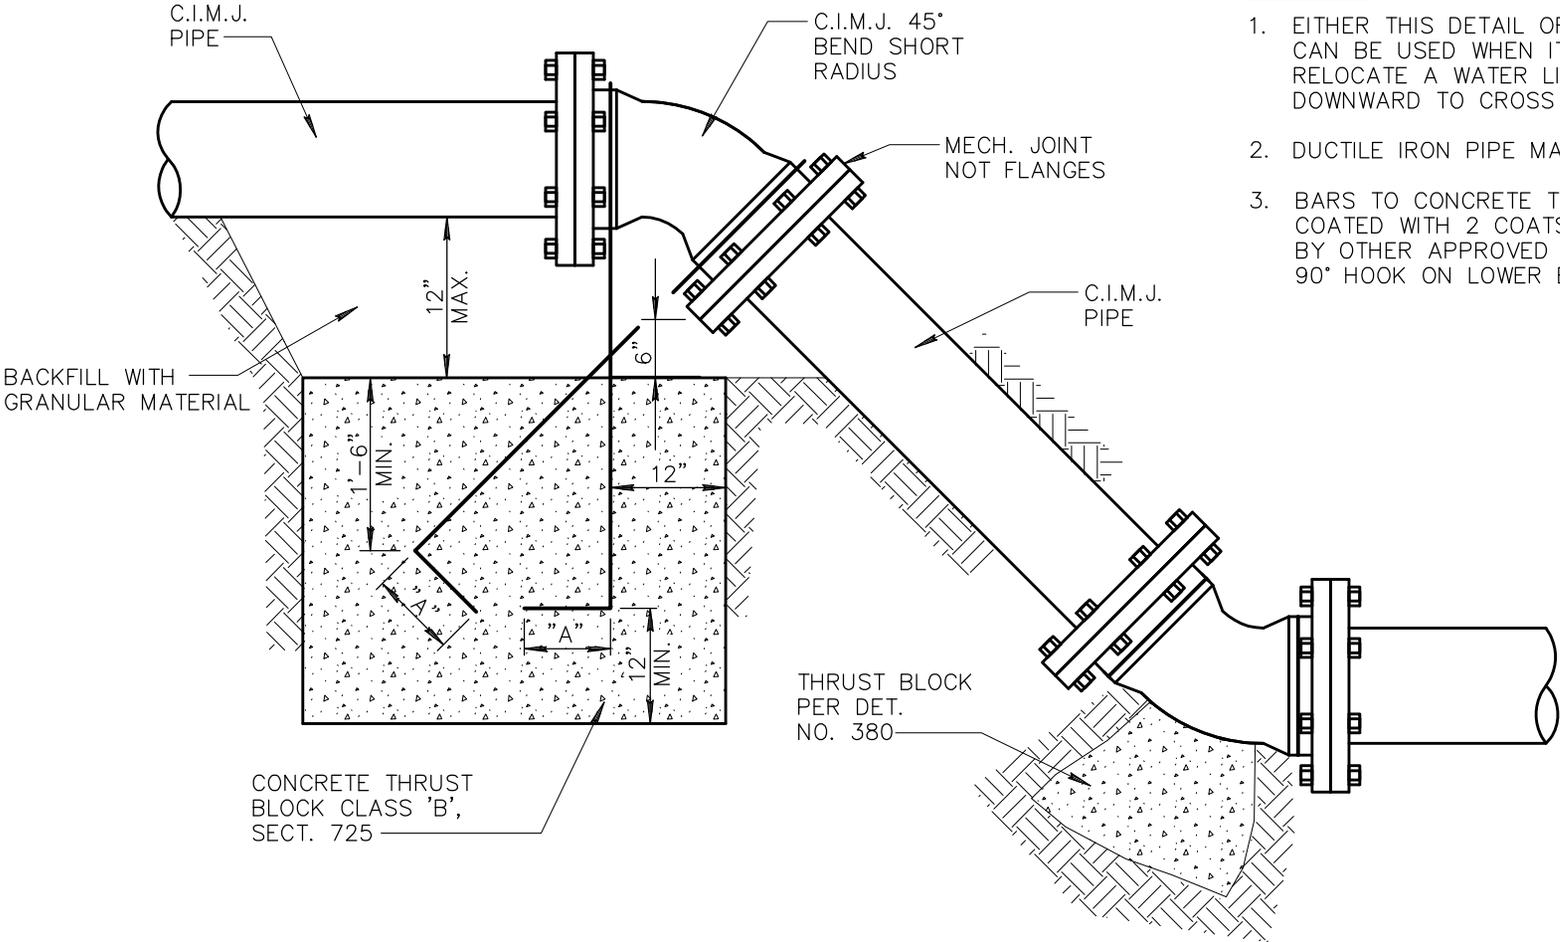




ENLARGED
'A'

FRAME AND
COVER PER
DETAIL 270


POURED CONCRETE COLLAR 8" THICK
AND 40" SQUARE OR ROUND, VALVE BOX
CENTER. CLASS 'AA' CONCRETE AS
PER SECTION 725. RADIALLY SCORE JOINTS (4" MIN)
MEDIUM BROOM FINISH

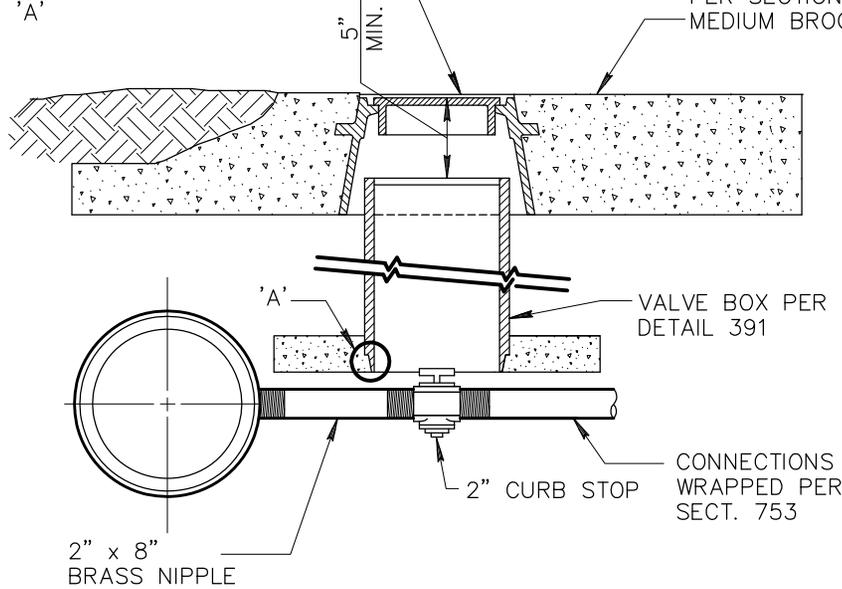

TYPE 'A'

NOTES:

1. CURB STOP TO BE MUELLER ORISEAL (H-10283), FORD BALL VALVE B11-777, HAYES BULLETIN 400, J. JONES (J-1900) OR APPROVED EQUAL.
2. REDUCER MAY BE USED WHEN CONNECTING TO SMALLER GALVANIZED PIPE.
3. THIS DETAIL IS TO BE USED WHEN CONNECTING EXISTING GALVANIZED PIPE TO ASBESTOS CEMENT PIPE OR CAST IRON PIPE.

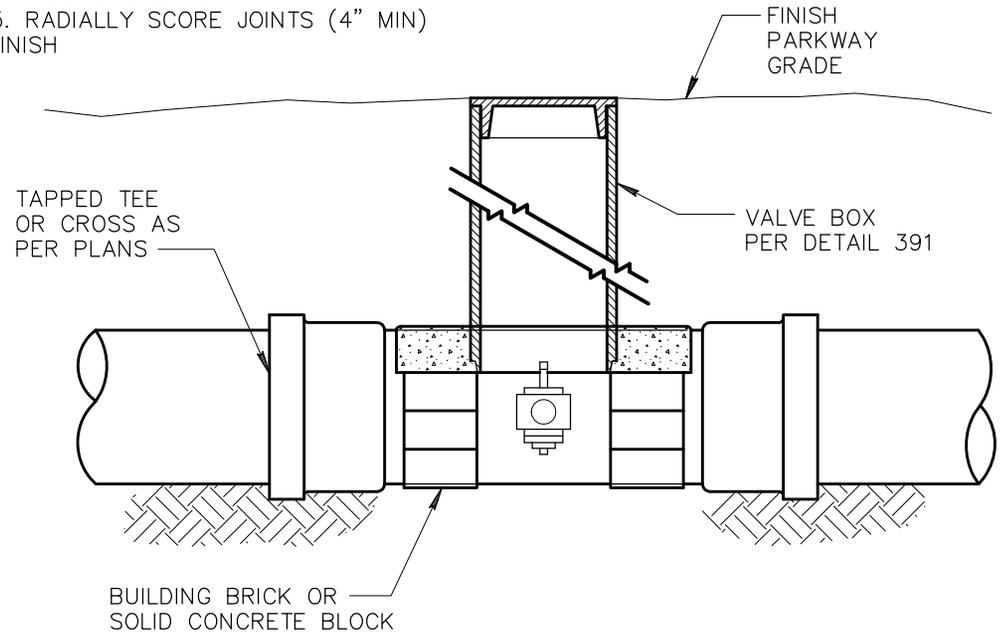

TYPE 'B'

NOTE:

1. VALVE BOX TO BE SUPPORTED ON BRICKS TO PREVENT VERTICAL LOADS FROM BEING TRANSMITTED TO THE SMALL PIPE.

DETAIL NO.

389



STANDARD DETAIL
ENGLISH


**CURB STOP WITH VALVE BOX
AND COVER**

REVISED

01-01-2001

DETAIL NO.

389

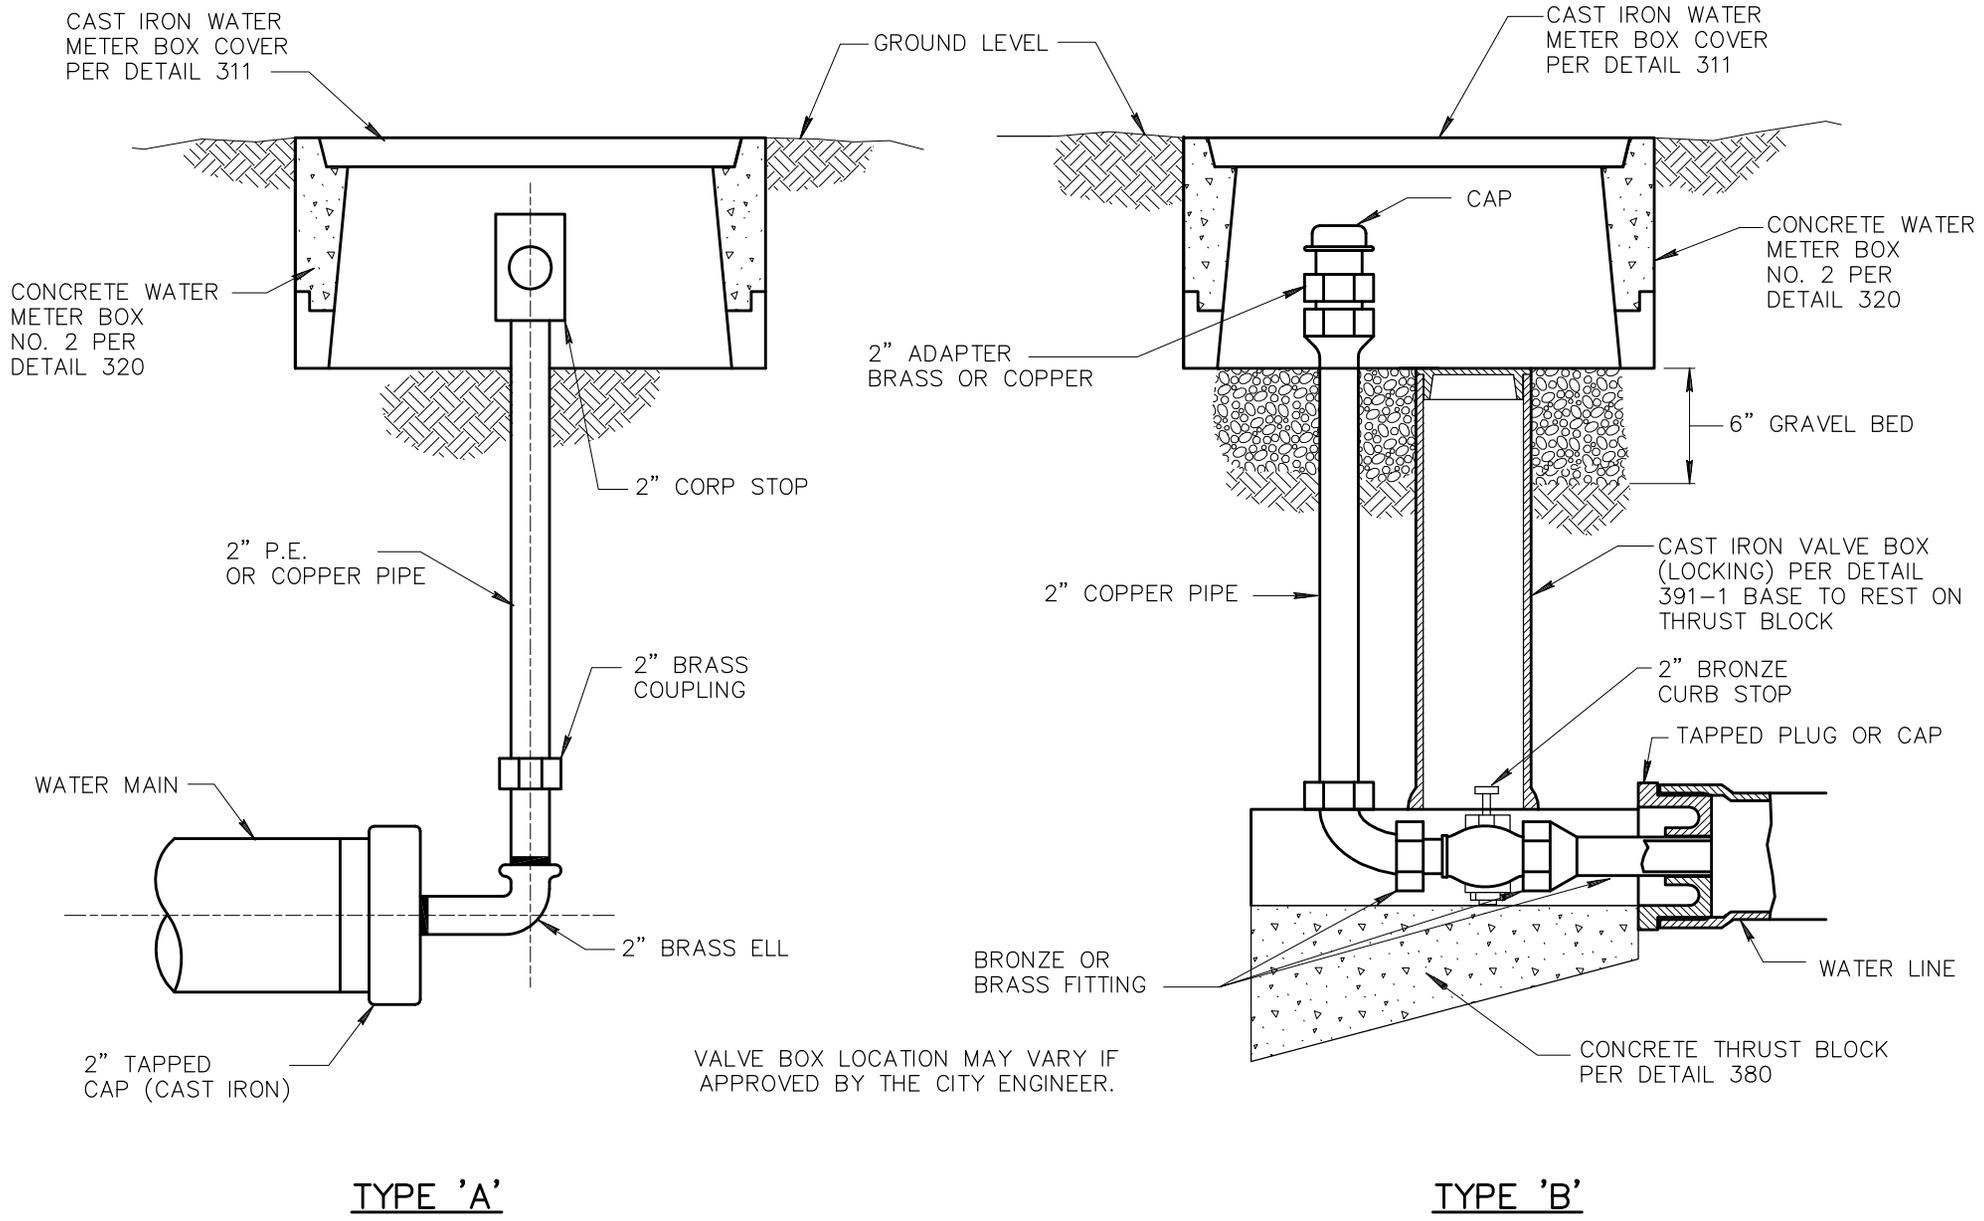

DETAIL NO.
390




STANDARD DETAIL
ENGLISH

CURB STOP WITH FLUSHING PIPE

REVISED
01-01-1998

DETAIL NO.
390

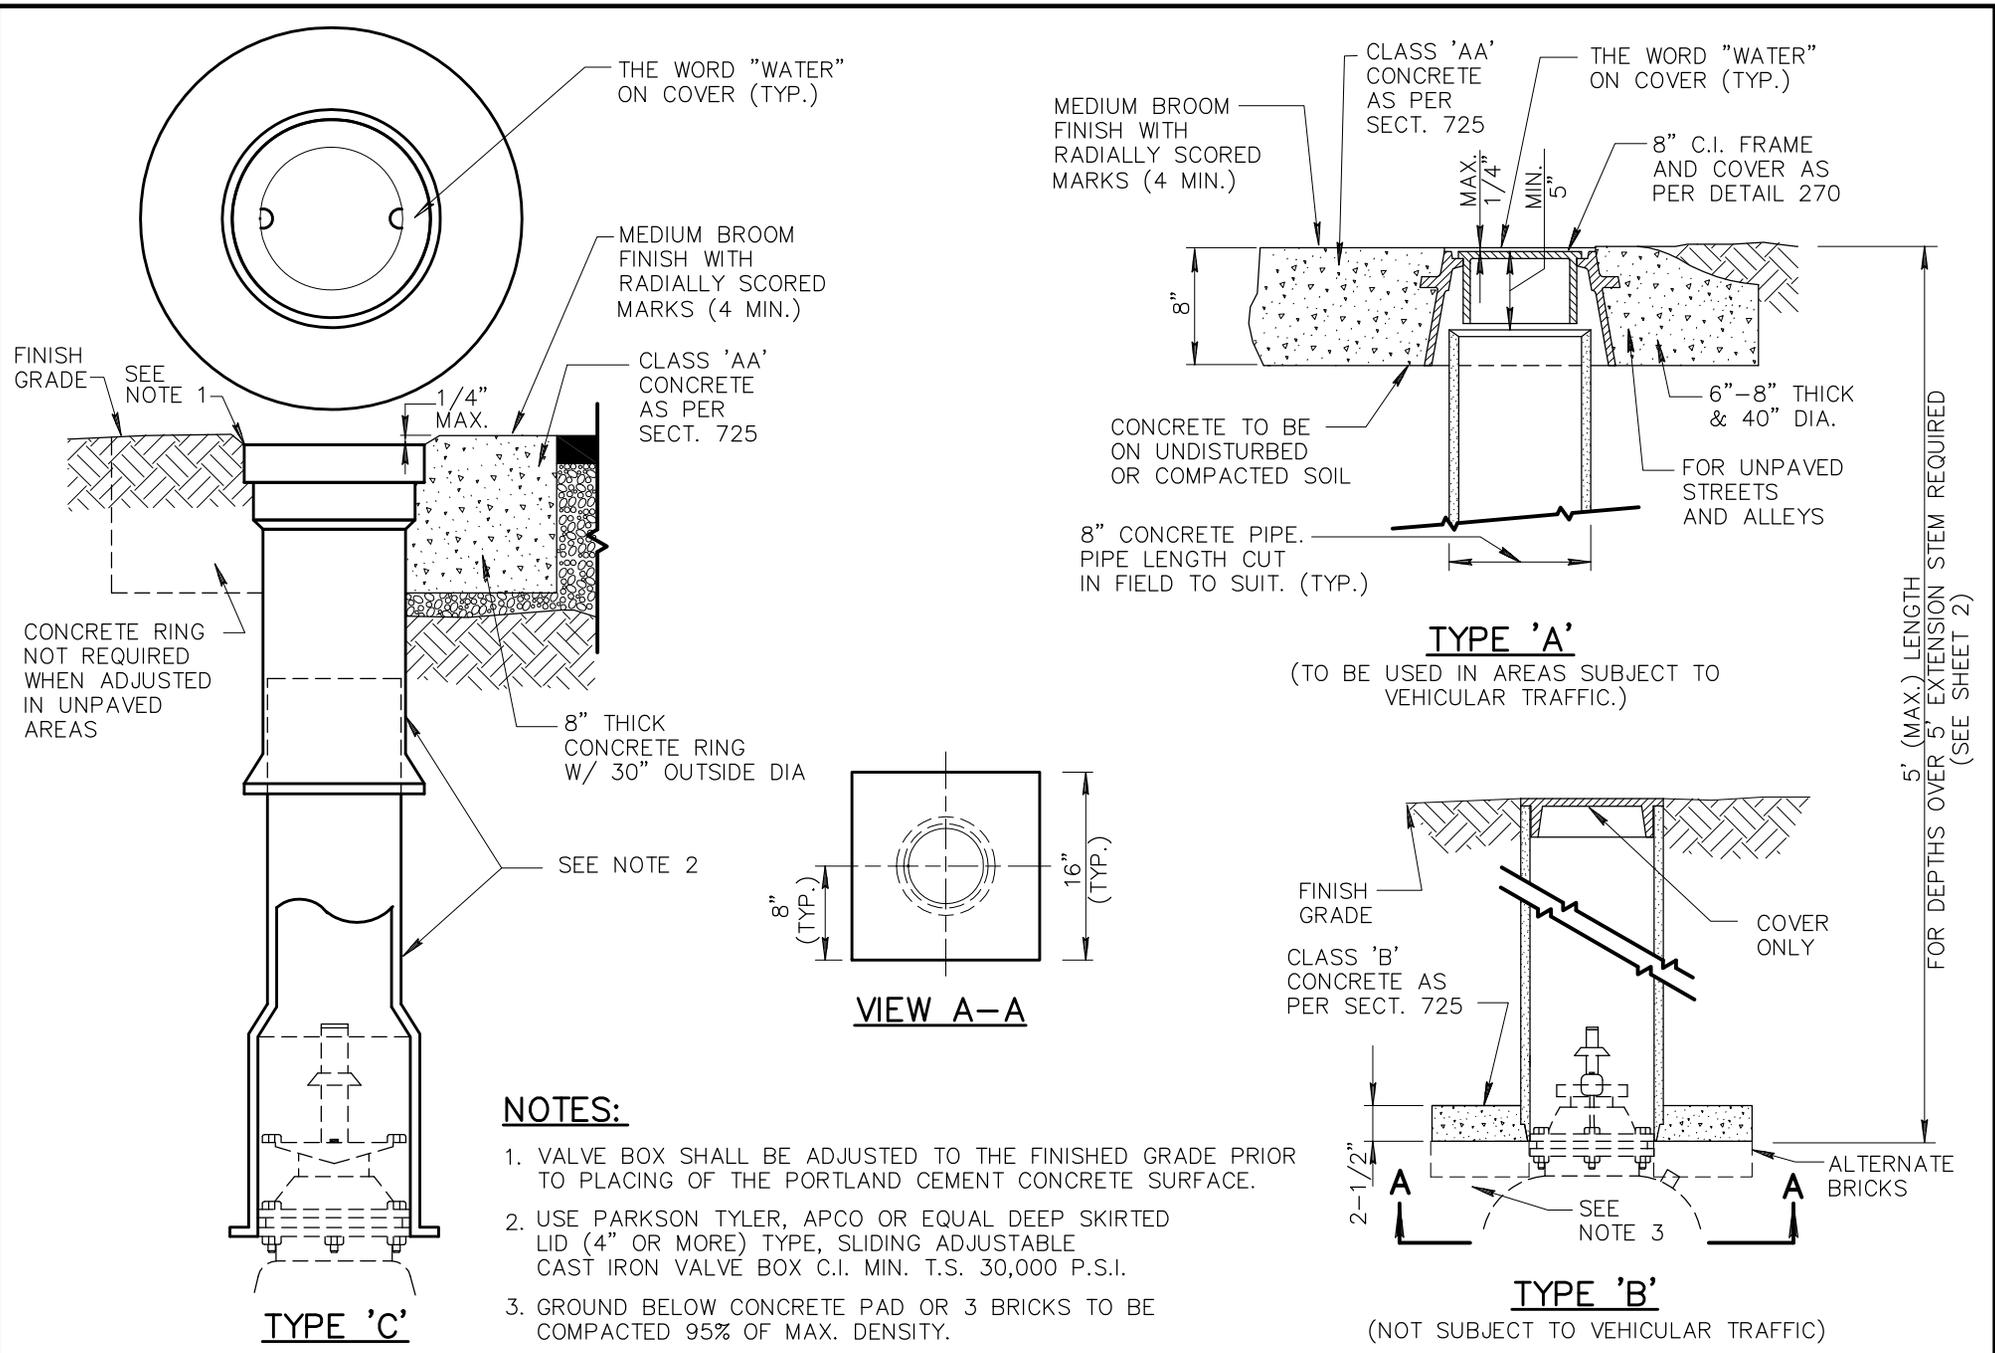

NOTES:

1. VALVE BOX SHALL BE ADJUSTED TO THE FINISHED GRADE PRIOR TO PLACING OF THE PORTLAND CEMENT CONCRETE SURFACE.
2. USE PARKSON TYLER, APCO OR EQUAL DEEP SKIRTED LID (4" OR MORE) TYPE, SLIDING ADJUSTABLE CAST IRON VALVE BOX C.I. MIN. T.S. 30,000 P.S.I.
3. GROUND BELOW CONCRETE PAD OR 3 BRICKS TO BE COMPACTED 95% OF MAX. DENSITY.

DETAIL NO.
391-1





STANDARD DETAIL
ENGLISH

**VALVE BOX INSTALLATION
AND GRADE ADJUSTMENT**

REVISED
01-01-2014

DETAIL NO.
391-1

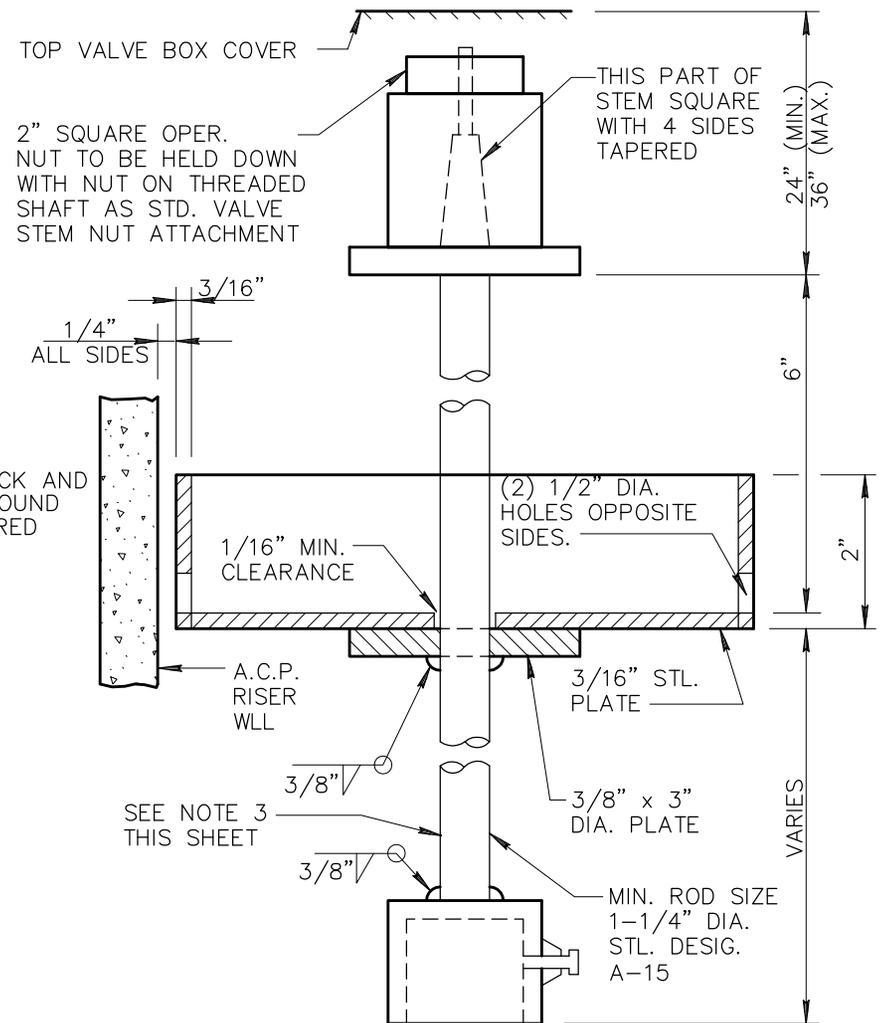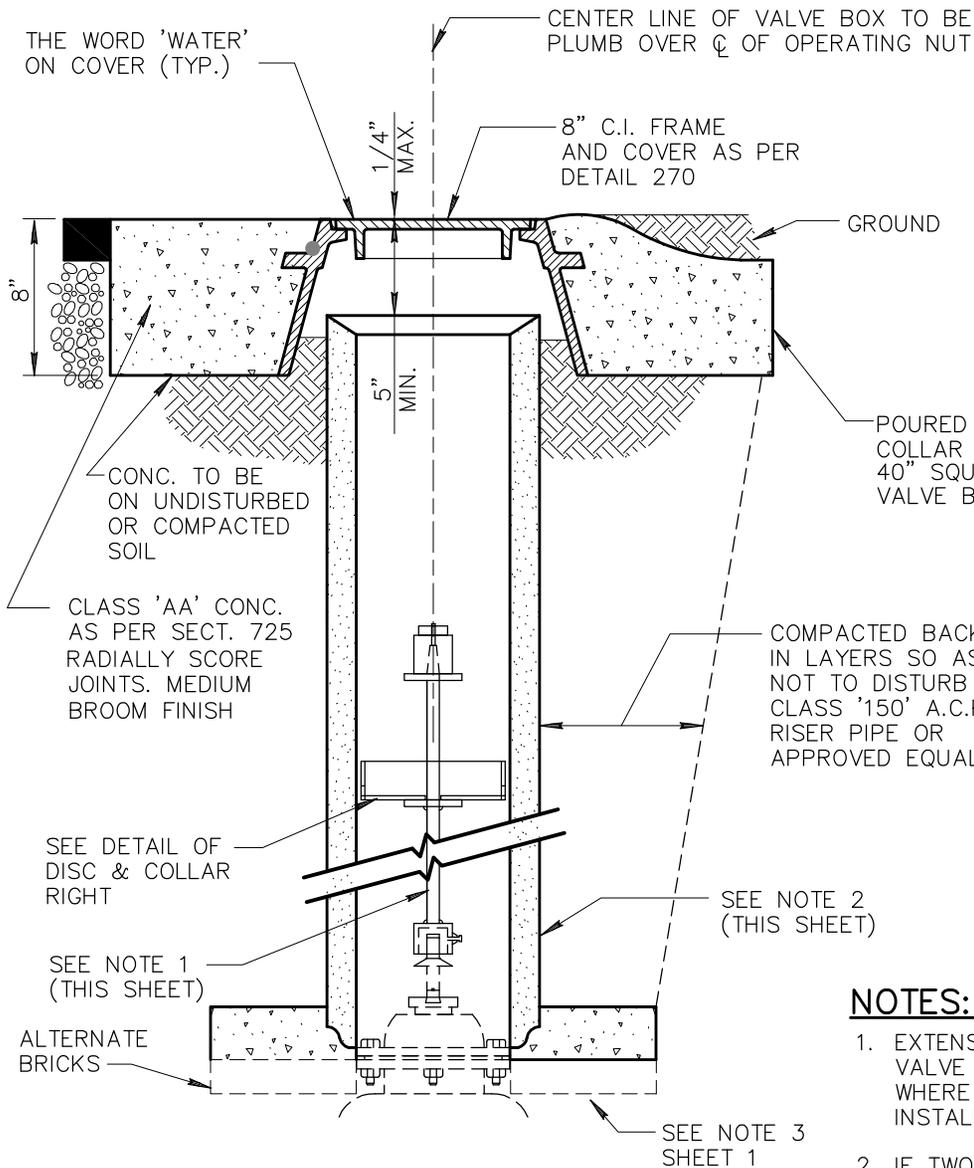

NOTES:

1. EXTENSION STEM: WITH SQUARE SOCKET ON BOTTOM TO FIT 2" SQUARE VALVE NUT. EXTENSION TO VALVE STEMS REQUIRED ON ALL VALVES INSTALLED WHERE OPERATING NUT IS OVER 5' BELOW SURFACE. LENGTH TO FIT EACH INSTALLATION. OPERATING NUT TO BE HELD ON TOP OF EXTENSION WITH STOP NUT.
2. IF TWO OR MORE JOINTS OF A.C.P. ARE USED TO MAKE RISER, USE STANDARD A.C. PIPE RUBBER GASKET COUPLING TO JOIN PIPE. WHERE RISER LENGTH EXCEEDS 10' USE 12" A.C. PIPE.
3. STEM PAINTING: ALL STEEL TO HAVE PRIME COAT OF PAINT NO. 1-D AND ONE HEAVY APPLICATION (FINISH COAT) OF PAINT NO. 9 AS PER SECT. 790.

DETAIL NO.
391-2




STANDARD DETAIL
ENGLISH

**VALVE BOX INSTALLATION
AND GRADE ADJUSTMENT**


REVISED
01-01-2001

DETAIL NO.
391-2


VALVE BOX AND COVER
FOR DETAIL 391-1,
TYPE A

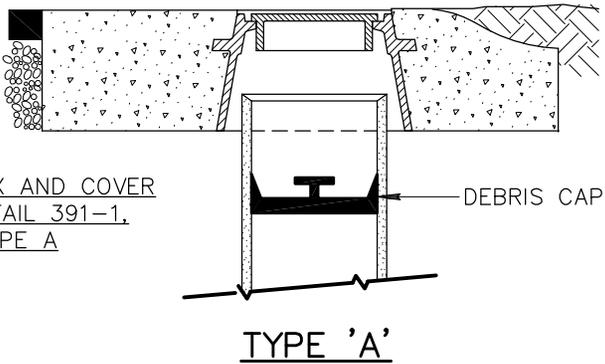

VALVE BOX AND COVER
FOR DETAIL 391-1,
TYPE B


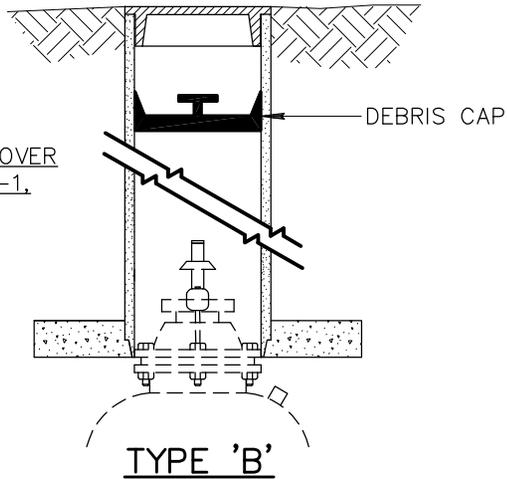


VALVE BOX AND COVER
FOR DETAIL 391-1,
TYPE C

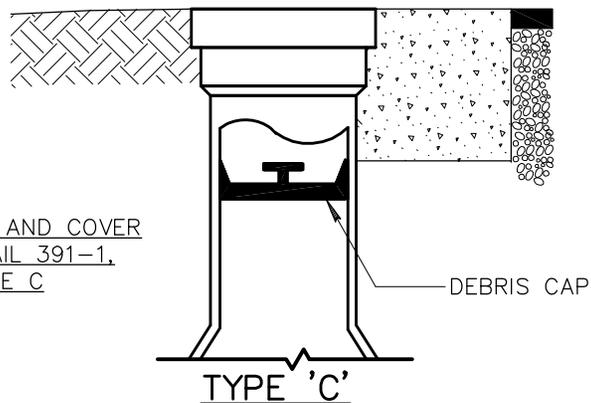


NOTES:


1. THE DEBRIS CAP SHALL BE DESIGNED AND INSTALLED TO PREVENT DEBRIS SUCH AS DIRT, DUST SAND, ETC., FROM PASSING AROUND THE CAP AND DOWN INTO THE VALVE HOUSING. THE CAP SHALL BE HELD IN PLACE BY A MECHANISM WHICH WILL NOT DAMAGE THE VALVE HOUSING. ONCE INSTALLED THE CAP MUST WITHSTAND, WITHOUT SLIPAGE, A MINIMUM VERTICAL FORCE OF 50 POUNDS AT A LOADING RATE OF 1 INCH/MINUTE.
2. THE CAP SHALL BE MANUFACTURED OF CORROSIVE RESISTANT MATERIALS.
3. DEBRIS CAP SHALL BE INSTALLED AS CLOSE UNDER THE CAST IRON COVER WITHOUT INTERFERING WITH COVER OPERATION.
4. THE CAP SHALL BE CAPABLE OF SECURELY HOLDING A STANDARD LOCATING COIL, "SCOTCH MARK" 4 DISK MARKER BY 3M OR EQUAL.
5. THE CAP SHALL BE CONSTRUCTED TO ALLOW THE DEVICE TO BE SECURED BY A LOCK. THE LOCK (PAD, BARREL, ETC.) SHALL BE SUPPLIED BY THE AGENCY.
6. THE HANDLE AND/OR BODY OF THE CAP SHALL BE INTEGRALLY COLORED IF REQUIRED BY THE AGENCY. IF REQUIRED, THE COLOR SHALL CONFORM TO THE ONE CALL LOCATING SERVICE (BLUE STAKE) COLORS (ARS 40-360.21).
7. THE CAP SHALL BE INSTALLED IN ALL VALVE HOUSINGS AS REQUIRED BY THE CONTRACT DOCUMENTS OR BY THE AGENCY'S POLICIES.
8. THE DEBRIS CAP SHALL BE MANUFACTURED BY SW SERVICES, INC. PHOENIX, ARIZONA OR EQUAL.

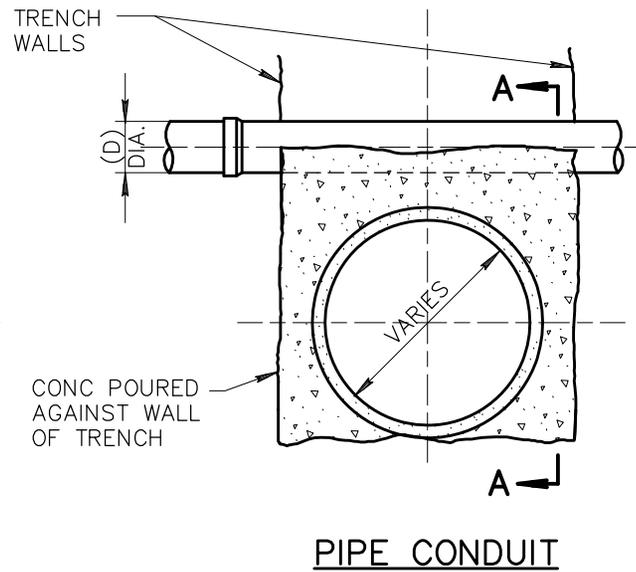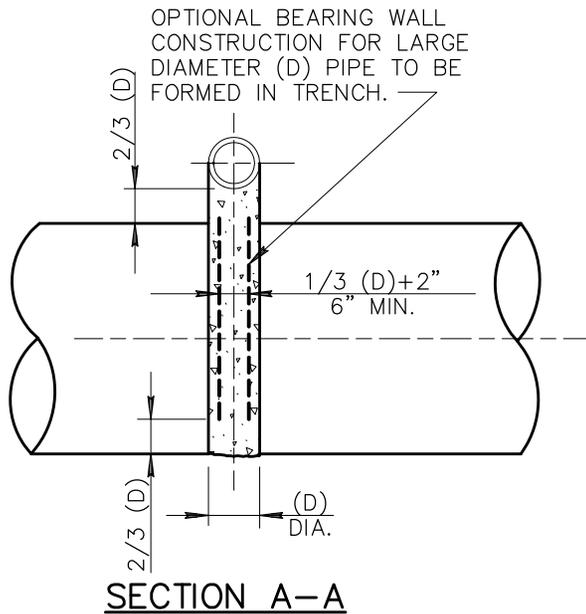

TYPE 'A'



SEE SECT. 601 FOR BACKFILL & COMPACTION

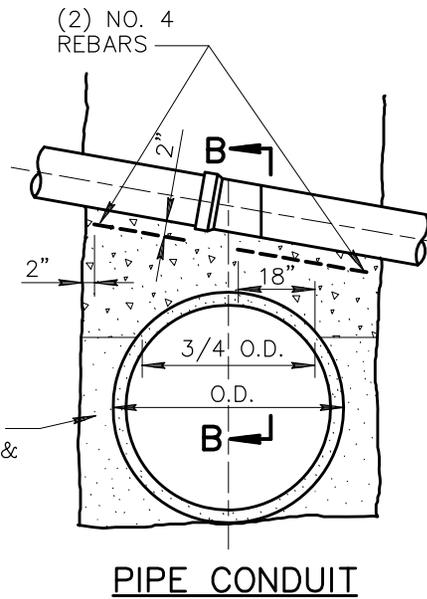






TYPE 'B'


NOTES:

1. TYPE 'A' PIPE SUPPORT MAY BE USED FOR ANY TYPE CROSSING CONDITION.
2. TYPE 'C' PIPE SUPPORT MAY BE USED FOR CROSSING PIPES WITH A BELL DIAMETER OF 18" OR LESS IF SUFFICIENT CLEARANCE OVER STORM SEWER IS AVAILABLE AND TOTAL SPAN IS LESS THAN 34'
3. INTERMEDIATE PIPE SUPPORT SHALL BE USED IN CONJUNCTION WITH TYPE 'C' PIPE SUPPORT IF TOTAL SPAN EXCEEDS MAX. 'W' IN TABLE.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING ALL SUPPORTS BOTH PERMANENT AND TEMPORARY. TEMPORARY SUPPORTS SHALL NOT BE A SEPARATE PAY ITEM.
5. PERMANENT PIPE SUPPORTS MAY BE DECREASED FROM PLAN QUANTITIES OR EXTENDED TO INCLUDE SOME LISTED BELOW AS TEMPORARY SUPPORTS IF CONDITIONS WARRANT THESE CHANGES AT THE TIME OF CONSTRUCTION. DECISION SHALL BE MADE BY THE ENGINEER.
6. WHEN TYPE 'A' PIPE SUPPORT IS USED AND WHENEVER SO DIRECTED BY THE ENGINEER, THE CONTRACTOR SHALL PIERCE THE WALL WITH SUITABLE OPENINGS TO PREVENT UNEQUAL PRESSURE RESULTING FROM FLOODING OF THE BACKFILL. THE VOLUME OF THE PIERCED OPENING SHALL NOT EXCEED 1/2 THE VOLUME OF THE SUPPORTING WALL.
7. USE TYPE 'B' PIPE SUPPORT INSTEAD OF TYPE 'C' WHEN CLEARANCE IS LESS THAN 'Y' IN TABLE, BETWEEN PIPES.
8. CLASS 'A' CONCRETE AS PER SECT. 725 UNLESS OTHERWISE NOTED.

SCHEDULE OF REQUIRED SUPPORTS	
PERMANENT	TEMPORARY
SEWER LINES	CAST IRON PIPE CONC. IRRIG. PIPE BURIED TELCO. GAS PIPES CONC. STORM DRAIN CONC. BOX CULVERT TRAFFIC CONTROL CONDUIT WATER & SEWER LINES
OTHER UTILITIES AS NOTED ON THE PLANS OR AS REQUIRED BY THE ENGINEER AT TIME OF CONSTRUCTION.	

TABLE				
'W'	DEPTH OF COVER ON SUPPORTS			
	0' TO 8'		8' TO 16'	
	BAR NO.	Y	BAR NO.	Y
TO 6'	5	8"	6	11"
7'	5	9"	6	12"
8'	5	10"	6	13"
9'	6	11"	6	14"
10'	6	12"	7	15"
11'	6	13"	7	16"
12'	6	14"	7	17"
13'	7	15"	7	19"
14'	7	16"	8	20"
15'	7	17"	8	21"
16'	7	18"		
17'	8	19"		

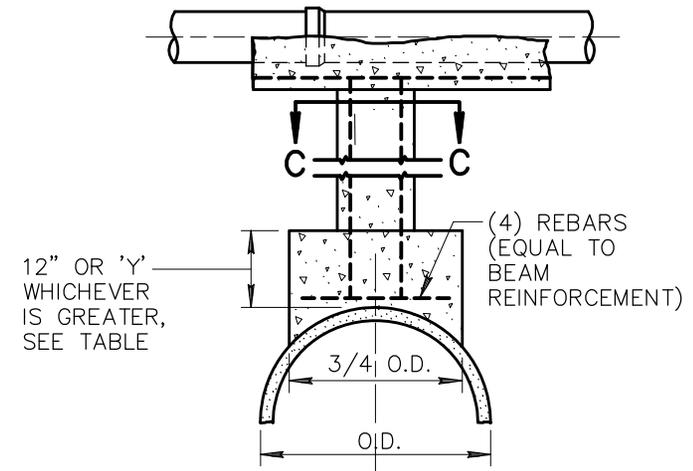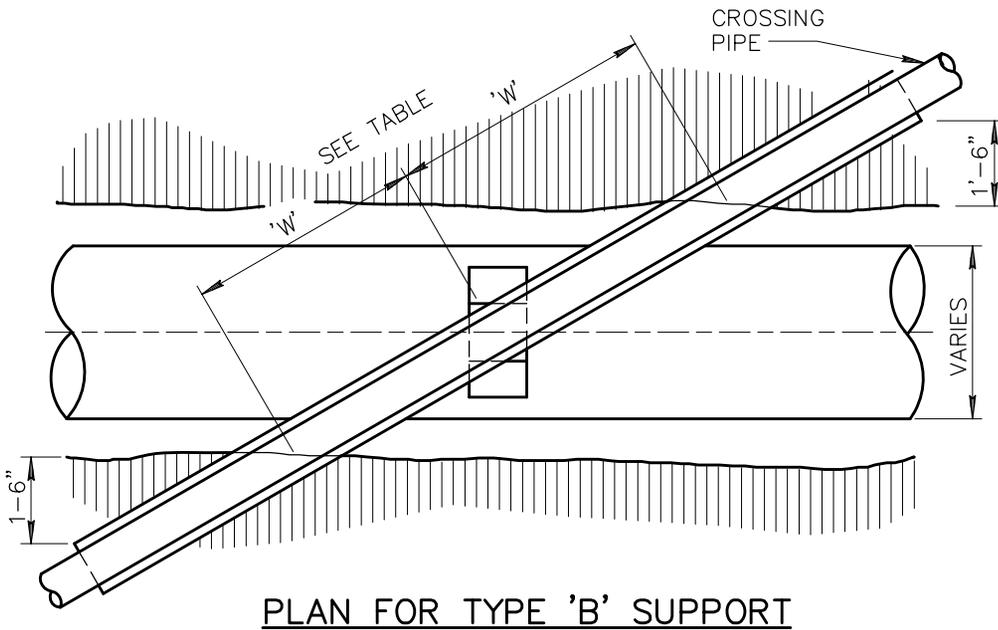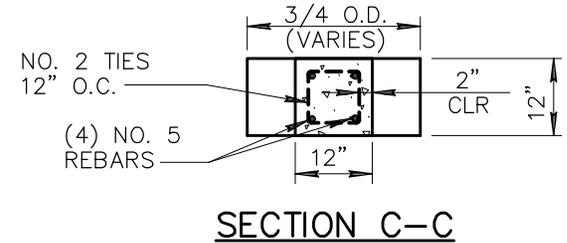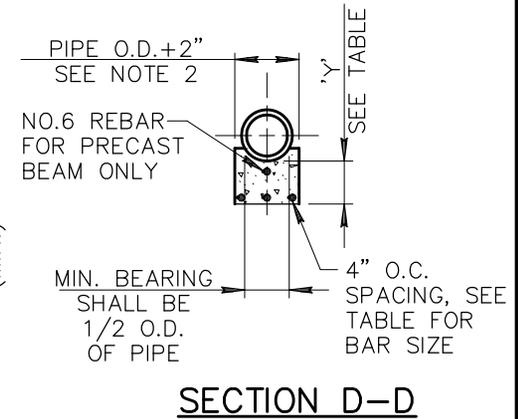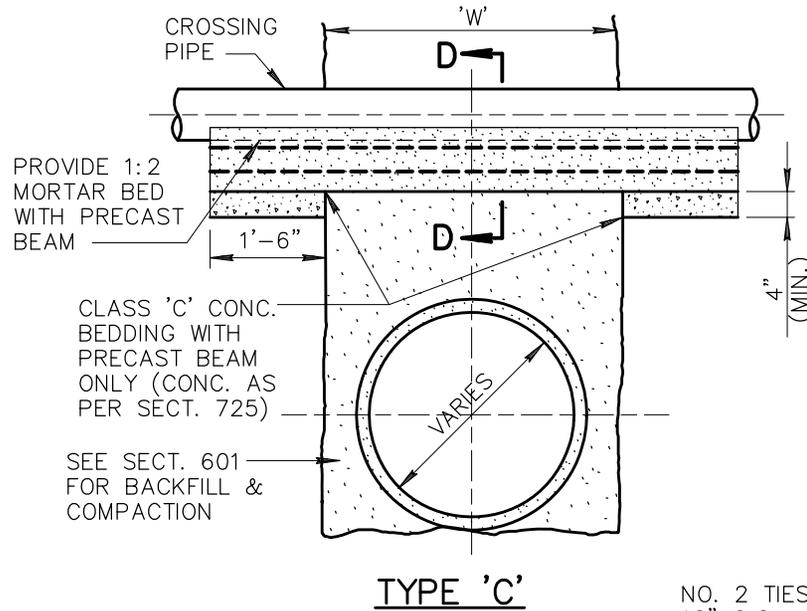

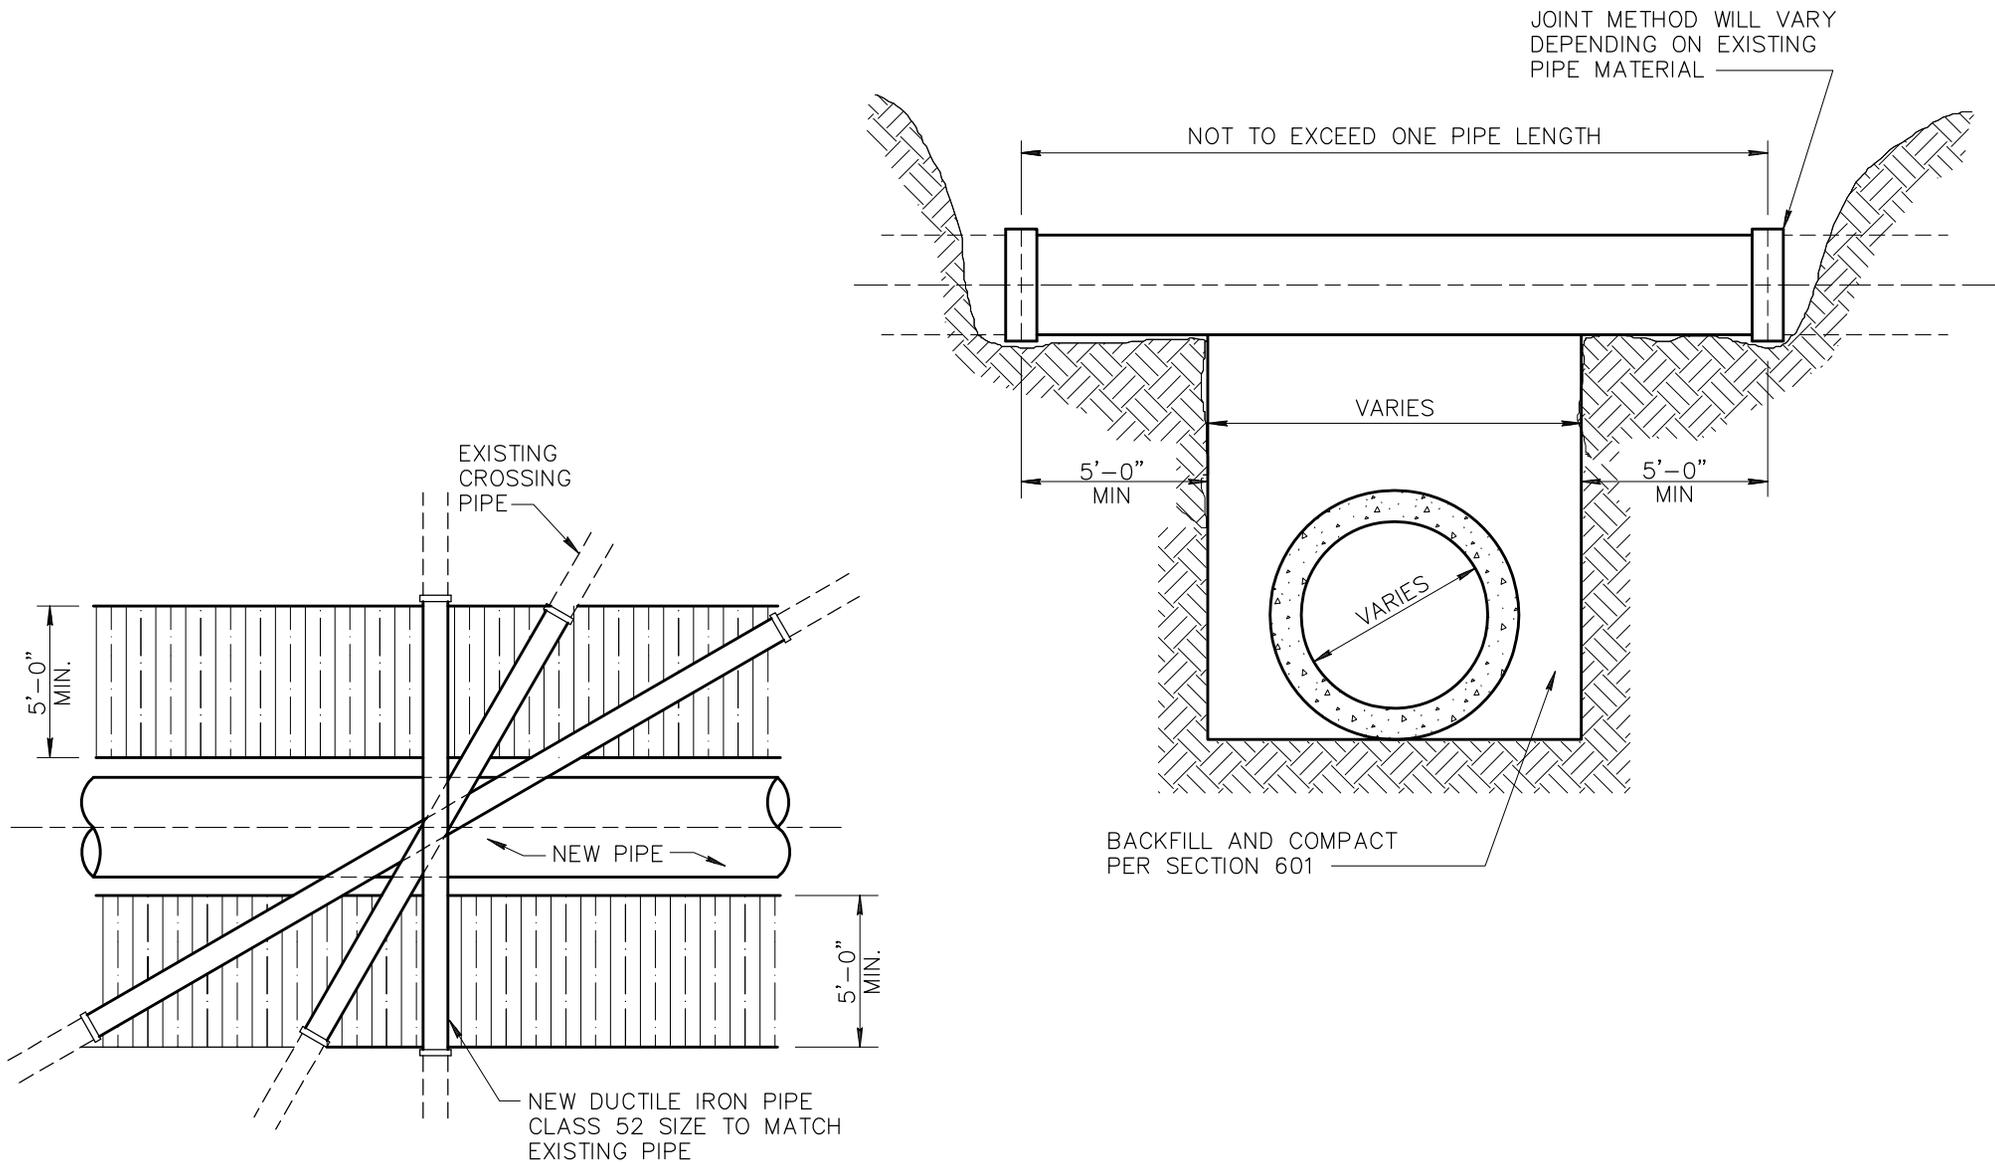

DETAIL NO.
403-3



STANDARD DETAIL
ENGLISH


ALTERNATE TO PIPE SUPPORT

REVISED
01-01-1998


DETAIL NO.
403-3

WATER LINE EXCLUSION AND EXTRA PROTECTION ZONES*

GRAVITY SANITARY SEWER

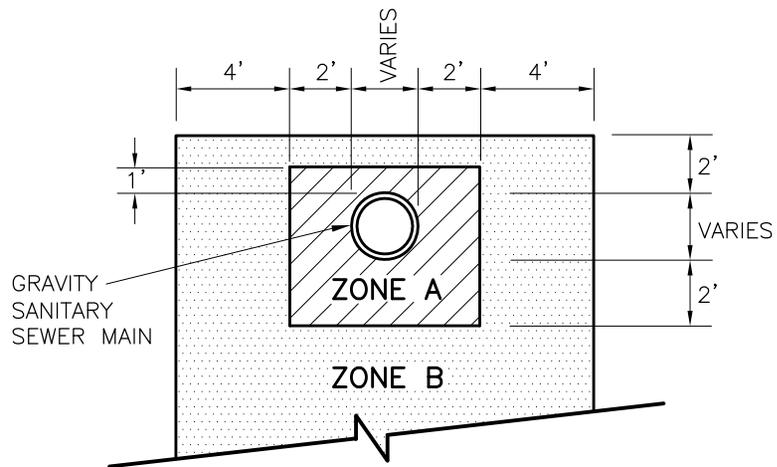


PRESSURIZED SANITARY SEWER

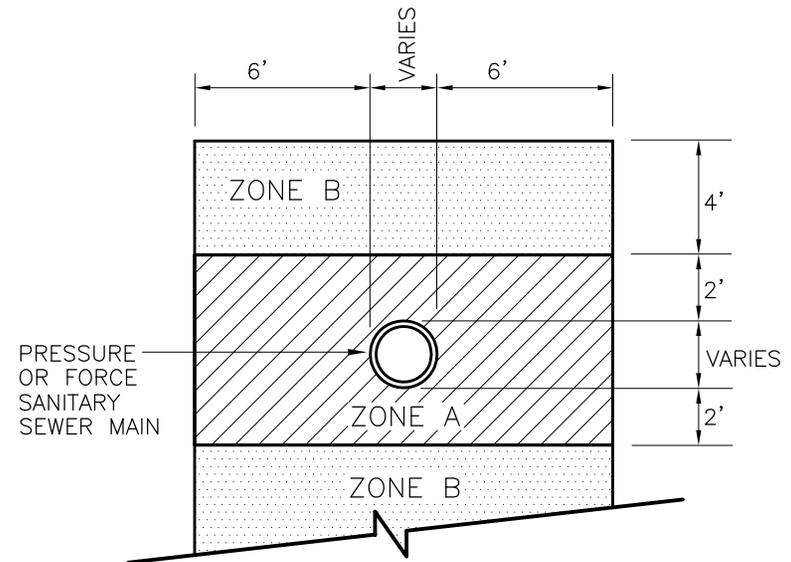

NOTES:

- ZONE A: NO WATER LINES ALLOWED/MINIMUM SEPARATION.
- ZONE B: EXTRA PROTECTION REQUIRED FOR WATER LINES.
- * REFER TO STANDARD 610, WATER LINE CONSTRUCTION.

WATER LINE EXTRA PROTECTION
DUCTILE IRON PIPE WITH RESTRAINED OR MECHANICAL JOINTS*

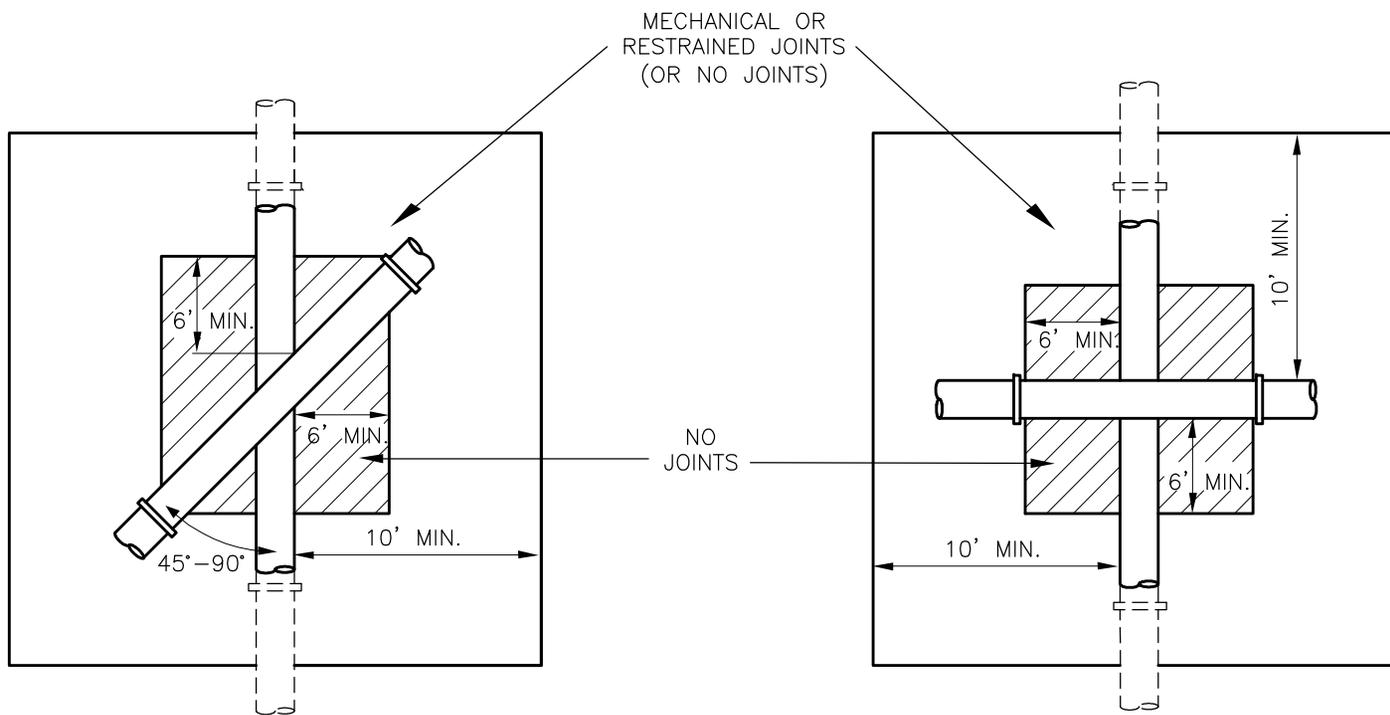

EXTRA PROTECTION DUCTILE IRON PIPE
(GRAVITY OR PRESSURIZED) SEWER LINE

NOTES:

* REFER TO MAG STANDARD SPECIFICATION SECTION 610.

DETAIL NO.

404-2



STANDARD DETAIL
 ENGLISH

**WATER AND SANITARY SEWER
 SEPARATION/PROTECTION**


REVISED

01-01-2006

DETAIL NO.


404-2

ENCASEMENT FOR PIPE CROSSING*

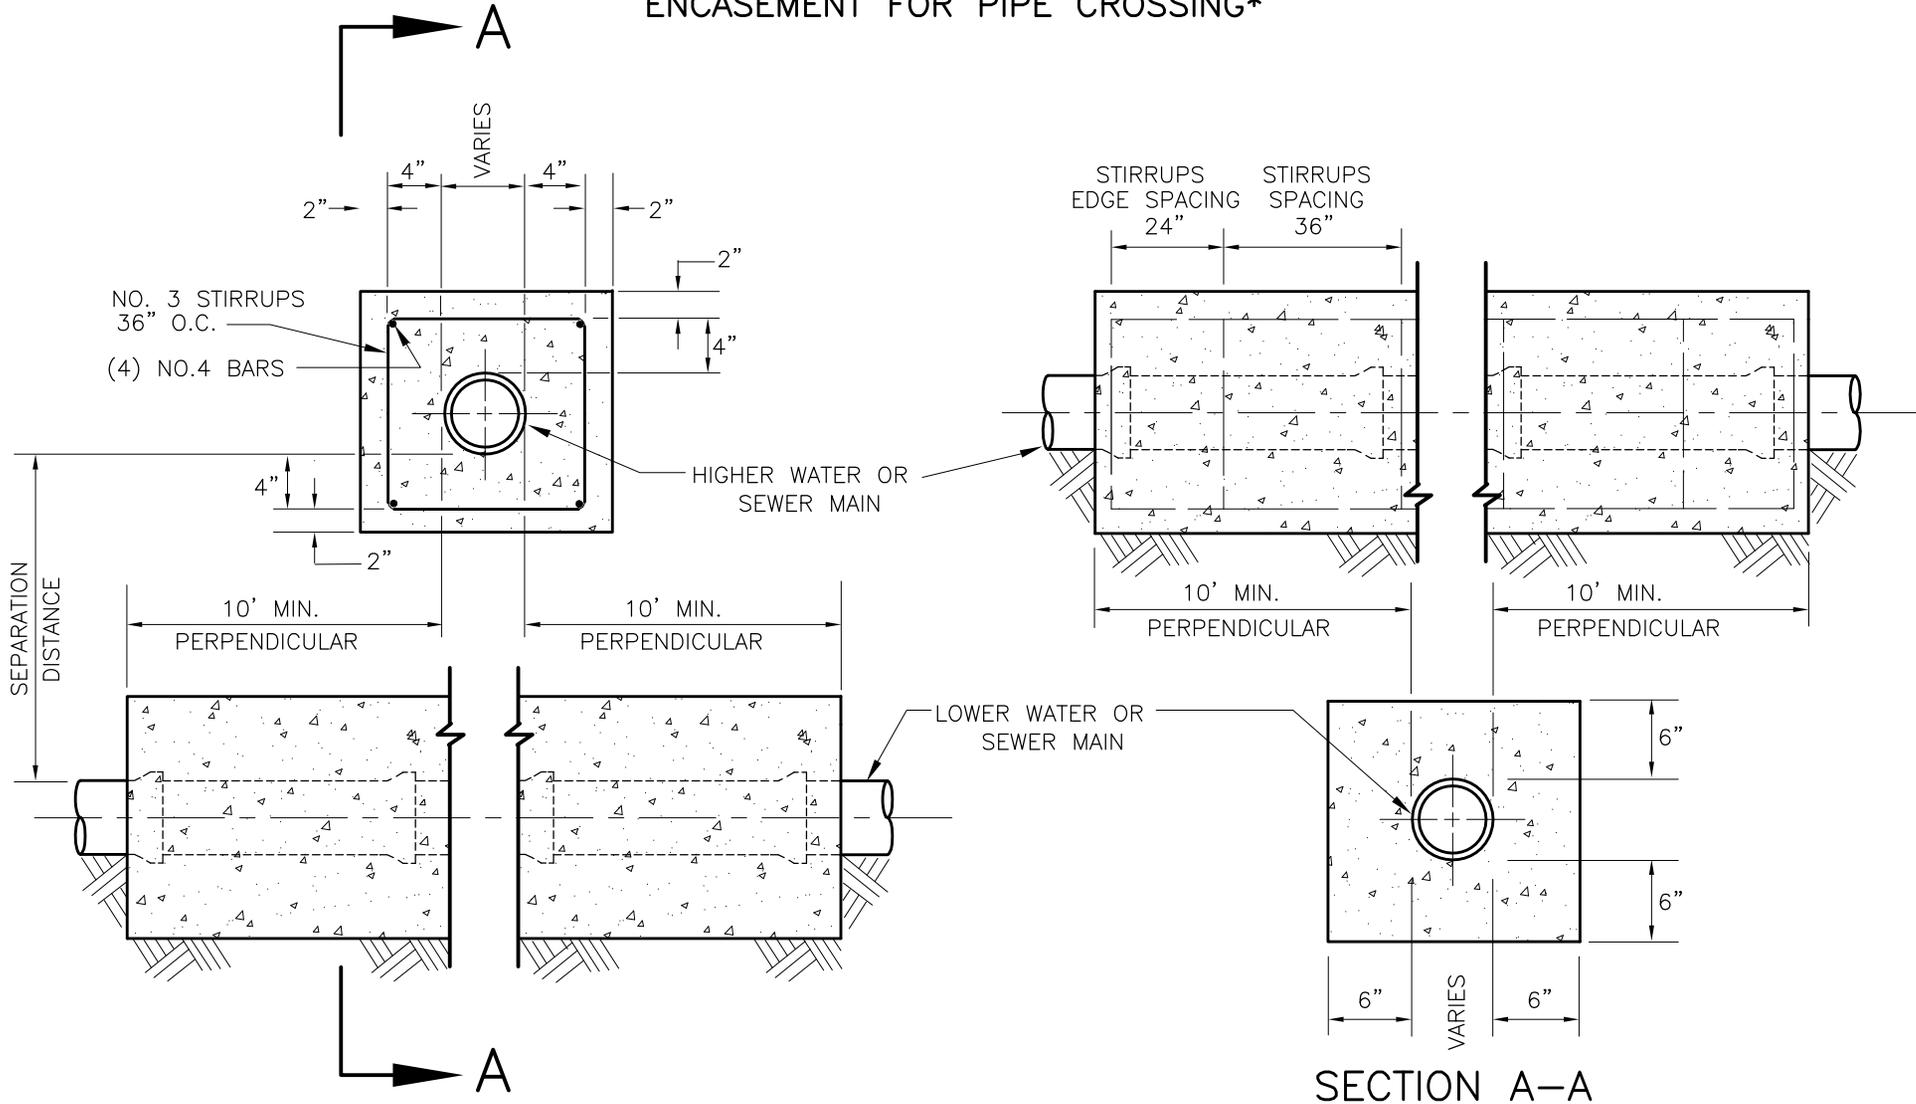


SECTION A-A


- NOTES:**
1. CLASS 'C' CONCRETE AS PER SECTION 725.
 - *REFER TO MAG STANDARD SPECIFICATION SECTION 610.

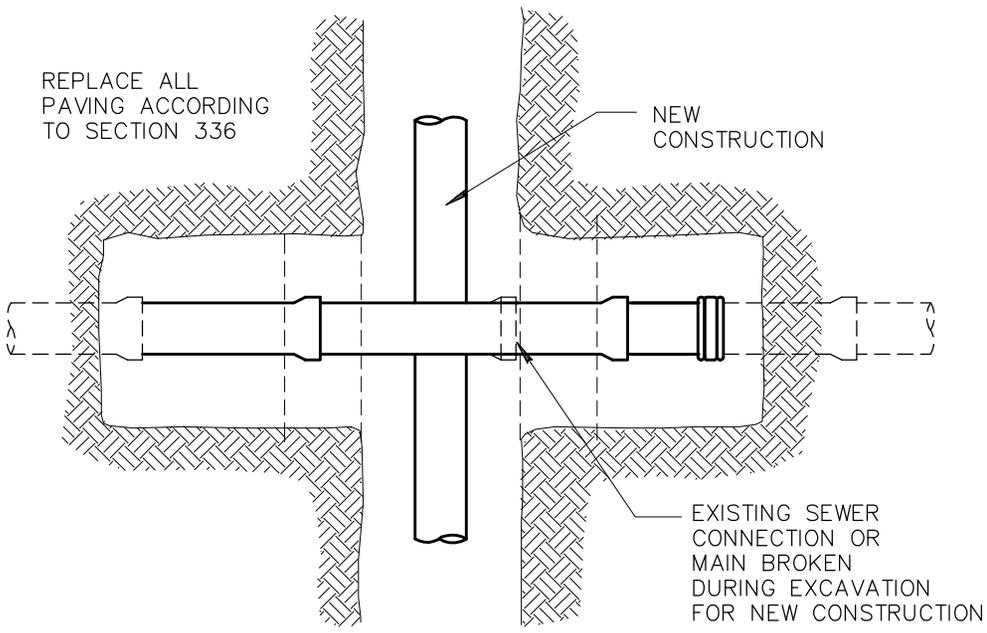


PLAN VIEW OF REPLACEMENT

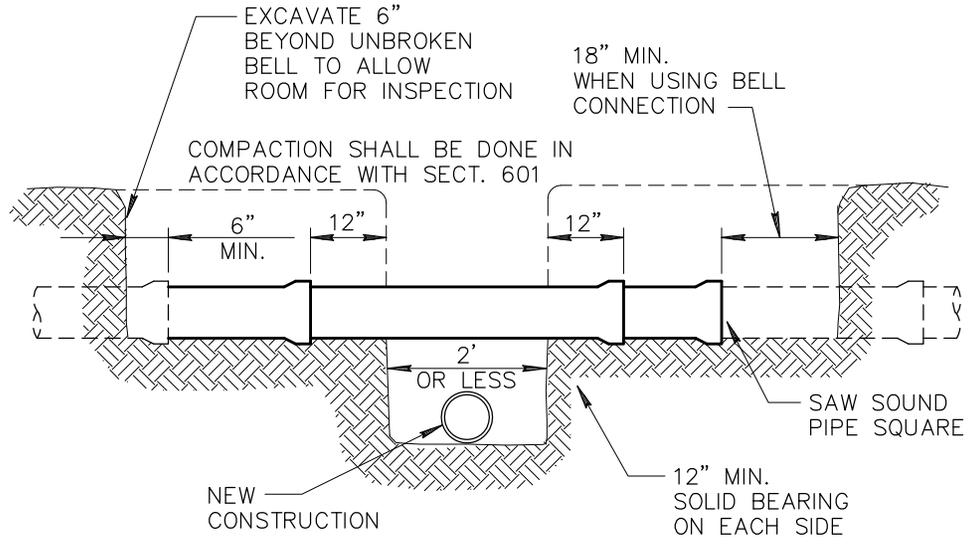

REPLACEMENT WHEN NEW TRENCH 2' WIDE OR LESS

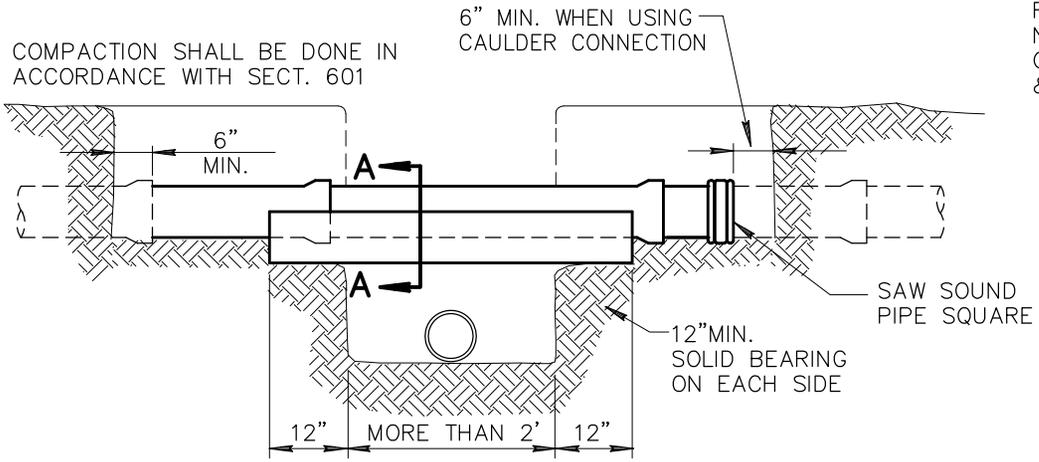


REPLACEMENT WHEN NEW TRENCH MORE THAN 2' WIDE

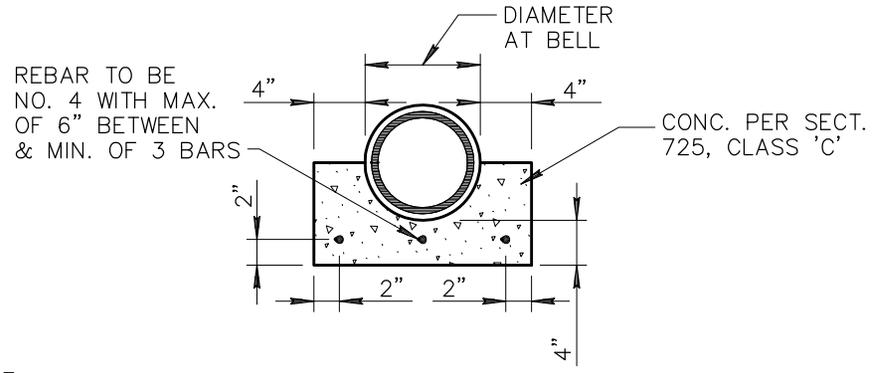

SECTION 'A-A'

NOTES:


1. BROKEN PIPE SHALL BE REPLACED WITH A MINIMUM OF ONE FULL JOINT AND TWO SHORT LENGTHS WITH UNBROKEN BELLS. CONSTRUCTION AND JOINTS TO BE MADE AS PER SECTION 615.

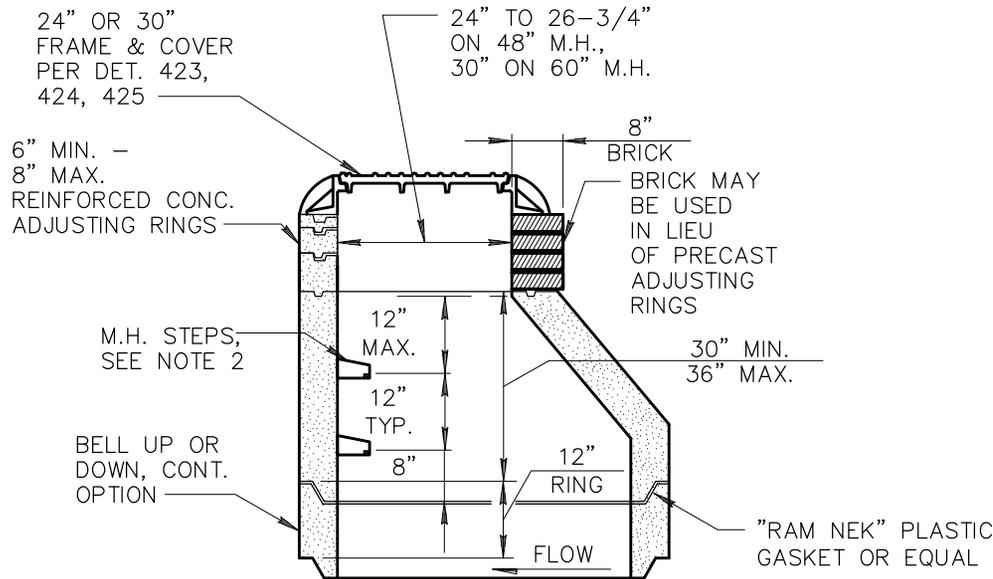

TYPE 'A' TOP

(PRE-CAST ECCENTRIC CONICAL TOP M.H.)

** ALTERNATE BASE WITH KNOCKOUTS FOR PIPES. CLEARANCE AROUND PIPES 1" MIN. - 3" MAX. EXCEPT LOWER CORNERS

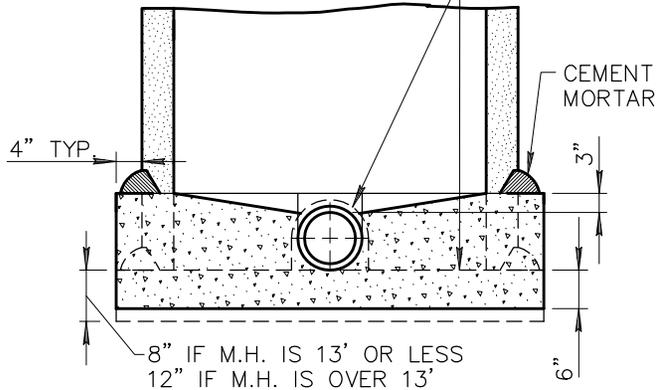

NOTES:

1. PRE-CAST, REINFORCED M.H. SECTIONS SHALL BE MANUFACTURED IN ACCORDANCE WITH A.S.T.M. C-478 EXCEPT AS MODIFIED HEREIN.
2. M.H. STEPS SHALL BE INSTALLED AT SITE OF M.H. SECTION MANUFACTURE. MINIMUM CLEARANCE EACH SIDE OF M.H. LEG SHALL BE 1". STEPS SHALL BE MOUNTED WITH 2 TO 1 SAND/CEMENT DRY PACK MORTAR. (SEE DET. 428 FOR M.H. STEP.) STEPS REQUIRED IN 48" DIAMETER MANHOLE. STEPS NOT REQUIRED IN 60" DIAMETER MANHOLE.
3. USE LOW ALKALI CEMENT ONLY.

DETAIL NO.

420-1



STANDARD DETAIL
ENGLISH

PRE-CAST CONCRETE SEWER MANHOLE





REVISED

01-01-2004

DETAIL NO.

420-1

FOR INSTALLATION
IN PVM'T. SEE
DETAIL 422

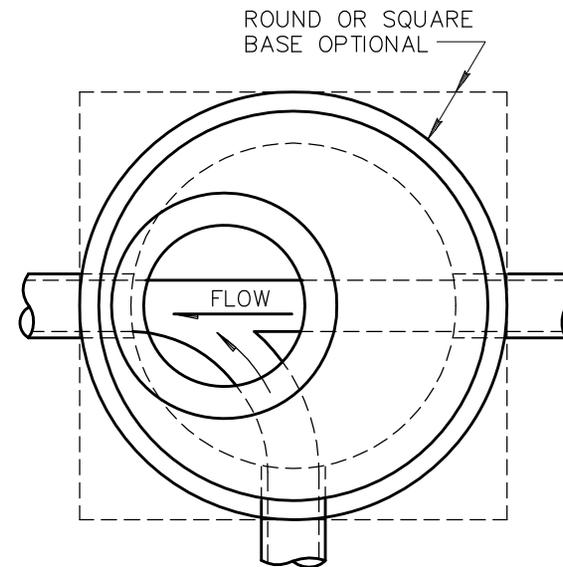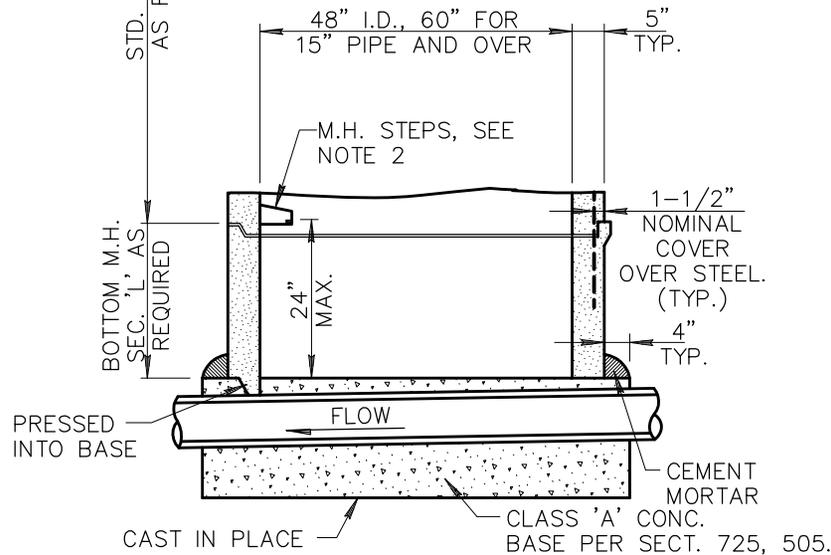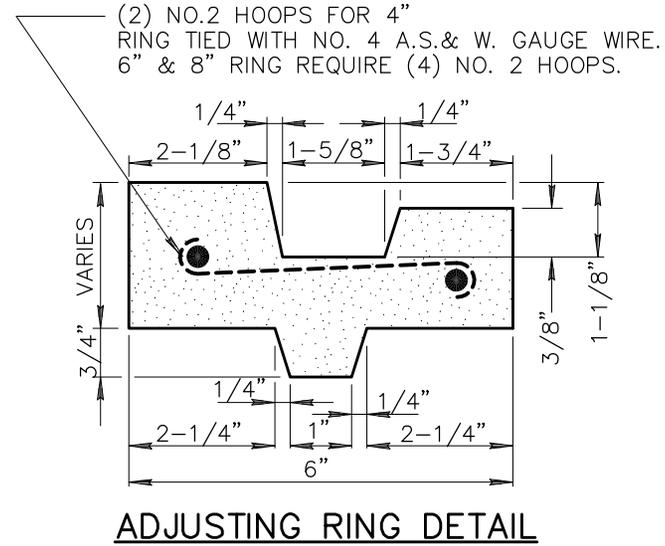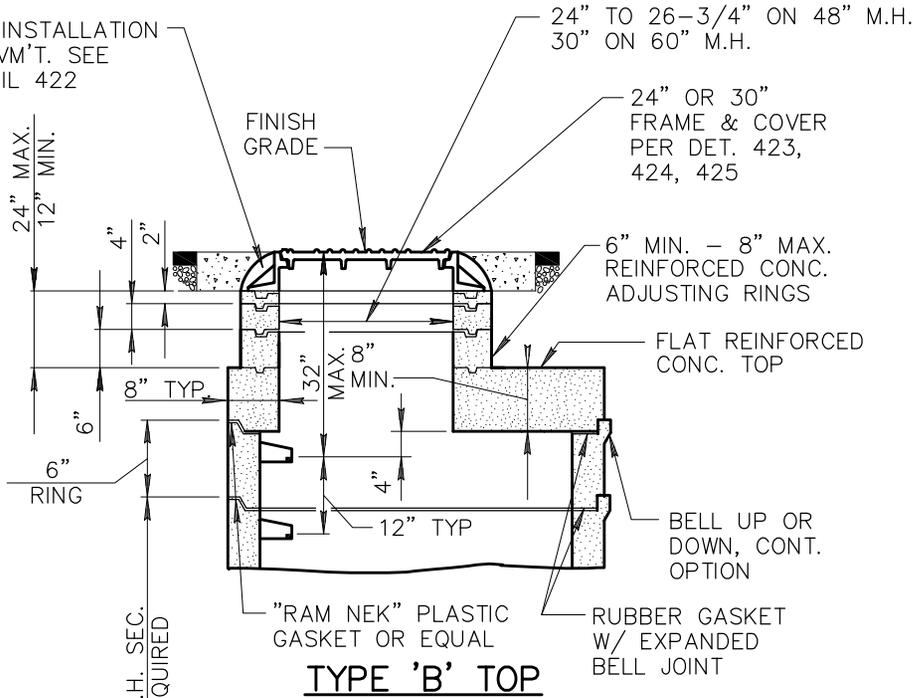

DETAIL NO.
420-2




STANDARD DETAIL
ENGLISH

PRE-CAST CONCRETE SEWER MANHOLE

REVISED
01-01-2001

DETAIL NO.
420-2

PIPE SIZE & ELEVATION
AS SHOWN ON PLANS

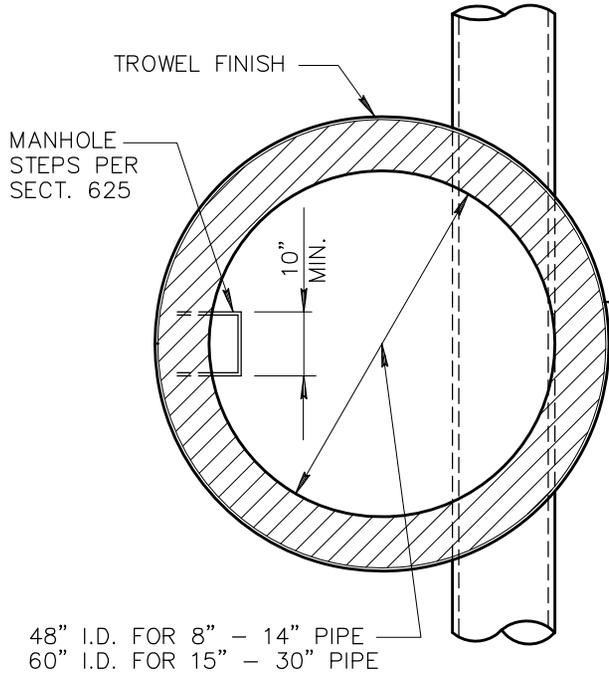


48" I.D. FOR 8" - 14" PIPE
60" I.D. FOR 15" - 30" PIPE

MANHOLE TO BE
BRICK OR PRECAST
PER SECT. 625
BRICK SHALL BE
IN ACCORDANCE
WITH SECT. 775

1:3 CEMENT MORTAR COAT
OUTSIDE OF MORTAR WITH
MEMBRANE TYPE CURING
COMPOUND IMMEDIATELY
AFTER PLASTER HAS BEEN
PLACED & FINISHED, "HUNT
PROCESS" OR EQUAL

COURSE BRICK IN MORTAR
OR CLASS 'C' CONCRETE
PER SECT. 725, 505

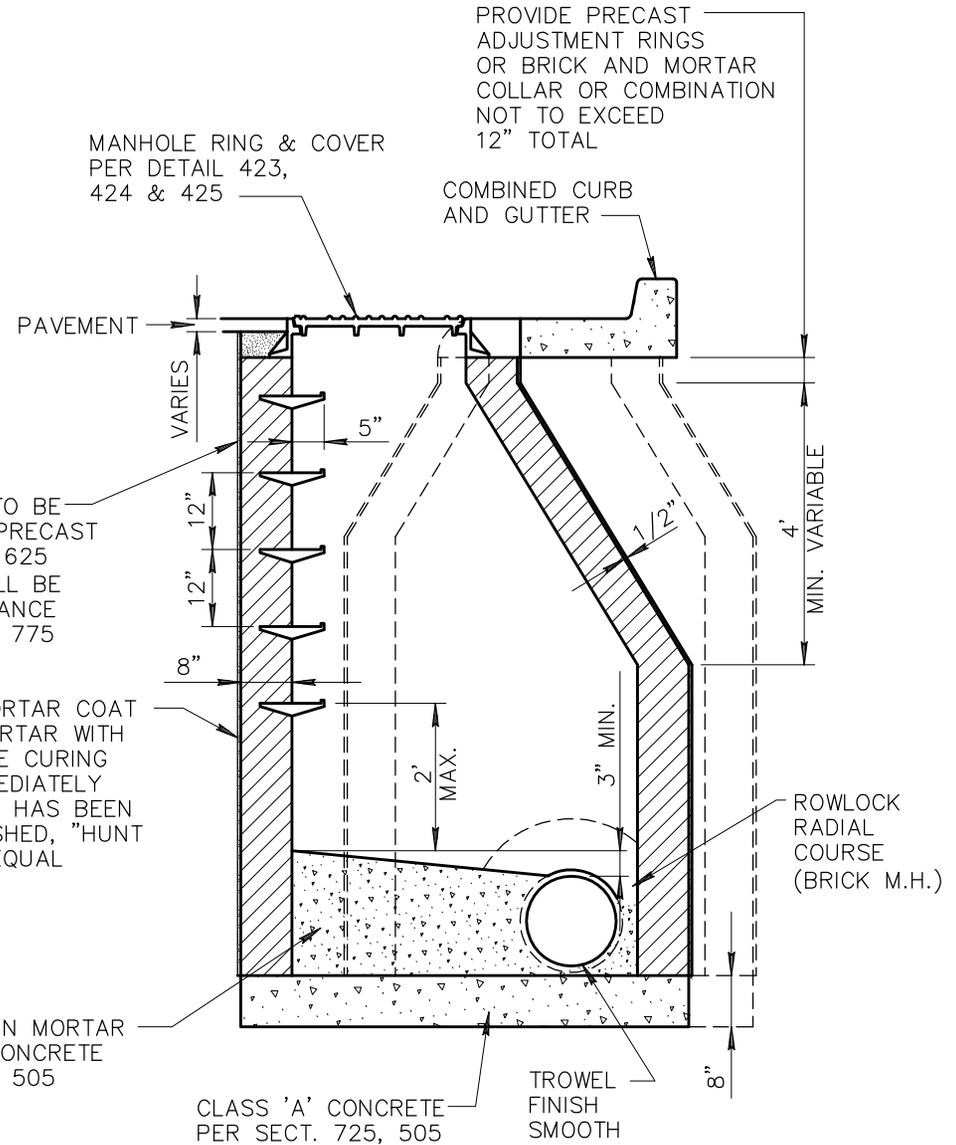

PROVIDE PRECAST
ADJUSTMENT RINGS
OR BRICK AND MORTAR
COLLAR OR COMBINATION
NOT TO EXCEED
12" TOTAL

MANHOLE RING & COVER
PER DETAIL 423,
424 & 425

COMBINED CURB
AND GUTTER

PAVEMENT

VARIES

5"

12"

12"

8"

2' MAX.

3" MIN.

4' MIN. VARIABLE

ROWLOCK
RADIAL
COURSE
(BRICK M.H.)

TROWEL
FINISH
SMOOTH

8"

CLASS 'A' CONCRETE
PER SECT. 725, 505

8"

8"

8"

8"

8"

DETAIL NO.

421



STANDARD DETAIL
ENGLISH

OFFSET MANHOLE 8" TO 30" PIPE

REVISED


01-01-2012

DETAIL NO.

421


M.H. FRAME AND COVER PER SECT. 625

FOUR STEEL SPACERS, 4"x2" THICKNESS AS REQUIRED FROM 1/2" to 2" WHEN THICKNESS IS LESS THAN 1/2" USE MORTAR, WHEN GREATER THAN 1/2", USE BRICK.

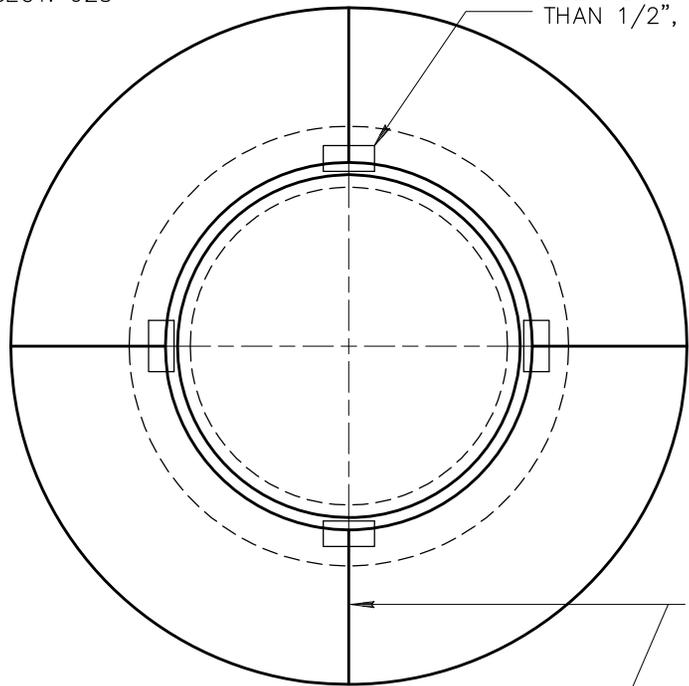

MEDIUM BROOM FINISH WITH RADIALLY SCORED MARKS (4 MIN.)


EXISTING OR RECENTLY INSTALLED PAVEMENT

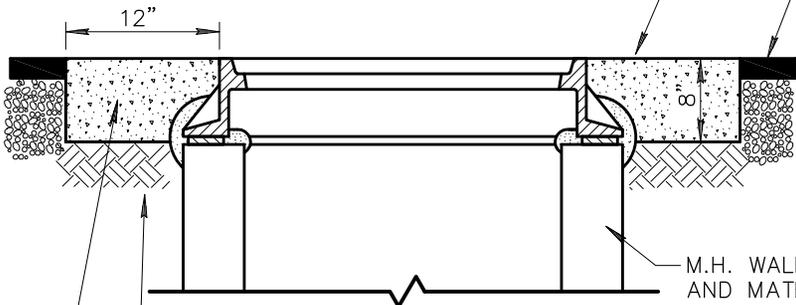

M.H. WALL THICKNESS AND MATERIAL VARIES


SUBGRADE PREPARATION TO CONFORM TO SECT. 301 OR 601

CLASS 'AA' CONCRETE AS PER SECT. 725, 505

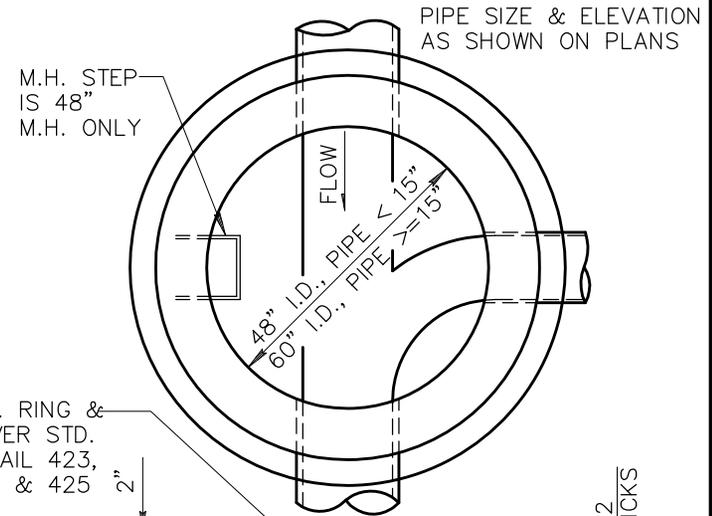

M.H. STEP IS 48" M.H. ONLY

M.H. RING & COVER STD. DETAIL 423, 424 & 425

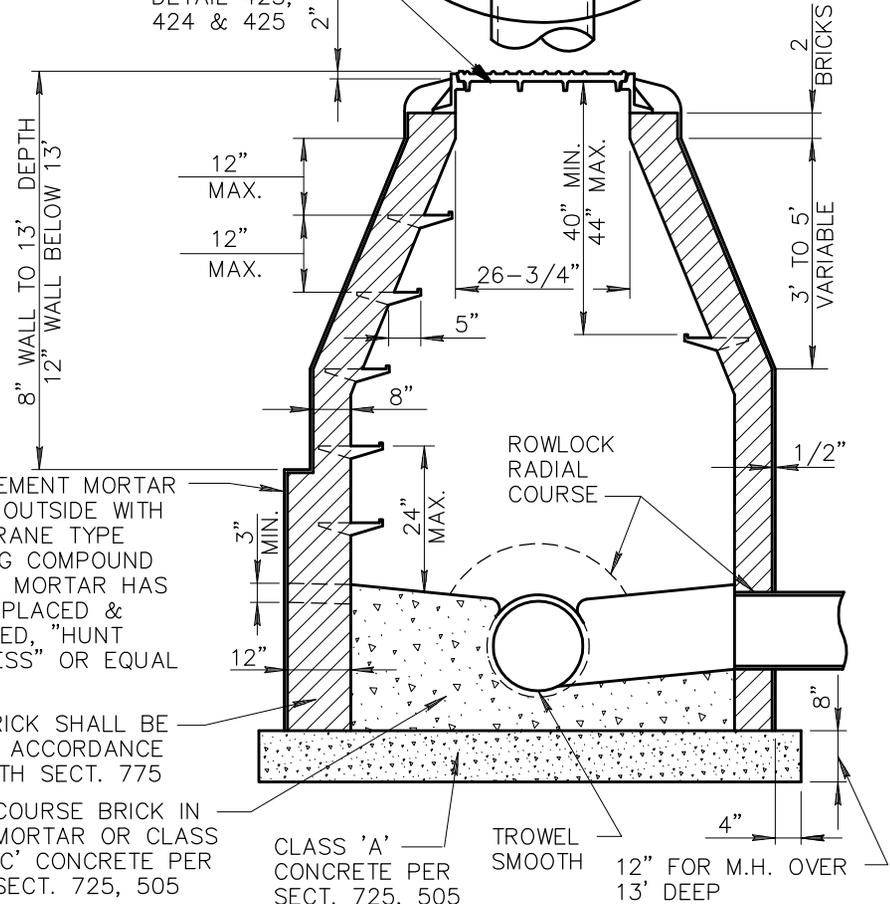

1:3 CEMENT MORTAR COAT OUTSIDE WITH MEMBRANE TYPE CURING COMPOUND AFTER MORTAR HAS BEEN PLACED & FINISHED, "HUNT PROCESS" OR EQUAL

BRICK SHALL BE IN ACCORDANCE WITH SECT. 775

COURSE BRICK IN MORTAR OR CLASS 'C' CONCRETE PER SECT. 725, 505

CLASS 'A' CONCRETE PER SECT. 725, 505

TROWEL SMOOTH 12" FOR M.H. OVER 13' DEEP

DETAIL NO.

422



STANDARD DETAIL ENGLISH

BRICK SEWER MANHOLE AND COVER FRAME ADJUSTMENT


REVISED

01-01-2012

DETAIL NO.


422

FRAME TOP VIEW

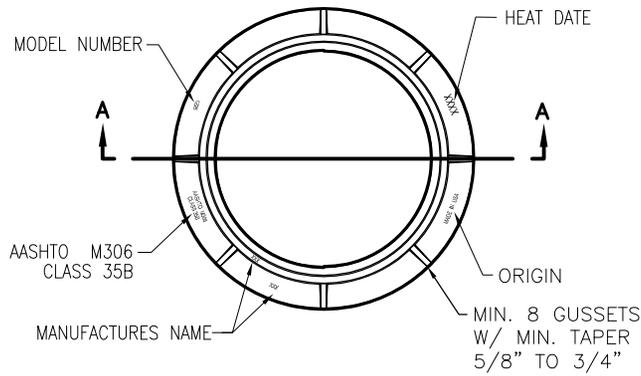


FRAME WT. (CL. 35) – 180 LBS


COVER TOP VIEW

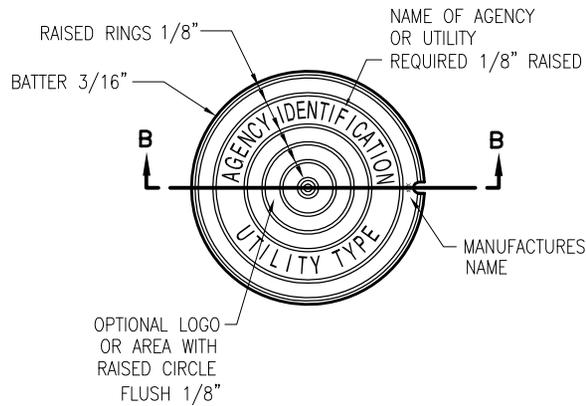


COVER BOTTOM VIEW

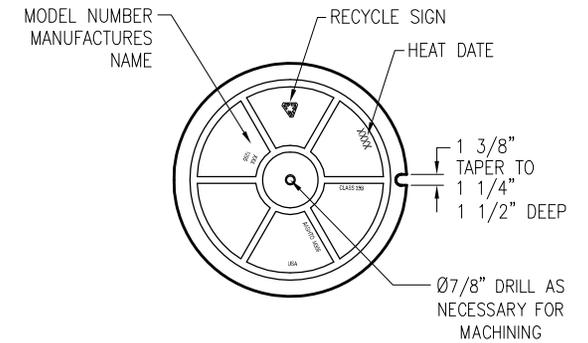


COVER WT. (CL. 35) – 188 LBS

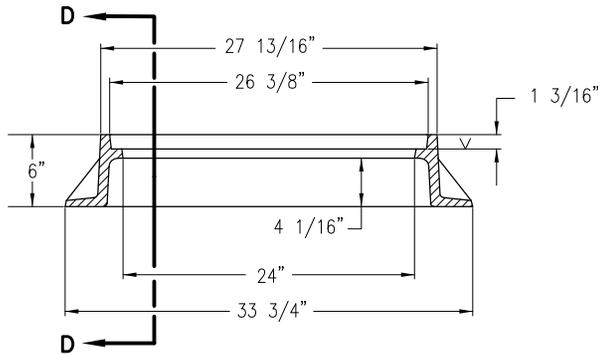


SECTION A



SECTION D



SECTION C

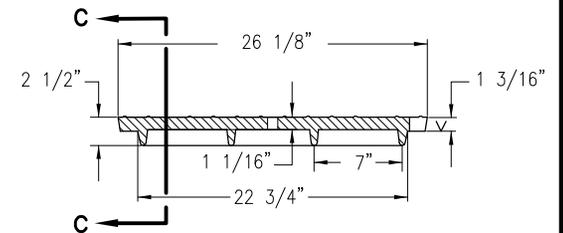

SECTION B

NOTE:

LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED, (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" IN HEIGHT AND RAISED FLUSH W/ TOP OF RINGS. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% MORE OR LESS THAN THE APPROXIMATE WEIGHT SPECIFIED. CASTINGS SHALL CONFORM TO ASTM A-48, CLASS 35 AND AASHTO M306. THE BEARING SURFACES OF THE FRAMES AND COVERS SHALL BE MACHINED AND THE COVERS SHALL SEAT FIRMLY WITHOUT ROCKING. ALL DIMENSIONS SHALL HAVE A 1/16" TOLERANCE.

DETAIL NO.

423-1



STANDARD DETAIL
ENGLISH

**24" CAST IRON
MANHOLE FRAME AND COVER**


REVISED

01-01-2012

DETAIL NO.


423-1

FRAME TOP VIEW

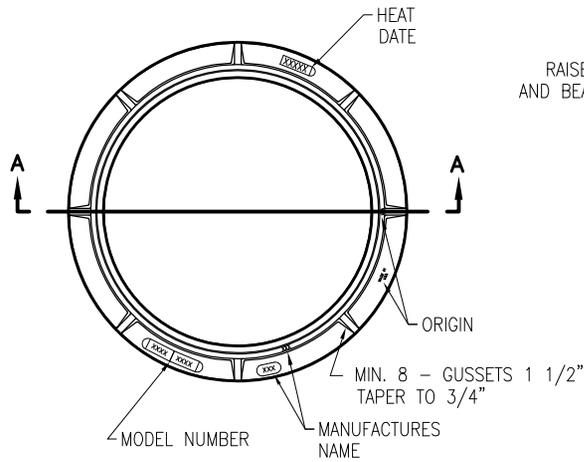


FRAME WT. (CL. 35) - 227 LBS


COVER TOP VIEW

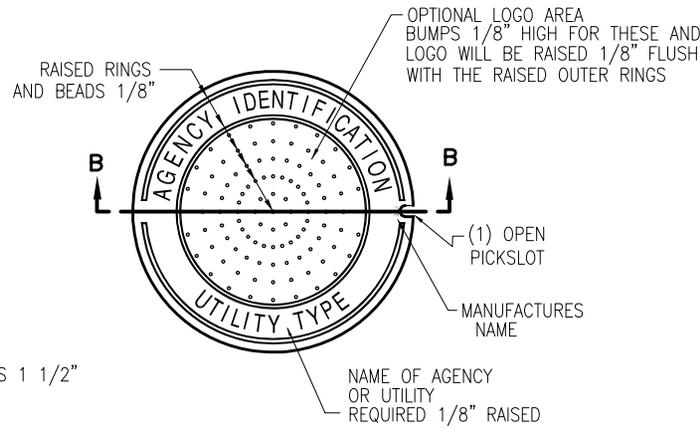


COVER BOTTOM VIEW

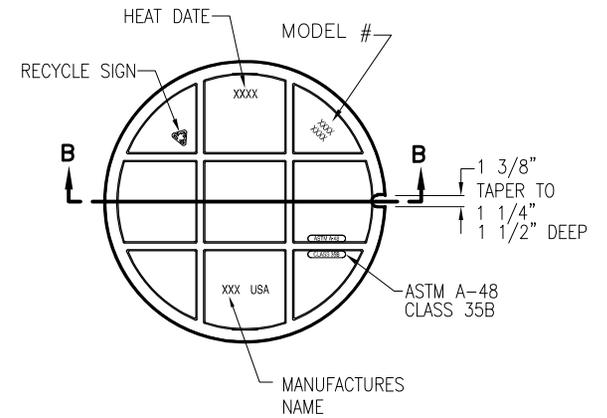


COVER WT. (CL. 35) - 210 LBS

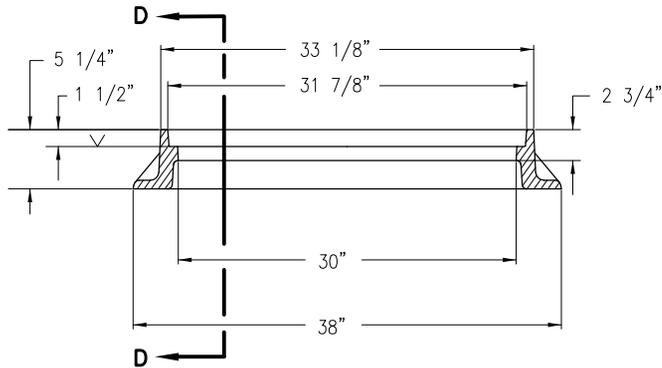


SECTION A



SECTION D



SECTION C

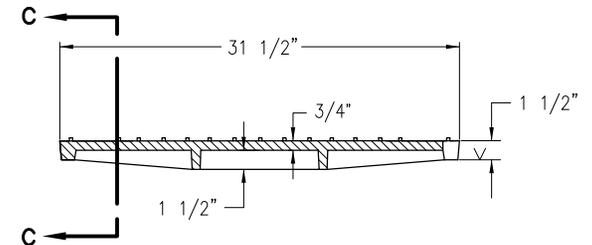

SECTION B

NOTE:

LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED, (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" IN HEIGHT AND RAISED FLUSH W/ TOP OF COVER. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% MORE OR LESS THAN THE APPROXIMATE WEIGHT SPECIFIED. CASTINGS SHALL CONFORM TO ASTM A-48, CLASS 35 AND AASHTO M306. THE BEARING SURFACES OF THE FRAMES AND COVERS SHALL BE MACHINED AND THE COVERS SHALL SEAT FIRMLY WITHOUT ROCKING. ALL DIMENSIONS SHALL HAVE A 1/16" TOLERANCE.

DETAIL NO.
423-2




STANDARD DETAIL
ENGLISH

**30" CAST IRON
MANHOLE FRAME AND COVER**

REVISED
01-01-2012


DETAIL NO.
423-2

FRAME TOP VIEW

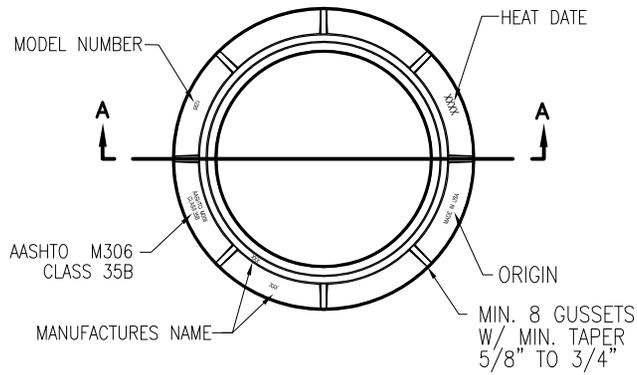


FRAME WT. (CL. 35) – 180 LBS


COVER TOP VIEW

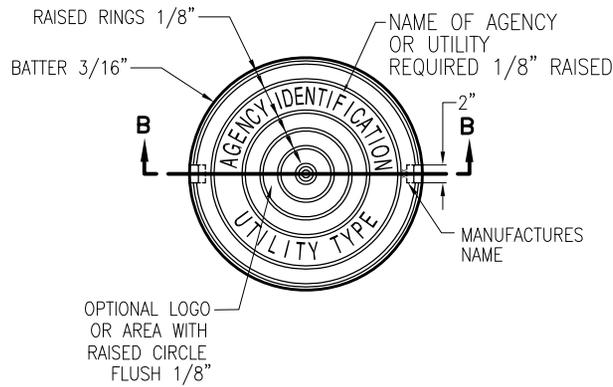


COVER BOTTOM VIEW

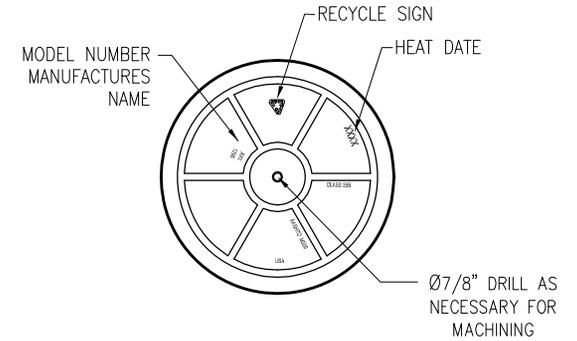


COVER WT. (CL. 35) – 188 LBS

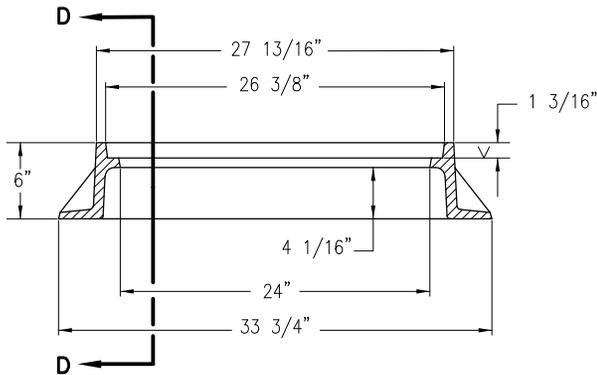


SECTION A



SECTION D



SECTION C

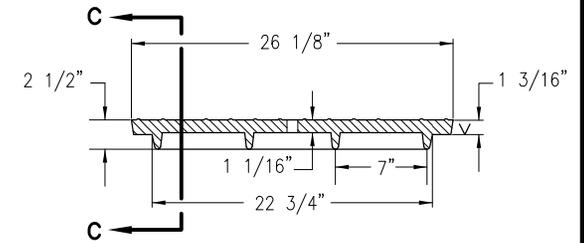

SECTION B

NOTE:

LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED, (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" IN HEIGHT AND RAISED FLUSH W/ TOP OF COVER. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% MORE OR LESS THAN THE APPROXIMATE WEIGHT SPECIFIED. CASTINGS SHALL CONFORM TO ASTM A-48, CLASS 35 AND AASHTO M306. THE BEARING SURFACES OF THE FRAMES AND COVERS SHALL BE MACHINED AND THE COVERS SHALL SEAT FIRMLY WITHOUT ROCKING. ALL DIMENSIONS SHALL HAVE A 1/16" TOLERANCE.

DETAIL NO.
424-1




STANDARD DETAIL
ENGLISH

**24" CAST IRON WATERTIGHT
MANHOLE FRAME AND COVER**

REVISED
01-01-2012


DETAIL NO.
424-1

FRAME TOP VIEW

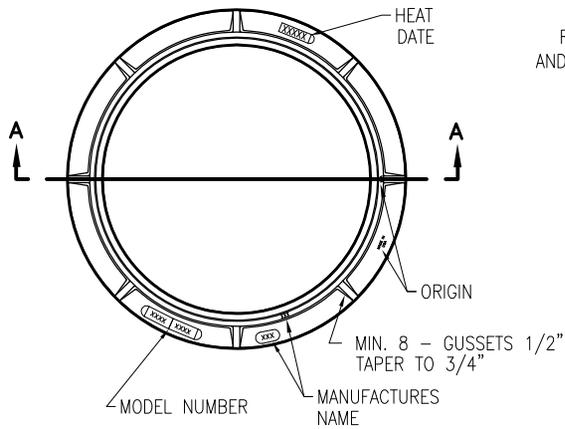


FRAME WT. (CL. 35) - 227 LBS





COVER TOP VIEW

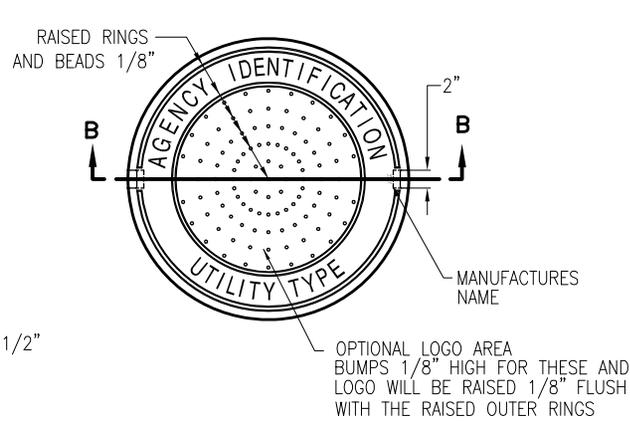

COVER BOTTOM VIEW

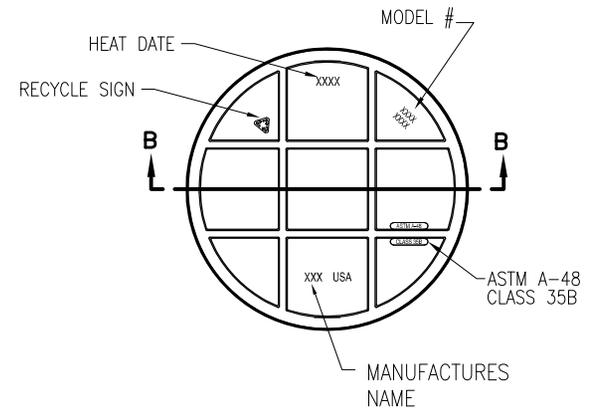

COVER WT. (CL. 35) - 210 LBS

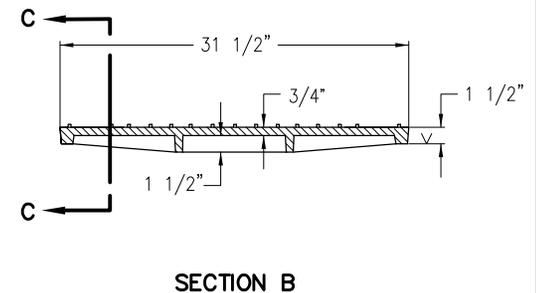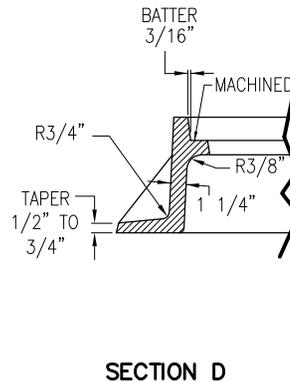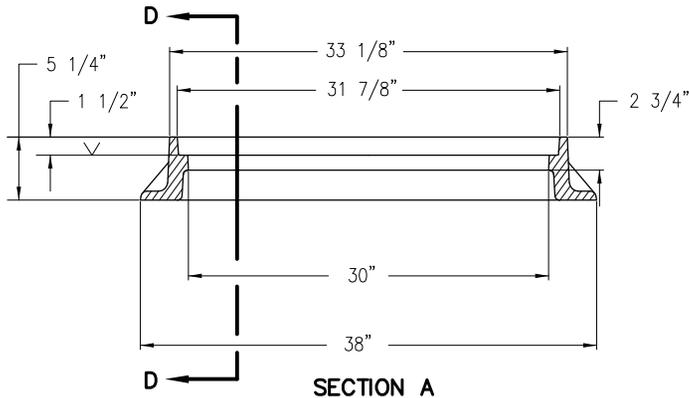

NOTE:

LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED, (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" IN HEIGHT AND RAISED FLUSH W/ TOP OF COVER. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% MORE OR LESS THAN THE APPROXIMATE WEIGHT SPECIFIED. CASTINGS SHALL CONFORM TO ASTM A-48, CLASS 35 AND AASHTO M306. THE BEARING SURFACES OF THE FRAMES AND COVERS SHALL BE MACHINED AND THE COVERS SHALL SEAT FIRMLY WITHOUT ROCKING. ALL DIMENSIONS SHALL HAVE A 1/16" TOLERANCE.

DETAIL NO.
424-2




STANDARD DETAIL
ENGLISH

**30" CAST IRON WATERTIGHT
MANHOLE FRAME AND COVER**

REVISED
01-01-2012


DETAIL NO.
424-2

6 RIBS, EQUALLY SPACED 60°

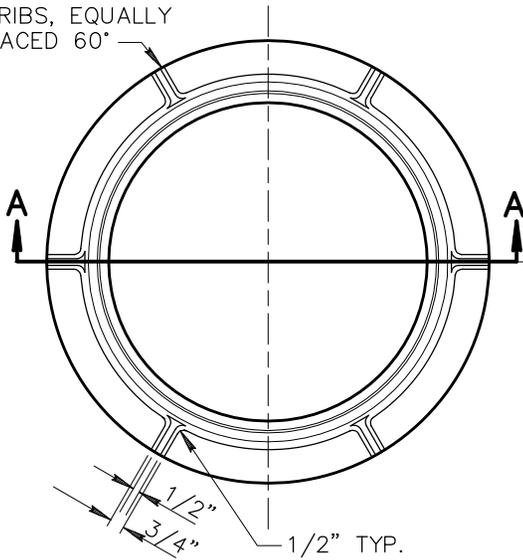


TOP VIEW

6 RIBS, EQUALLY SPACED 60°

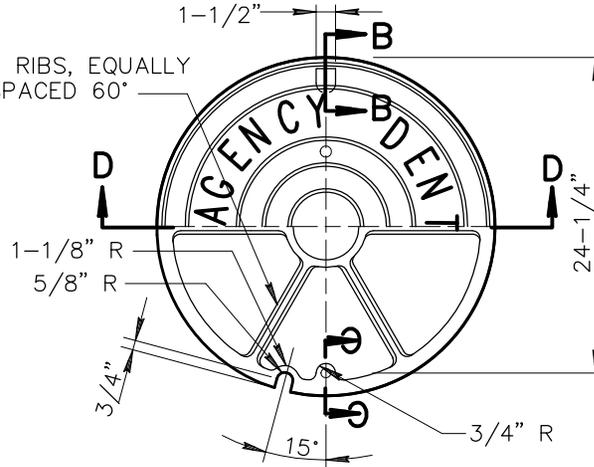


BOTTOM VIEW


3/4" DRILL




SECTION 'B-B'




SECTION 'C-C'




SECTION VIEW OF FRAME AND COVER WITH CAM LOCKING DEVICE



SECTION E-E

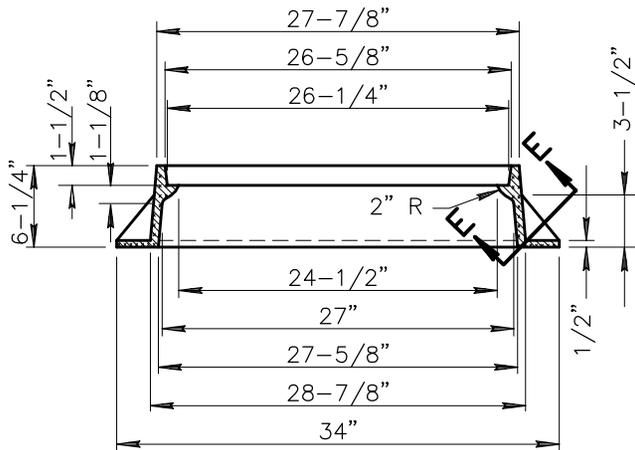

SECTION 'A-A'

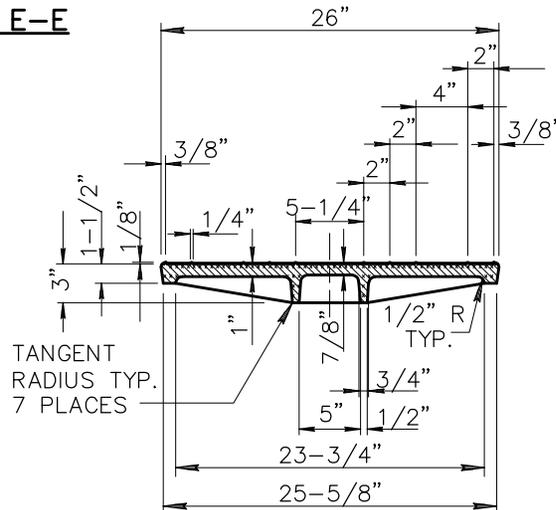

SECTION 'D-D'

NOTES:

1. MATERIAL SHALL CONFORM TO A.S.T.M. STANDARDS
B 179-65 ALLOY SN122A
B 179-65 ALLOY CN42A
B 108-65 ALLOY SC103A
(ALL 3 ACCEPTABLE)
2. LETTERING ON MANHOLE COVER TO CONTAIN NAME OF AGENCY AND UTILITY FOR WHICH MANHOLE IS NEEDED. (I.E. "PHOENIX SANITARY SEWER"), OR AS DIRECTED. THE TOTAL WIDTH OF INDIVIDUAL LETTERS TO BE SUCH THAT LETTERS AND WORDS ARE EQUALLY SPACED AND BALANCED TO FORM A COMPLETE CIRCLE WITH SPACERS BEFORE AND AFTER THE WORD IDENTIFYING THE AGENCY INVOLVED. LETTERS TO BE 2" RAISED 1/8" ABOVE LEVEL OF COVER. TYPE OF LETTERS TO BE SUBMITTED FOR APPROVAL.
3. WEIGHT OF CASTINGS SHALL BE NO MORE THAN 2% LESS THAN THE APPROXIMATE WEIGHT SPECIFIED.
4. CASTINGS SHALL CONFORM TO SECT. 787.
5. SHALL CONFORM TO SECT. 625.3.1 - (FRAME AND COVER).

DETAIL NO.

425



STANDARD DETAIL
ENGLISH


24" ALUMINUM
MANHOLE FRAME AND COVER

REVISED


01-01-1998

DETAIL NO.

425

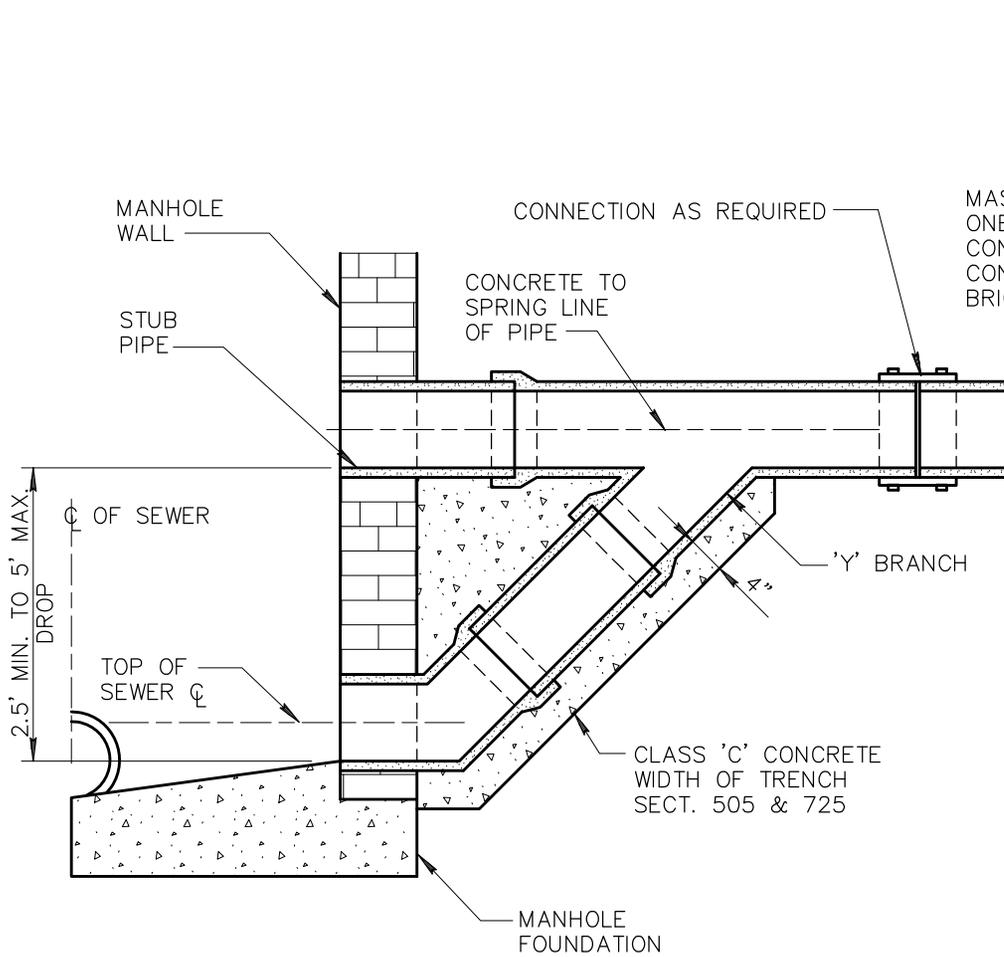

TYPE A
2.5' TO 5' DROP

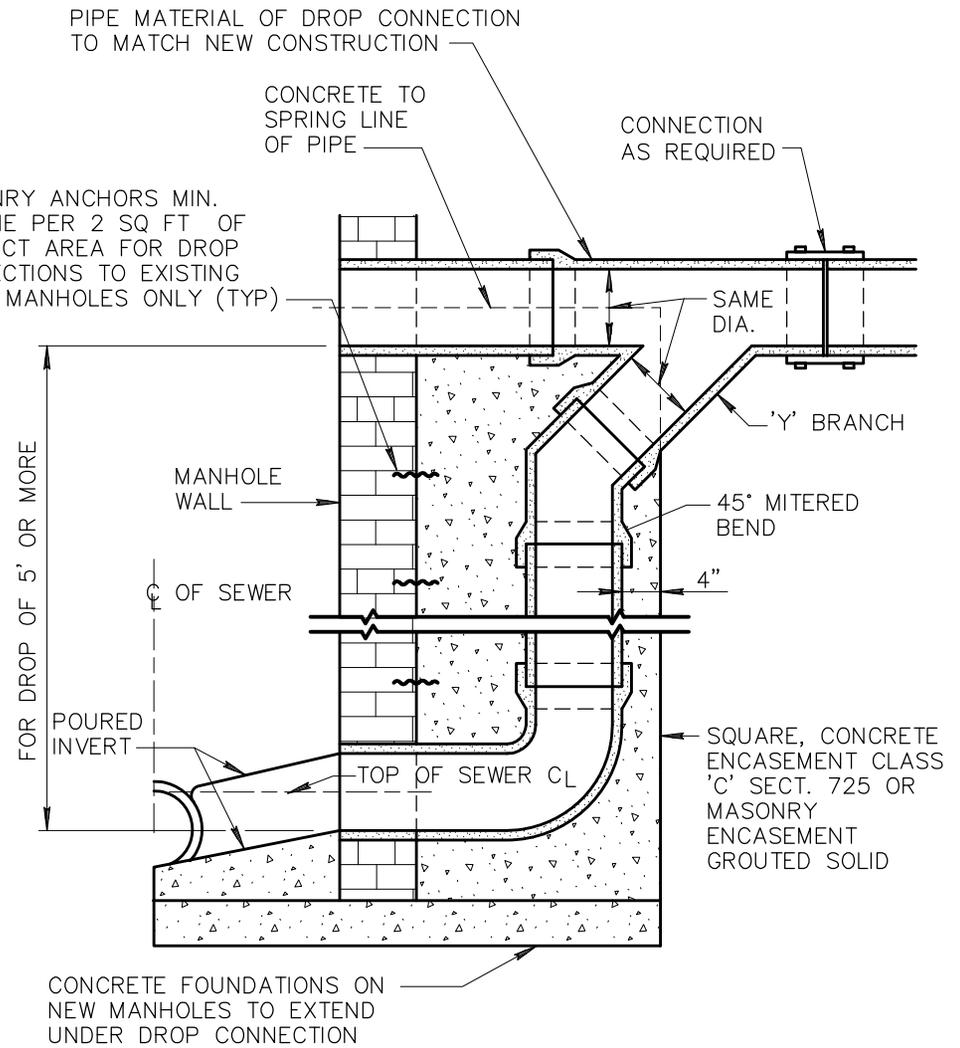

TYPE B
5' OR MORE

DETAIL NO.

426



STANDARD DETAIL
ENGLISH


DROP SEWER CONNECTIONS

REVISED


01-01-2007

DETAIL NO.

426

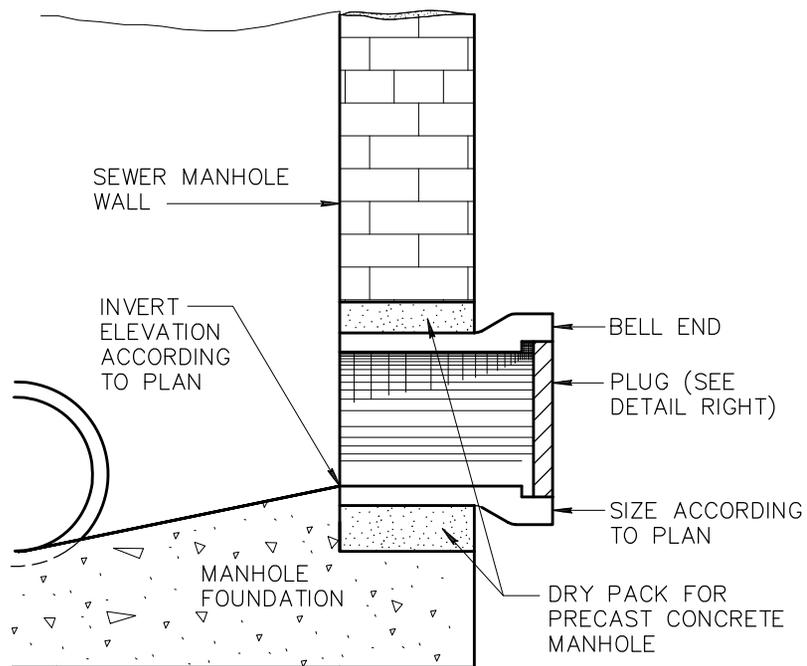


TYPICAL STUB OUT

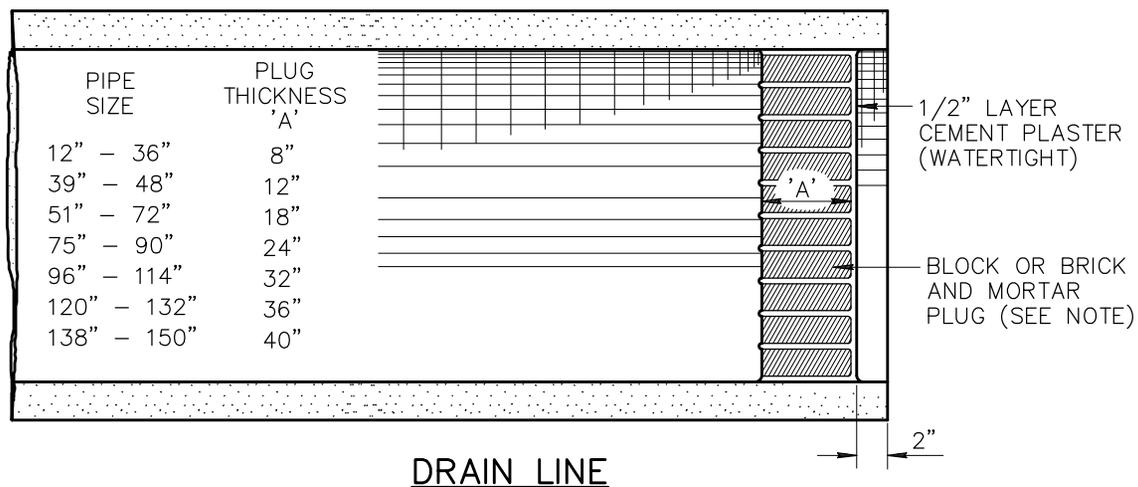


NOTES:

- NOTE: COMPACT SOIL AT END OF PIPE TO 95% OF MAXIMUM DENSITY.
- IF DEPTH OF COVER IS LESS THAN 5' OR GREATER THAN 10' INCREASE PLUG THICKNESS A MIN. OF 4".

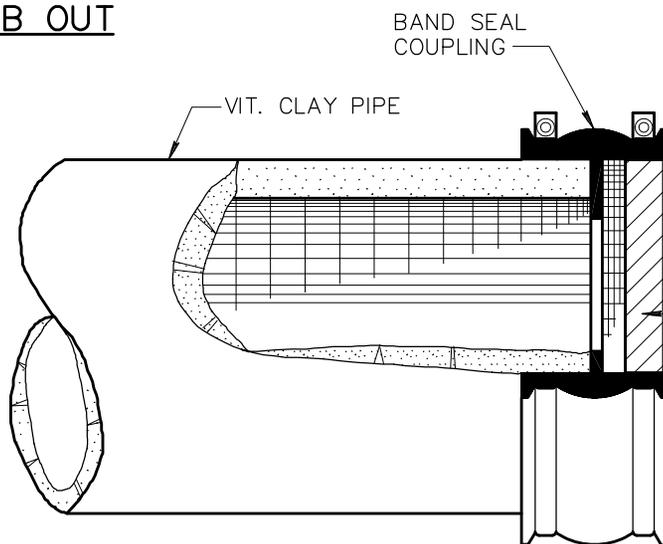

SEWER LINE

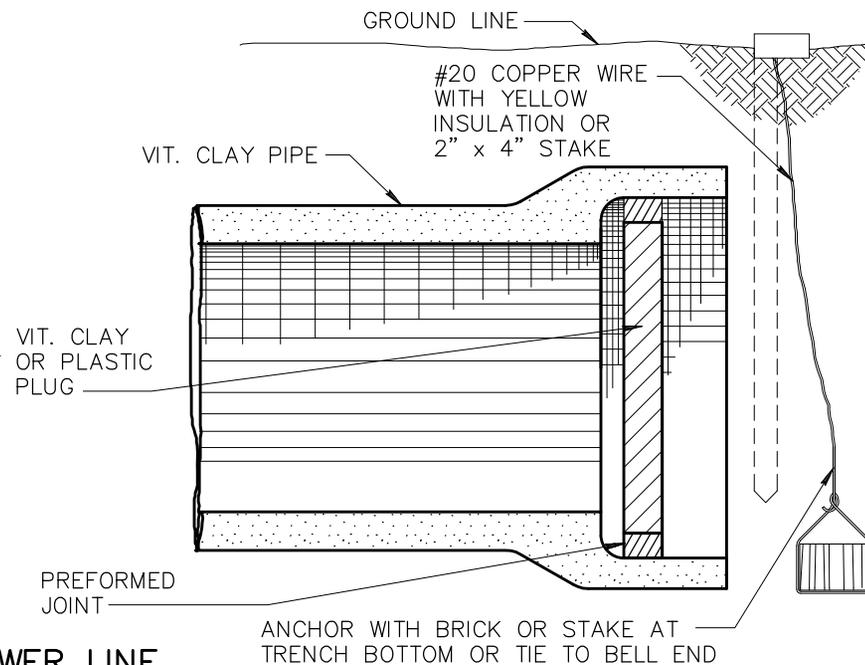

DETAIL NO.

427



STANDARD DETAIL
ENGLISH





STUB OUT AND PLUGS

REVISED

01-01-1998

DETAIL NO.




427

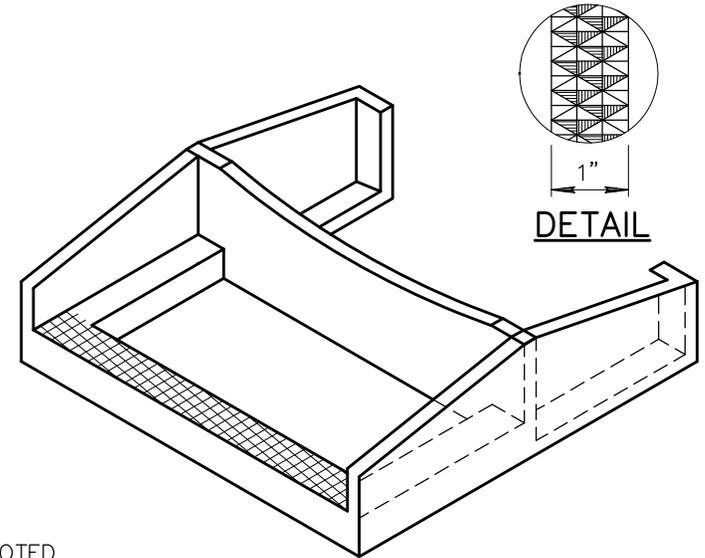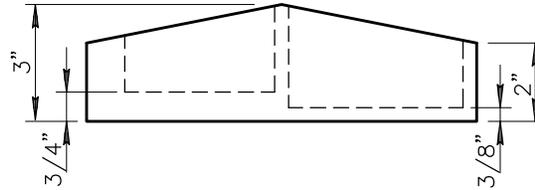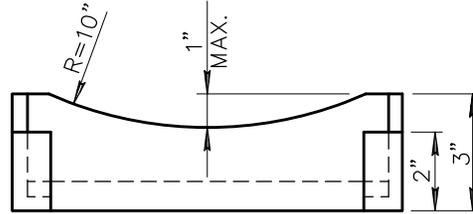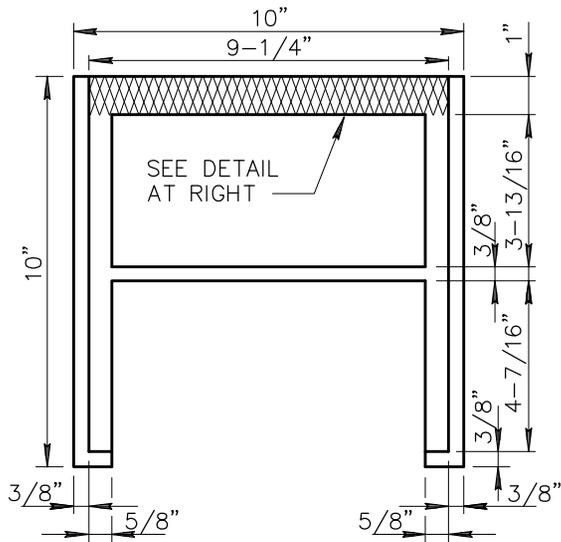


NOTES

1. ALL DIMENSIONS ARE MINIMUM EXCEPT WHERE NOTED.
2. CASTING AS PER SECT. 787.

CAST IRON MANHOLE STEP

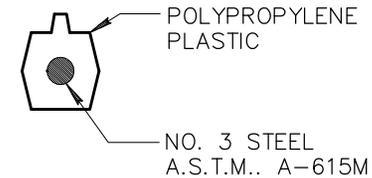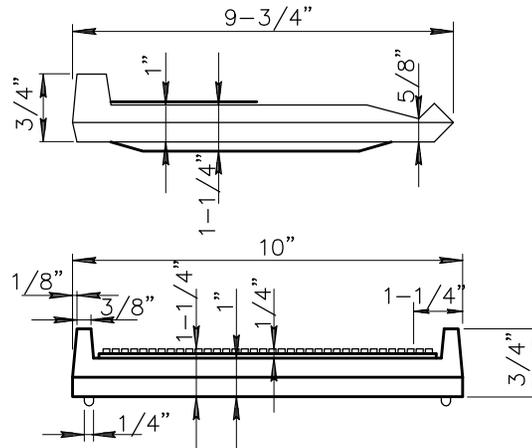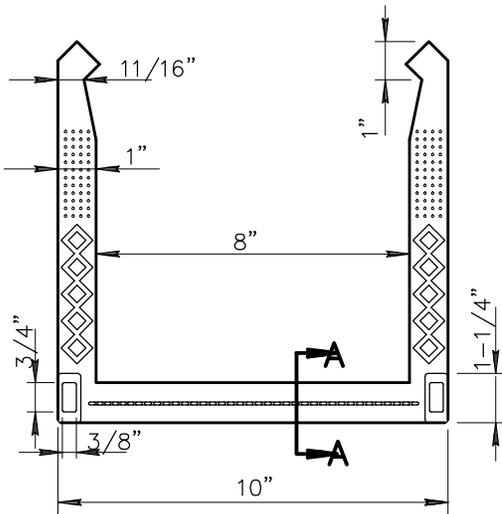

SECTION A-A

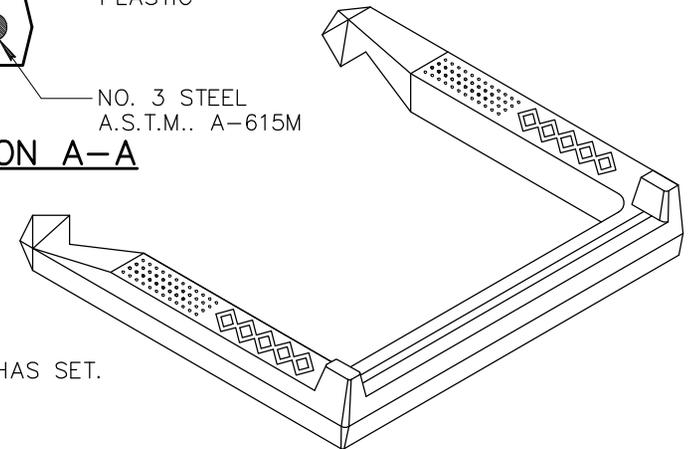

NOTES

1. STEPS SHALL BE PLACED INTO WET CONCRETE WALL DURING MANUFACTURE OR MORTARED INTO HOLES AFTER CONCRETE HAS SET.
2. POLYPROPYLENE MUST MEET REQUIREMENTS OF A.S.T.M. 2146, TYPE II, GRADE 16906.

POLYPROPYLENE MANHOLE STEP

DETAIL NO.

428



STANDARD DETAIL
ENGLISH

MANHOLE STEPS


REVISED

01-01-1998

DETAIL NO.


428

MANHOLE FRAME AND COVER PER DETAIL NO. 423

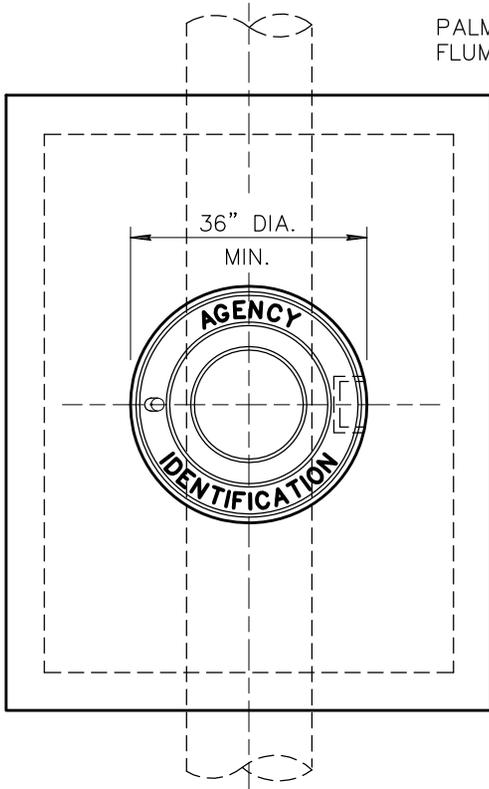

MANHOLE & COVER SLAB


PALMER BOWLUS FLUME OR EQUAL

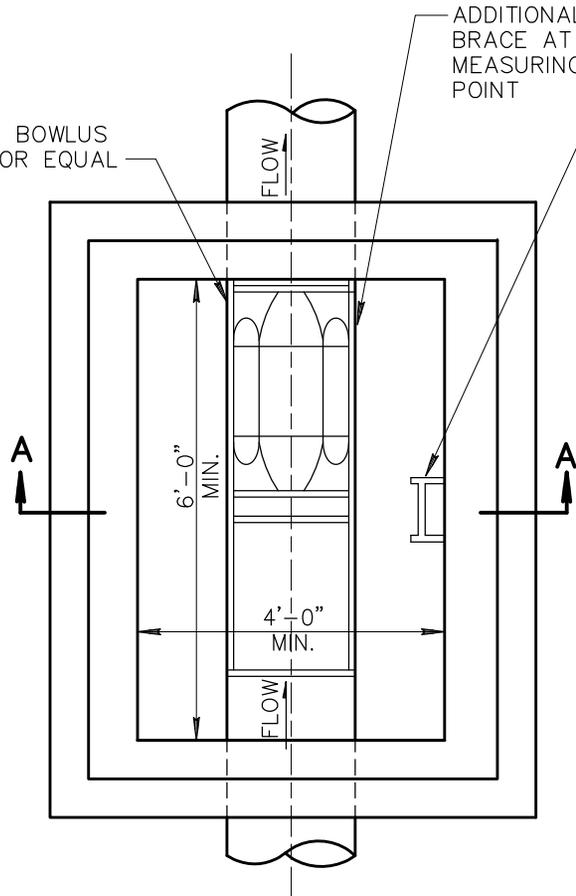

PLAN VIEW

NOTE: WITH COVER REMOVED.

M.H. STEPS PER DETAIL NO. 428 AT CENTER

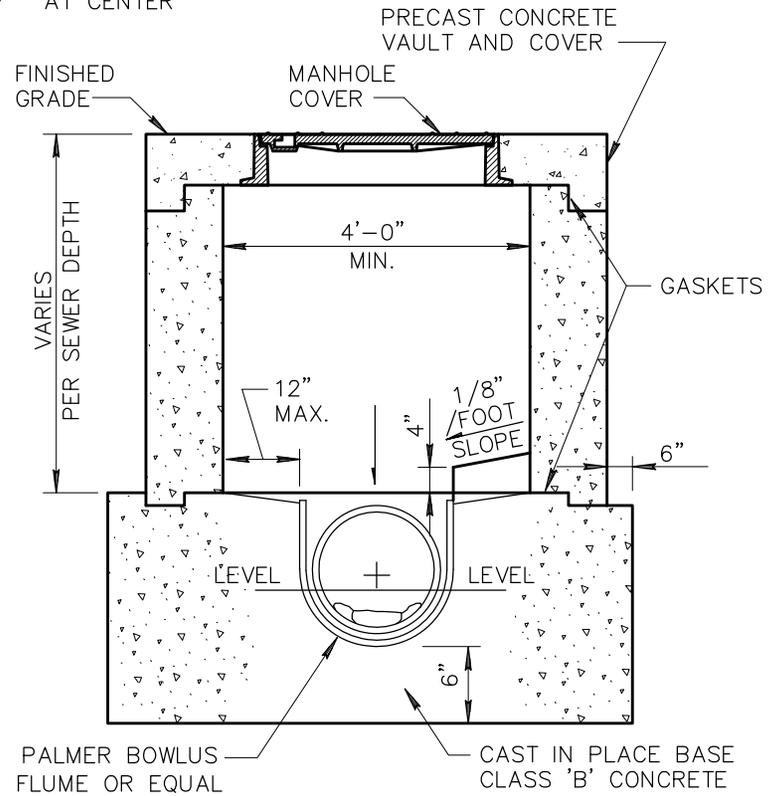

SECTION A-A

NOTE: LADDER NOT SHOWN IN SECTION VIEW. SECTION SHOWN WITH COVER IN PLACE.

NOTES:

1. THIS CONTROL VAULT WITH MANHOLE AND COVER SHALL BE USED ON 6" AND 8" DIAMETER SEWER WITH FLOWS IN THE RANGE OF 40 TO 340 GPM.
2. VAULT TO BE CONSTRUCTED ON STRAIGHT RUN OF BUILDING SEWER. ACCESSIBLE AND SAFELY LOCATED ON THE OWNERS PROPERTY ADJACENT TO A PUBLIC RIGHT-OF-WAY.
3. THE PALMER BOWLUS FLUME SHALL BE INSTALLED PER THE MANUFACTURERS RECOMMENDATIONS.
4. THE PRE-CAST CONCRETE VAULT SHALL BE RECTANGULAR WITH MINIMUM INSIDE DIMENSIONS OF 4" WIDE AND 6" LONG AND AT A DEPTH OF THE DESIGN OF THE BUILDING SEWER.
5. A SHOP DRAWING SHALL BE SUBMITTED TO THE CONTRACTING AGENCY FOR APPROVAL BEFORE INSTALLATION OF THE VAULT AND THE PALMER BOWLUS FLUME WILL BE ALLOWED.

DETAIL NO.

429



STANDARD DETAIL
ENGLISH


**INDUSTRIAL WASTE CONTROL
VAULT WITH MANHOLE**

REVISED

01-01-1998

DETAIL NO.




429

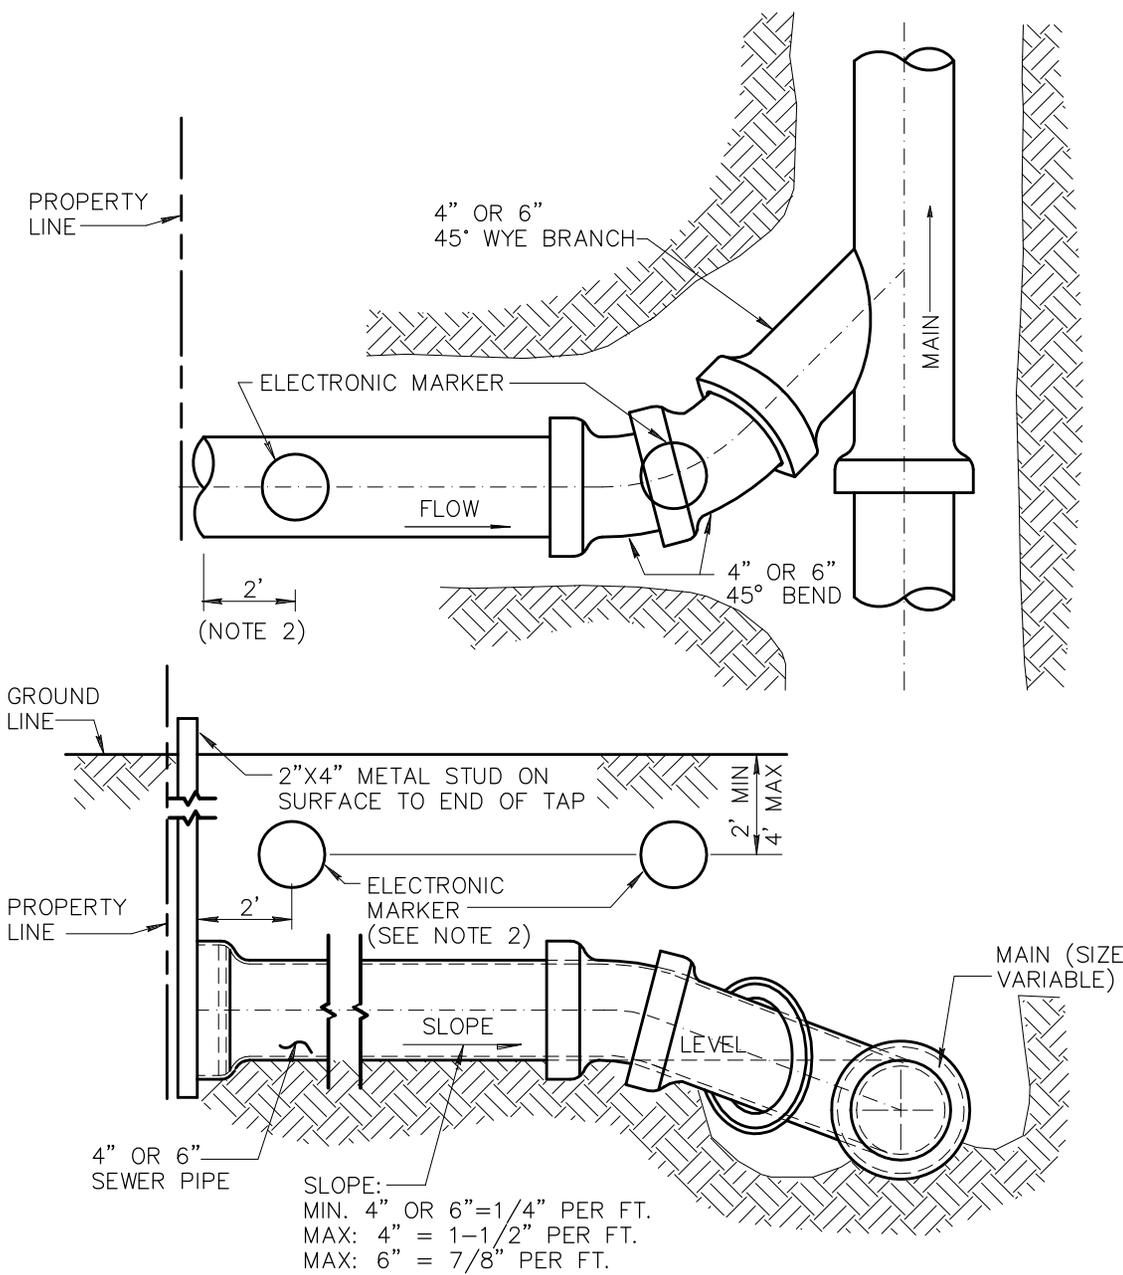

NOTES:

1. ELECTRONIC MARKER SHALL BE A 3M MODEL 1424-XR/iD [4" DIAMETER SELF LEVELING MARKER BALL GREEN IN COLOR] OR APPROVED EQUAL OR AS REQUIRED BY THE LOCAL AGENCY.
2. MARKER SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS, 2' BACK FROM THE END OF THE SEWER SERVICE STUB AND CINCH TIED TO PIPE OR ABOVE PIPE AS REQUIRED BY LOCAL AGENCY. AN ADDITIONAL MARKER SHALL BE INSTALLED AT EACH SERVICE STUB BEND.
3. ELECTRONIC MARKER SHALL BE RESTORED BY CONTRACTOR IF DISTURBED WHEN PRIVATE SERVICE LINE CONNECTION IS INSTALLED.
4. MARKER SHALL BE USED IN ADDITION TO A 2"x4" METAL STUD.
5. CONSTRUCTION DETAIL APPLIES WHERE CONTRACTOR BUILDS HOUSE CONNECTION. TAP EXTENDS TO PROPERTY LINE IN ALLEYS OR STREETS OR TO EASEMENT LINE.
6. SIZE OF TAP SHALL BE DESIGNATED ON PLANS.
7. CONSTRUCT TAP AT MINIMUM SLOPE IF COVER WILL BE LESS THAN 5' AT PROPERTY LINE.
8. ALL FITTINGS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D-2321. THE CONTRACTOR MAY VARY FROM THE DRAWING TO USE THE APPROPRIATE WYES, TEE-WYES AND BENDS TO ENSURE NO MISALIGNMENT OF THE PIPE AND FITTINGS. BLOCK OR BRACE FITTINGS JOINTS TO ENSURE ZERO DEGREES ANGULAR JOINT DEFLECTION.
9. END OF TAP TO BE SEALED AND MARKED AS NOTED.

ELECTRONIC MARKER PLACEMENT

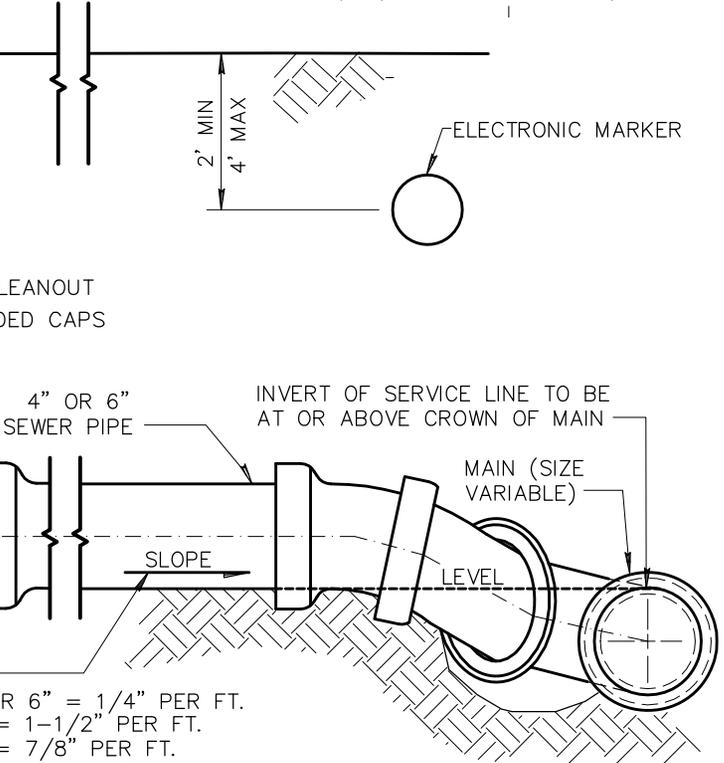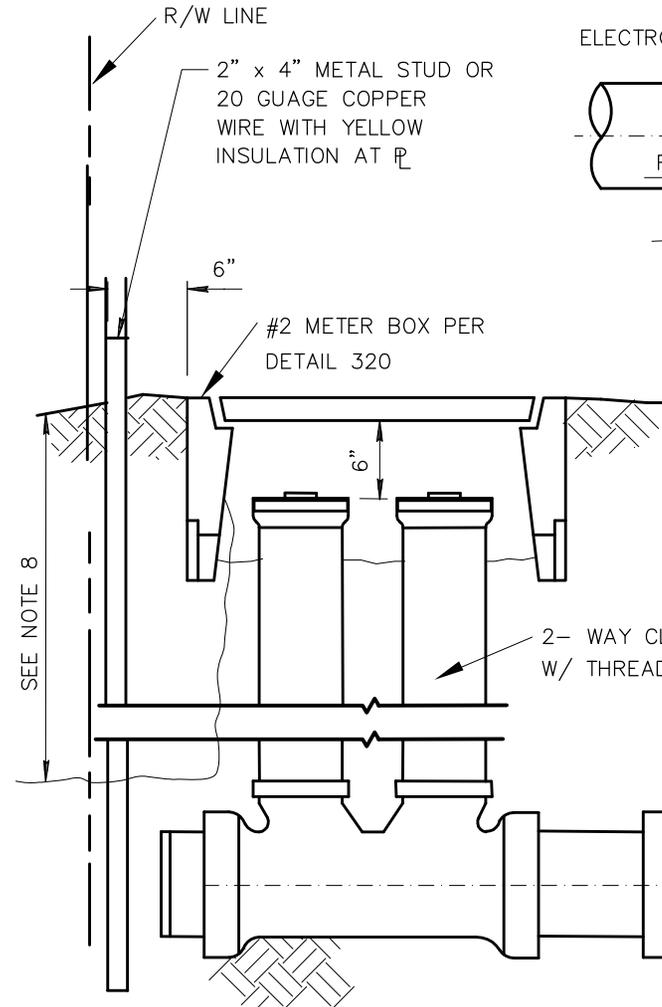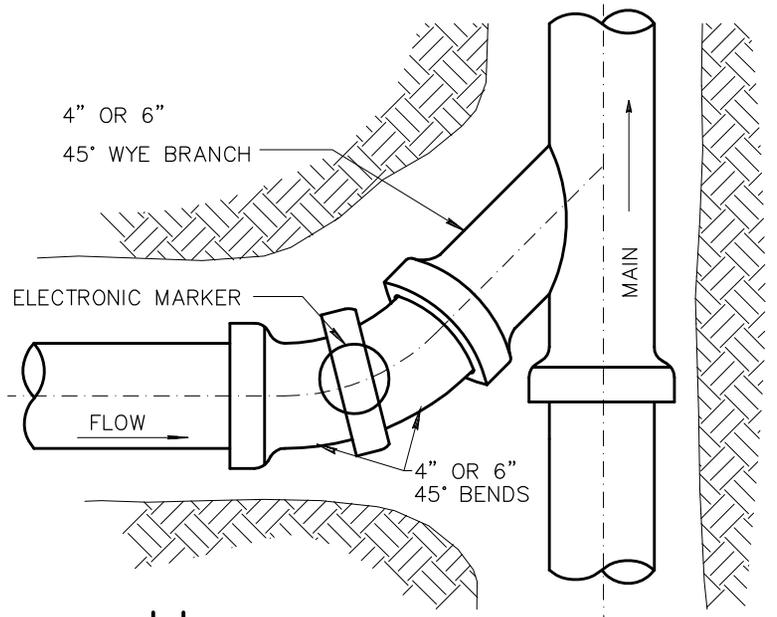

SLOPE:
 MIN: 4" OR 6" = 1/4" PER FT.
 MAX: 4" = 1-1/2" PER FT.
 MAX: 6" = 7/8" PER FT.

NOTES:

1. CONSTRUCTION DETAIL APPLIES WHERE CONTRACTOR BUILDS HOUSE CONNECTION. TAP EXTENDS TO PROPERTY LINE IN ALLEYS OR STREETS OR TO EASEMENT LINE.
2. SIZE OF TAP SHALL BE DESIGNATED ON PLANS.
3. CONSTRUCT TAP AT MINIMUM SLOPE IF COVER WILL BE LESS THAN 5' AT PROPERTY LINE.
4. IF DEPTH REQUIRES, MINIMUM SLOPE CAN BE REDUCED TO 1/8" PER FOOT PROVIDED STUB IS STAKED TO GRADE.
5. ALL FITTINGS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D-2321. THE CONTRACTOR MAY VARY FROM THE DRAWING TO USE THE APPROPRIATE WYES, TEE-WYES AND BENDS TO ENSURE NO MISALIGNMENT OF THE PIPE AND FITTINGS. BLOCK OR BRACE FITTING JOINTS TO ENSURE ZERO DEGREES ANGULAR JOINT DEFLECTION.
6. END OF TAP TO BE SEALED AND MARKED AS NOTED.
7. ELECTRONIC MARKER SHALL BE A 3M MODEL 1424-XR/iD [4" DIAMETER SELF LEVELING MARKER BALL GREEN IN COLOR] OR APPROVED EQUAL OR AS REQUIRED BY THE LOCAL AGENCY.
8. # 14 BARE COPPER LOCATOR WIRE ACCESSIBLE AT R/W AND AT PROPERTY OWNER CLEANOUT BOX NO GREATER THAN 4' DEEP.
9. STAMP OR WELD THE LETTER "S" ON LID OF METER BOX.

DETAIL NO.
440-2




STANDARD DETAIL
 ENGLISH

TYPE 'B' - SEWER BUILDING CONNECTION
TWO-WAY CLEANOUT AND METER BOX AT R/W
 (WHEN SPECIFIED BY LOCAL AGENCY)

REVISED
 01-01-2007


DETAIL NO.
440-2

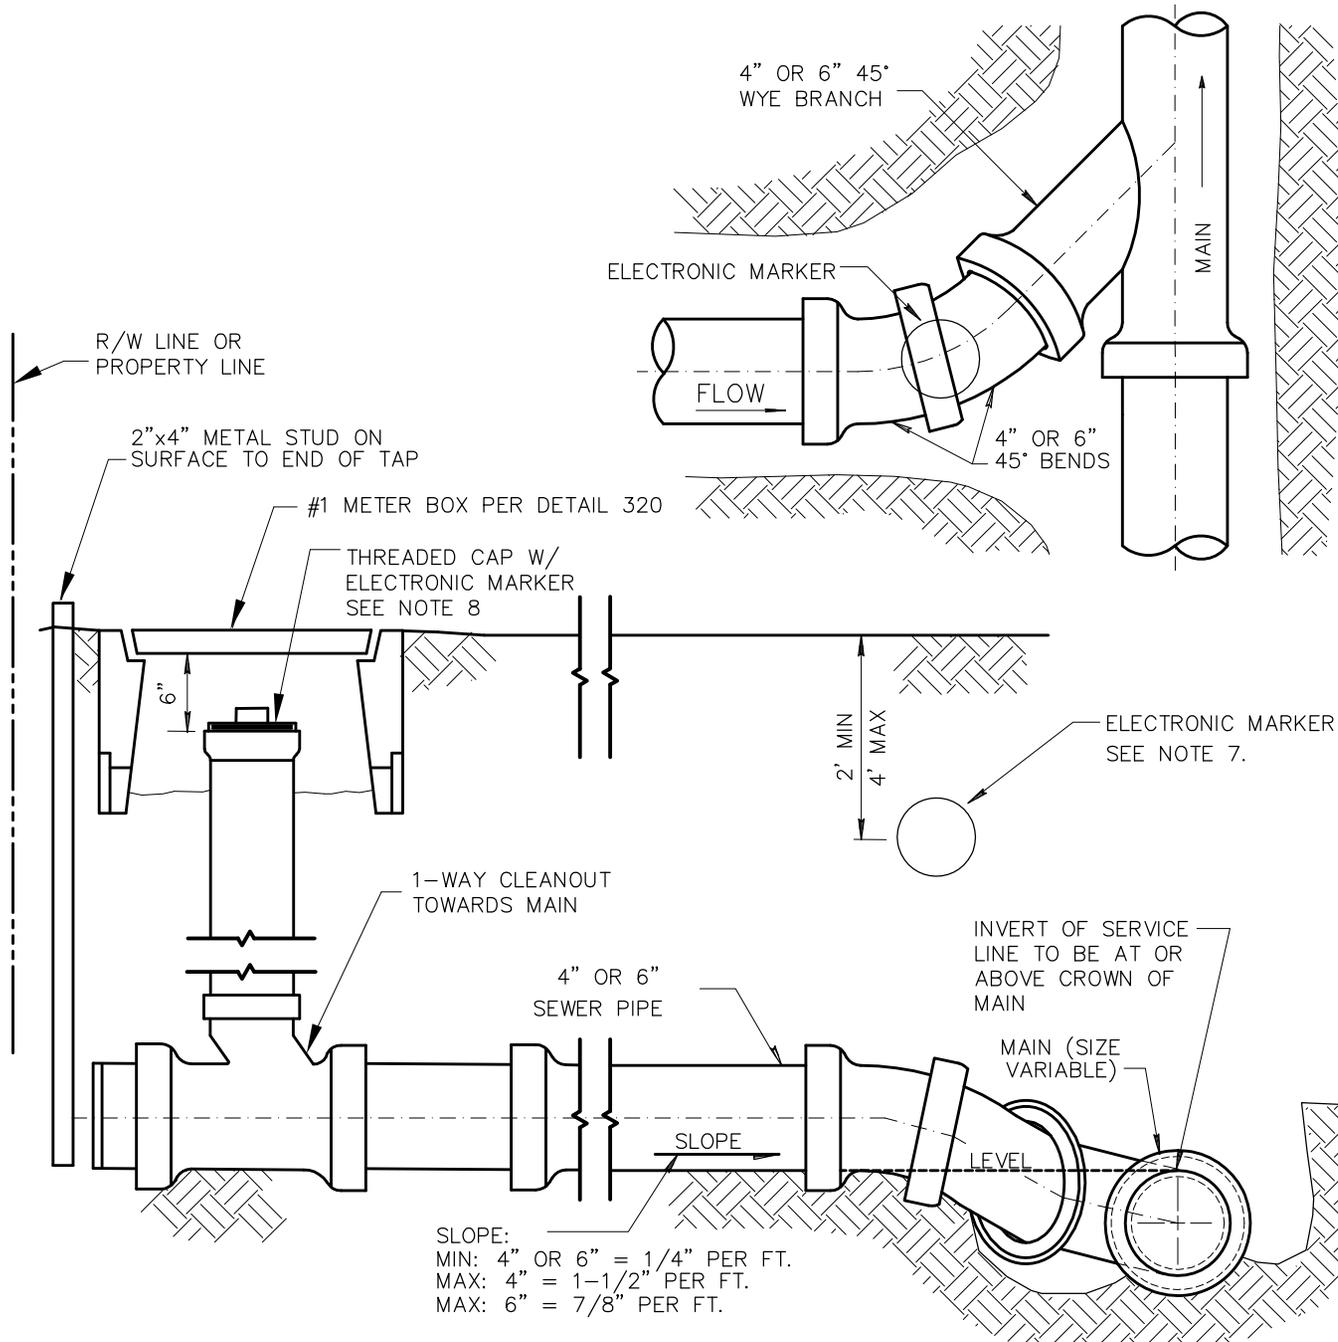


NOTES:

1. CONSTRUCTION DETAIL APPLIES WHERE CONTRACTOR BUILDS HOUSE CONNECTION. TAP EXTENDS TO PROPERTY LINE IN ALLEYS OR STREETS OR TO EASEMENT LINE.
2. SIZE OF TAP SHALL BE DESIGNATED ON PLANS.
3. CONSTRUCT TAP AT MIN. SLOPE IF COVER WILL BE LESS THAN 5' AT PROPERTY LINE.
4. IF DEPTH REQUIRES, MINIMUM SLOPE CAN BE REDUCED TO 1/8" PER FOOT PROVIDED STUB IS STAKED TO GRADE.
5. ALL FITTINGS SHALL BE INSTALLED IN ACCORDANCE WITH ASTM D-2321. THE CONTRACTOR MAY VARY FROM THE DRAWING TO USE THE APPROPRIATE WYES, TEE-WYES AND BENDS TO ENSURE NO MISALIGNMENT OF THE PIPE AND FITTINGS. BLOCK OR BRACE FITTING JOINTS TO ENSURE ZERO DEGREES ANGULAR JOINT DEFLECTION.
6. END OF TAP TO BE SEALED AND MARKED.
7. ELECTRONIC MARKER SHALL BE A 3M MODEL 1424-XR/iD [4" DIAMETER SELF LEVELING MARKER BALL GREEN IN COLOR] OR APPROVED EQUAL OR AS REQUIRED BY THE LOCAL AGENCY.
8. INSTALL RAISED 4" THREADED PLUG IN CLEANOUT INCORPORATING 3M MODEL 1414 ELECTRONIC DISC MARKER. GREEN IN COLOR. LOCATOR PLUG TO BE GPK PRODUCTS MODEL #228-0004 DM OR APPROVED EQUAL.
9. STAMP OR WELD THE LETTER "S" ON LID OF METER BOX.


SLOPE:
 MIN: 4" OR 6" = 1/4" PER FT.
 MAX: 4" = 1-1/2" PER FT.
 MAX: 6" = 7/8" PER FT.

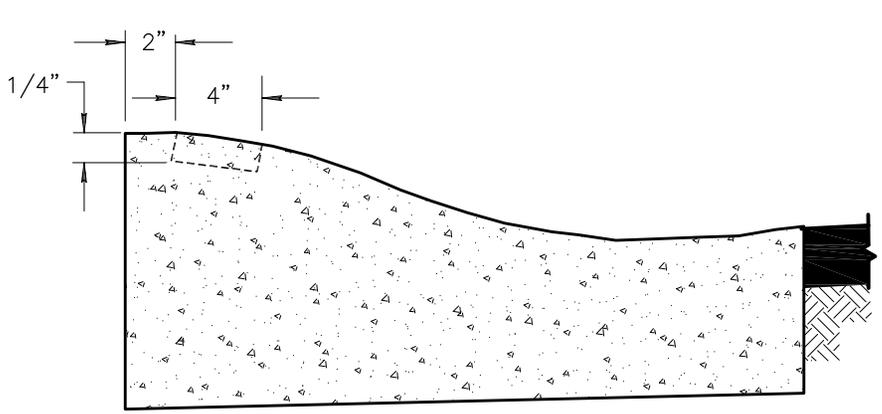


SECTION A-A

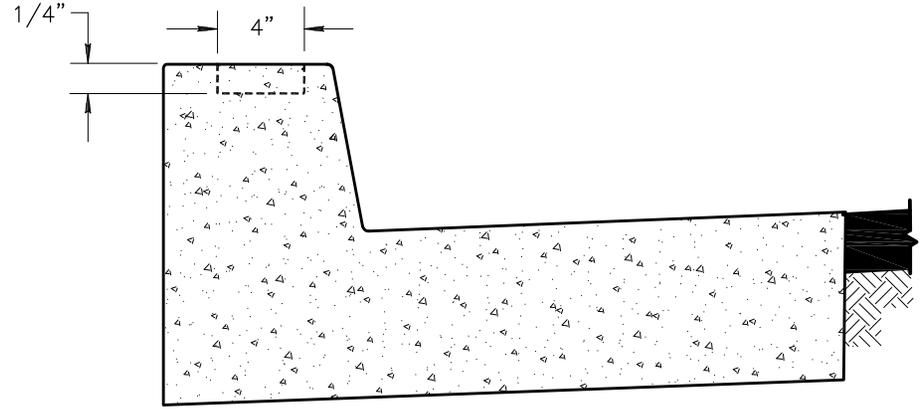

SECTION A-A

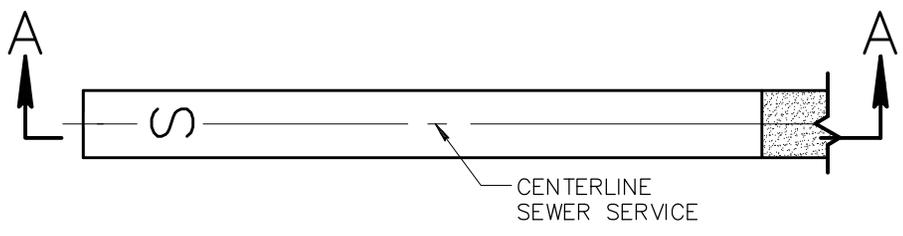


CURB STAMP ROLLED CURB

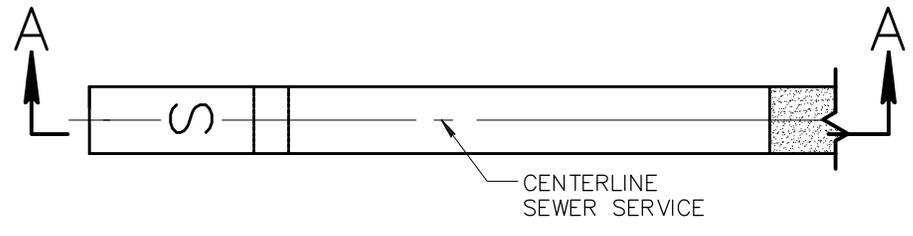


CURB STAMP VERTICAL CURB

NOTES:

1. STAMP TOP OF CURB WITH 4" TALL BY 1/4" DEEP "S" TO DESIGNATE SEWER SERVICE LINE CROSSING.

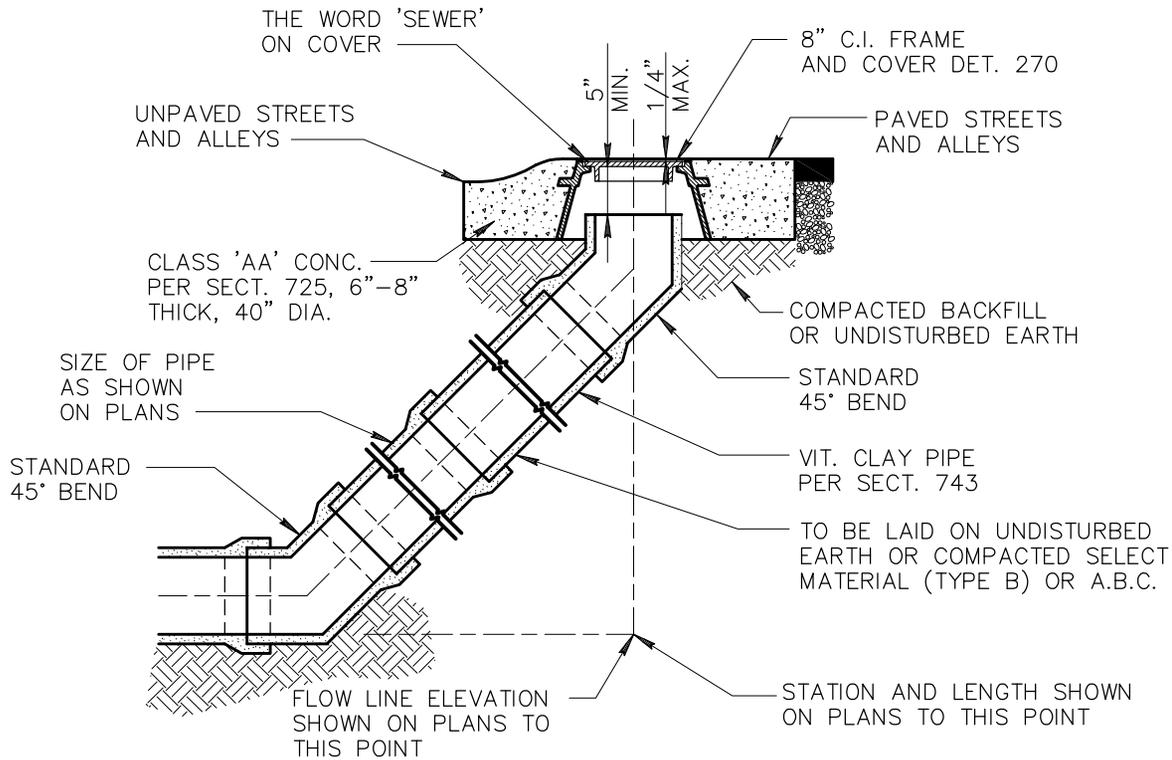

CLEANOUT INSTALLATION

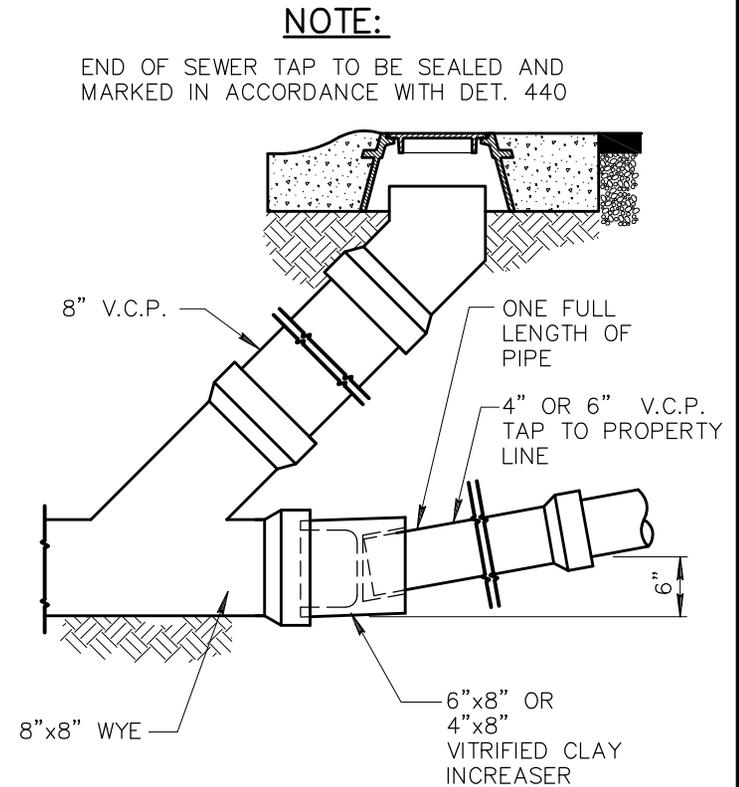

SEWER TAP AT CLEANOUT

DETAIL NO.

441



MARICOPA
ASSOCIATION of
GOVERNMENTS

STANDARD DETAIL
ENGLISH


SEWER CLEANOUT

REVISED



01-01-2001

DETAIL NO.


441

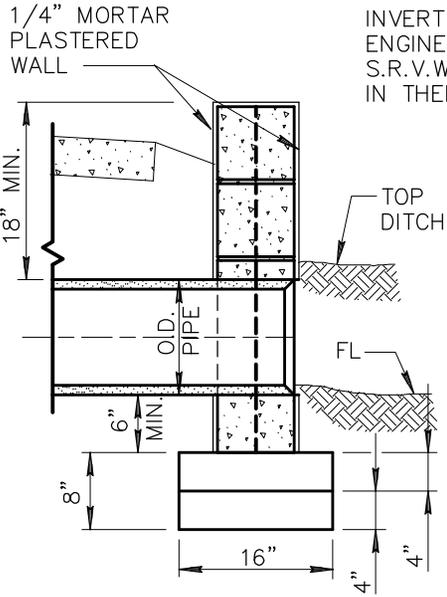


INVERT GRADE SET BY ENGINEER OR BY S.R.V.W.U.A. ENGINEERS IN THEIR LATERALS

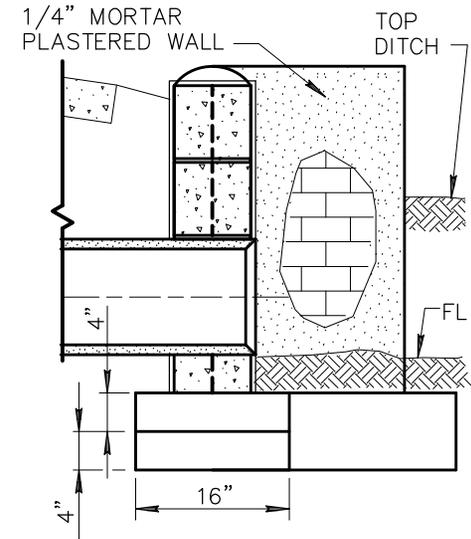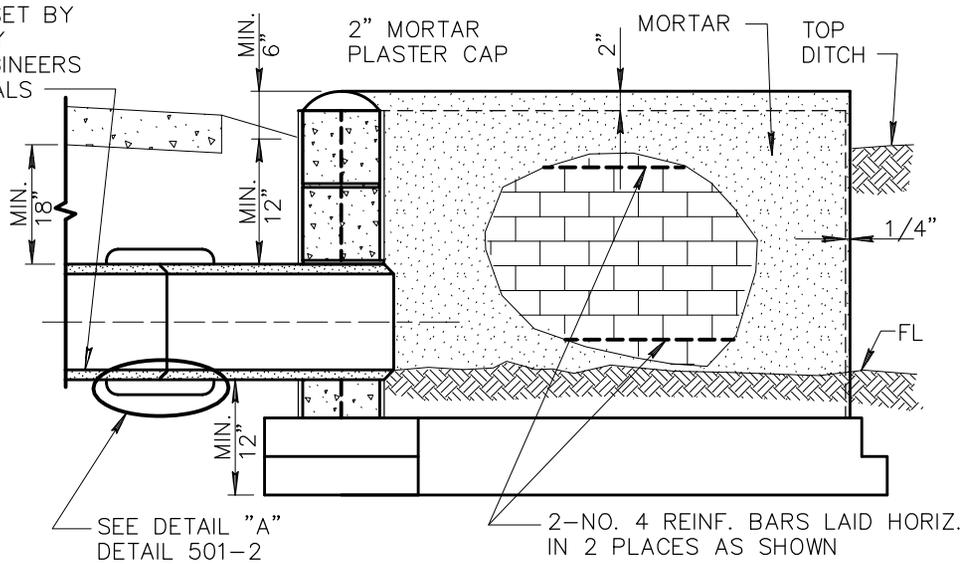


SECTION B-B

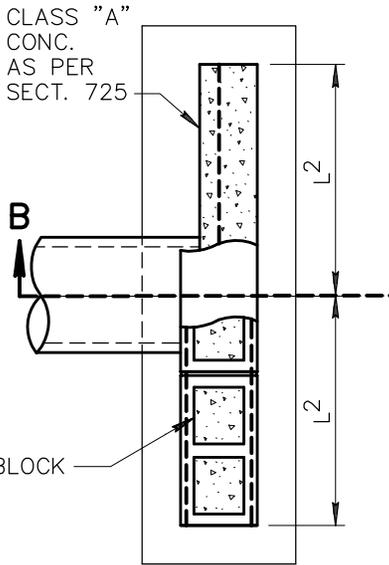

STRAIGHT TYPE

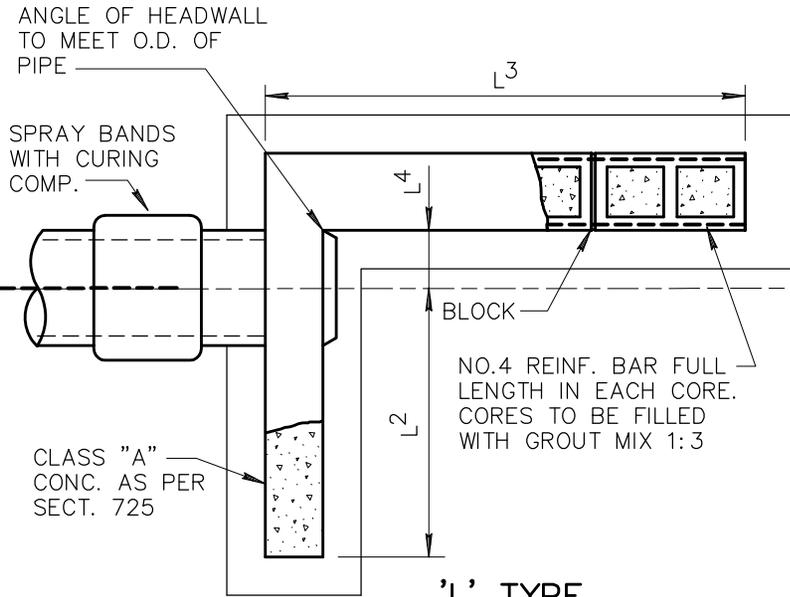

'L' TYPE PLAN

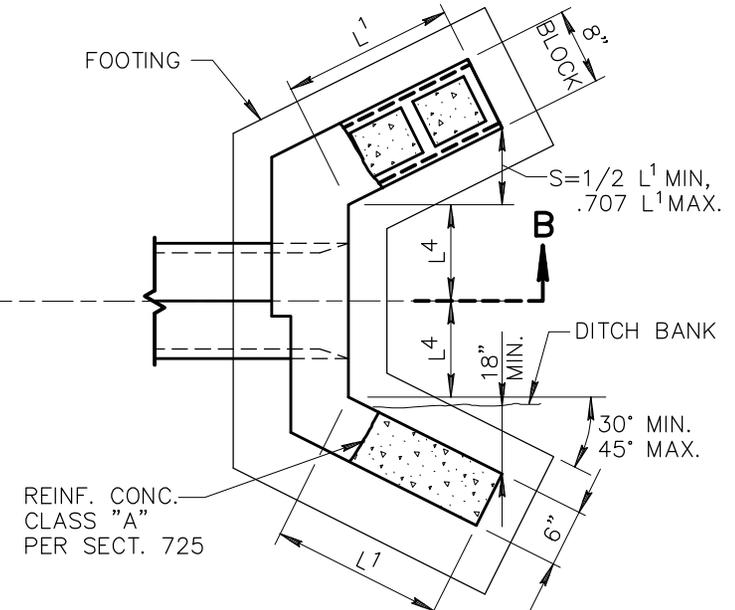

'U' TYPE

DETAIL NO.

501-1



STANDARD DETAIL
ENGLISH


HEADWALL

REVISED


01-01-2012

DETAIL NO.

501-1

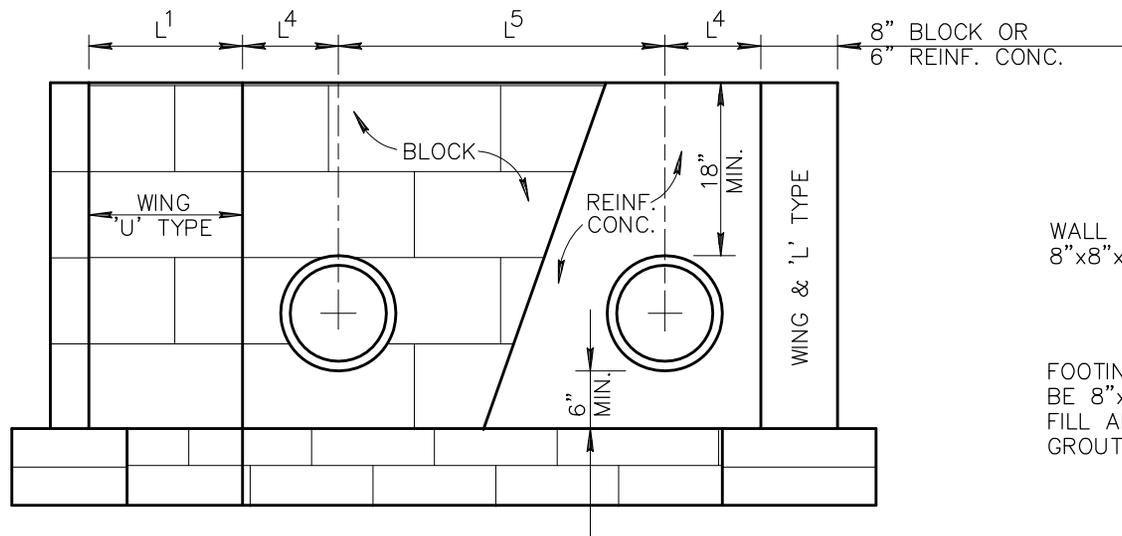

DOUBLE PIPE HEADWALL

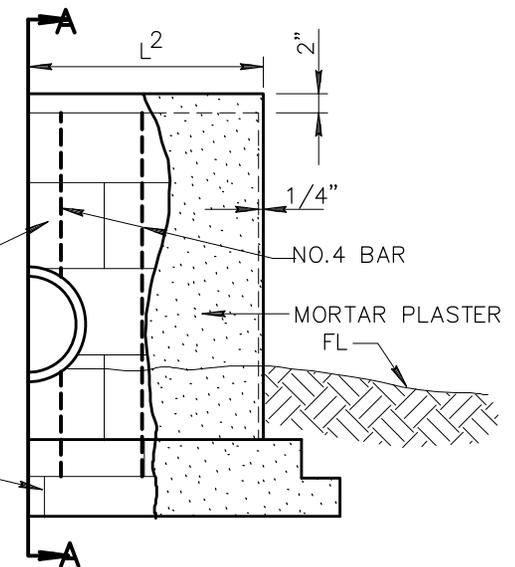

ELEVATION


CONCRETE MASONRY UNITS (BLOCK) HEADWALLS JOINED WITH CEMENT MORTAR PLASTERED BOTH SIDES OF WALL FULL HEIGHT AND SHALL BE CURED PER SECT. 726.

NOTES:

1. ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 505 & 725.
2. CONCRETE MASONRY UNITS (BLOCK) PER SECT. 510, 775 & 776.
3. CONCRETE REINF. SHALL BE NO.4 BAR 12" O.C. BOTH WAYS.







HEADWALL DIMENSIONS					
*NOMINAL PIPE SIZE	L ¹	L ²	L ³	L ⁴	L ⁵
12"	1'-4"	2'-0"	3'-8"	0'-10"	2'-10"
15"	2'-0"	2'-8"	4'-0"	1'-0"	3'-0"
18"	2'-0"	3'-8"	4'-8"	1'-2"	3'-4"
21"	2'-8"	4'-0"	5'-4"	1'-3"	3'-8"
24"	2'-8"	4'-0"	5'-4"	1'-6"	3'-11"
30"	2'-8"	5'-4"	6'-8"	1'-10"	4'-7"
36"	3'-4"	6'-8"	8'-0"	1'-10"	5'-2"
42"	4'-0"	8'-0"	9'-4"	2'-2"	5'-9"

* NOMINAL PIPE SIZE GIVEN FOR REINFORCED CONC. PIPE.

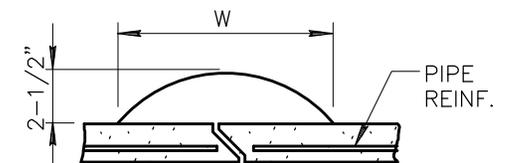

PIPE SIZE	W
12" - 21" INCL.	11"
24" - 42" INCL.	13"

DETAIL "A"

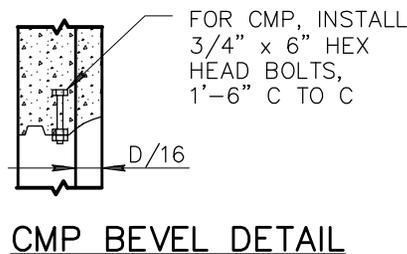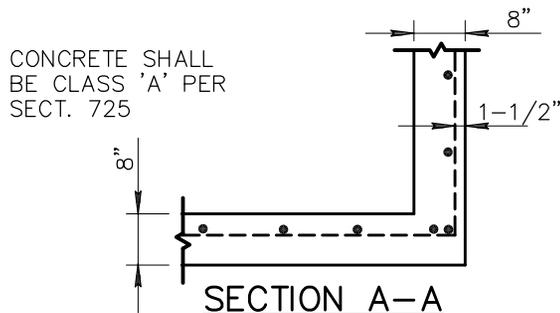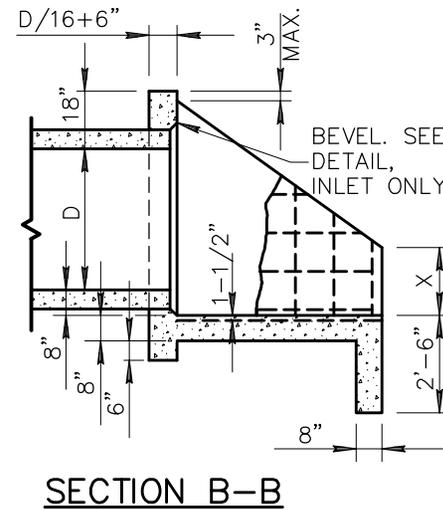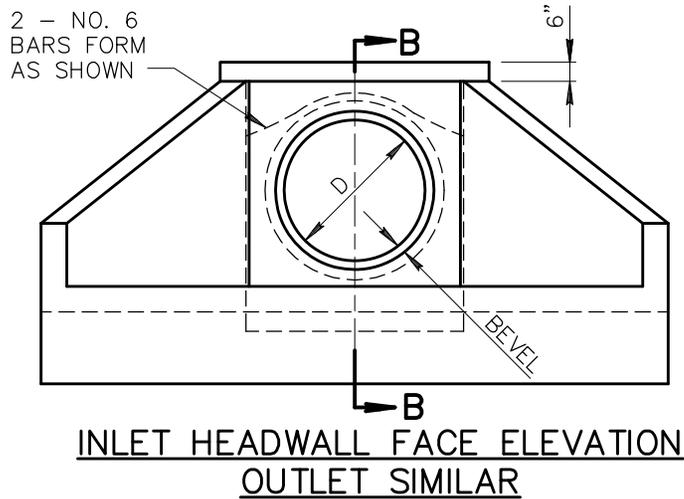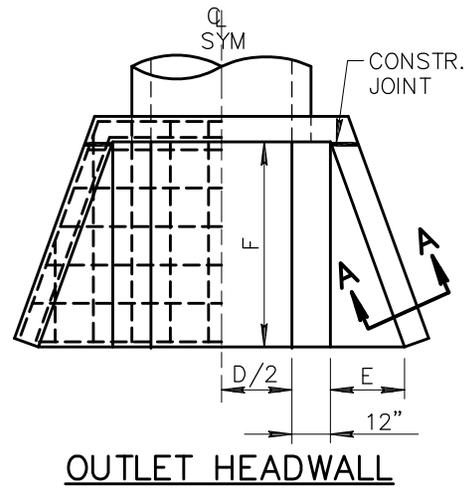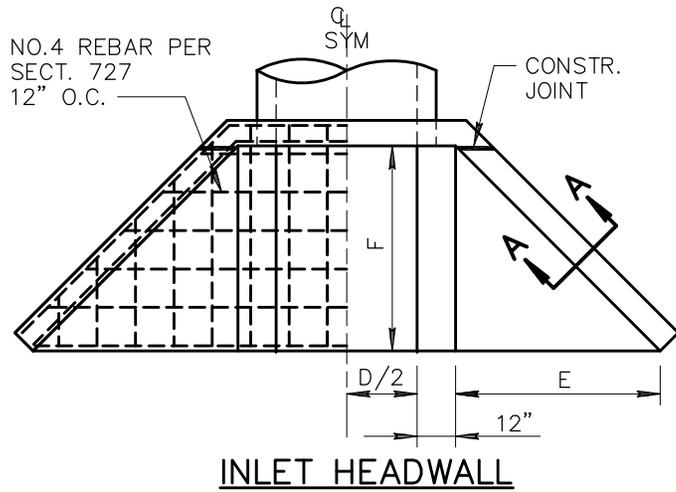

1:1 1/2 EMBANKMENT SLOPE				
D	TYPE *	DIMENSIONS		
		F	E	X
42"	1 (IN)	5'-2"	5'-2"	1'-9"
	2 (OUT)	5'-2"	1'-11"	1'-9"
48"	3 (IN)	5'-8"	5'-8"	1'-11"
	4 (OUT)	5'-8"	2'-1"	1'-11"
54"	5 (IN)	6'-2"	6'-2"	2'-1"
	6 (OUT)	6'-2"	2'-3"	2'-1"
60"	7 (IN)	6'-8"	6'-8"	2'-3"
	8 (OUT)	6'-8"	2'-5"	2'-3"
66"	9 (IN)	7'-2"	7'-2"	2'-5"
	10 (OUT)	7'-2"	2'-7"	2'-5"
72"	11 (IN)	7'-8"	7'-8"	2'-7"
	12 (OUT)	7'-8"	2'-9"	2'-7"
78"	13 (IN)	8'-2"	8'-2"	2'-9"
	14 (OUT)	8'-2"	3'-0"	2'-9"
84"	15 (IN)	8'-8"	8'-8"	2'-11"
	16 (OUT)	8'-8"	3'-2"	2'-11"

1:4 EMBANKMENT SLOPE				
D	TYPE *	DIMENSIONS		
		F	E	X
42"	17 (IN)	8'-8"	8'-8"	3'-0"
	18 (OUT)	8'-8"	3'-2"	3'-0"
48"	19 (IN)	8'-8"	8'-8"	3'-6"
	20 (OUT)	8'-8"	3'-2"	3'-6"
54"	21 (IN)	8'-8"	8'-8"	4'-0"
	22 (OUT)	8'-8"	3'-2"	4'-0"
60"	23 (IN)	9'-4"	9'-4"	4'-4"
	24 (OUT)	9'-4"	3'-5"	4'-4"
66"	25 (IN)	9'-8"	9'-8"	4'-9"
	26 (OUT)	9'-8"	3'-6"	4'-9"
72"	27 (IN)	9'-8"	9'-8"	5'-3"
	28 (OUT)	9'-8"	3'-6"	5'-3"
78"	29 (IN)	10'-0"	10'-0"	5'-8"
	30 (OUT)	10'-0"	3'-8"	5'-8"
84"	31 (IN)	10'-8"	10'-8"	6'-0"
	32 (OUT)	10'-8"	3'-11"	6'-0"

* (IN) REFERS TO INLET
(OUT) REFERS TO OUTLET

DETAIL NO.

501-3



STANDARD DETAIL
ENGLISH


HEADWALL 42" TO 84" PIPE

REVISED


01-01-1998

DETAIL NO.

501-3

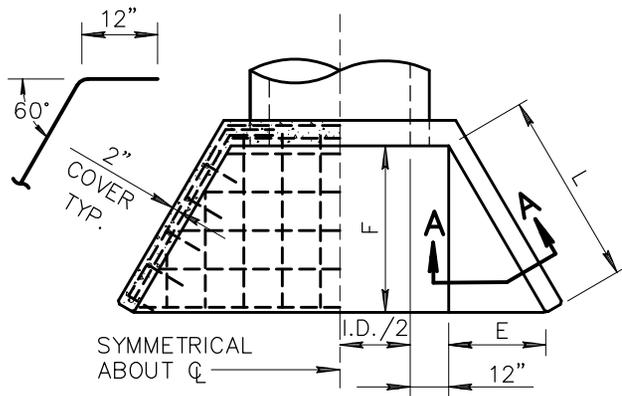


PLAN

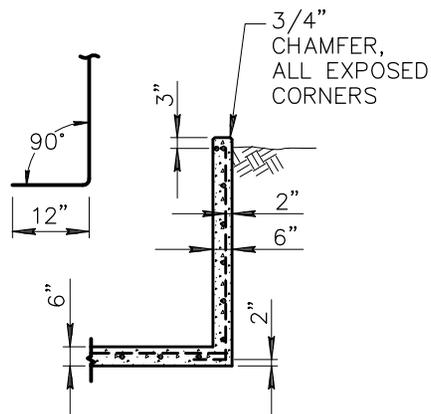


SECTION A-A

2 - NO. 6 BARS BEND TO CONFORM TO PIPE

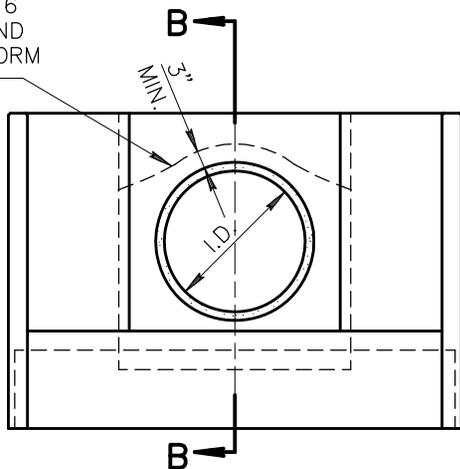




ELEVATION

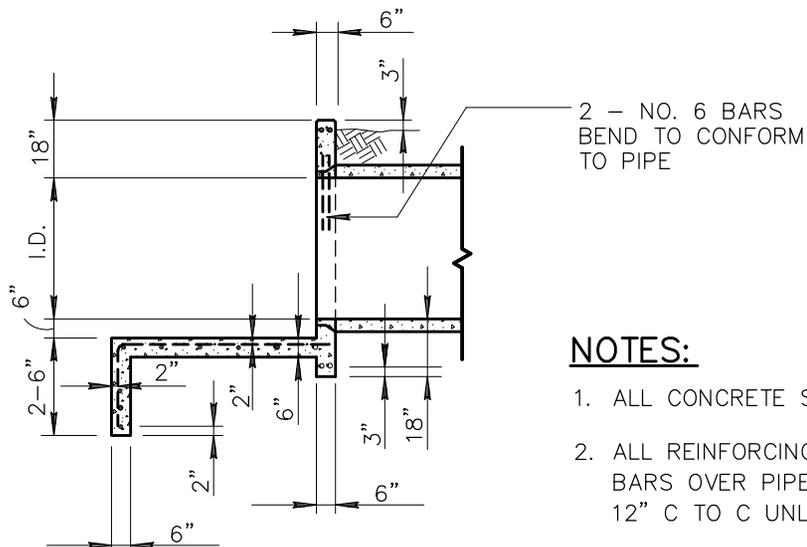


NOTES:

1. ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 725.
2. ALL REINFORCING BARS SHALL BE NO. 4 EXCEPT NO. 6 BARS OVER PIPE. BAR SPACING APPROXIMATELY 12" C TO C UNLESS OTHERWISE NOTED.
3. 30° WING WALL FLARE SHOWN; 45° NORMALLY DESIRABLE.

PIPE I.D.	DIMENSIONS		
	L	E	F (APPROX)
18"	2'-0"	1'-0"	1'-9"
24"	2'-0"	1'-0"	1'-9"
30"	3'-0"	1'-6"	2'-7"
36"	4'-0"	2'-0"	3'-6"
42"	5'-0"	2'-6"	4'-4"
48"	6'-0"	3'-0"	5'-2"
54"	7'-0"	3'-6"	6'-1"
60"	8'-0"	4'-0"	6'-11"

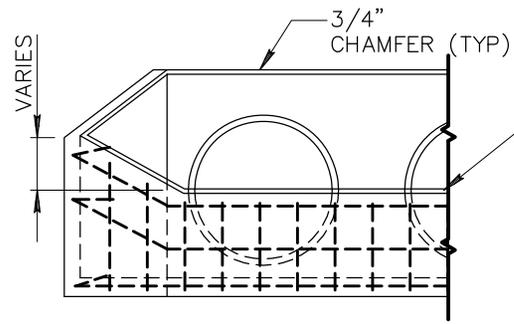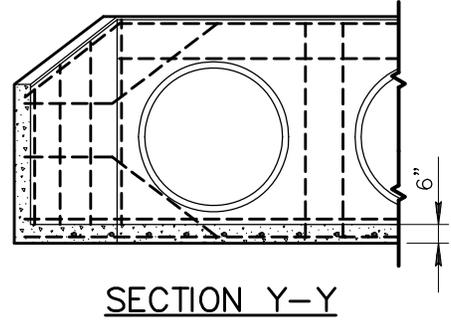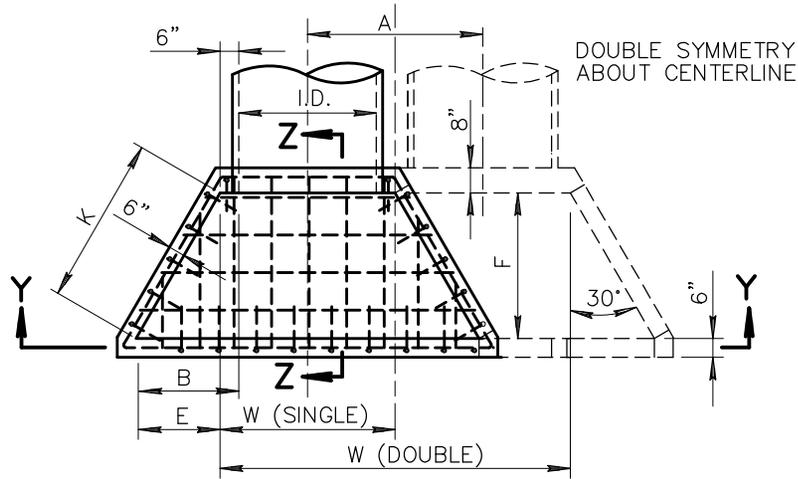

ELEVATION PER PLAN

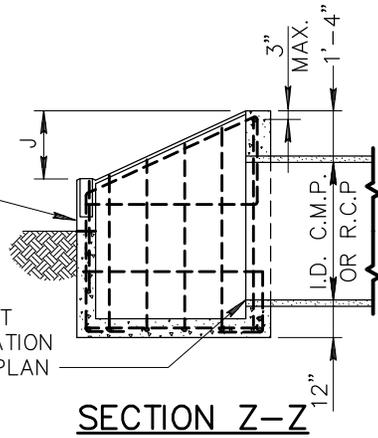

INVERT ELEVATION PER PLAN

PIPE	DIMENSIONS							
	W		A	B	E	F	J	K
	SINGLE	DOUBLE						
18"	2'-6"	5'-2"	2'-8"	1'-3"	0'-9"	1'-3.5/8"	9"	1'-6"
24"	3'-0"	6'-6"	3'-6"	1'-7.1/2"	1'-1.1/2"	1'-11.3/8"	11"	2'-3"
30"	3'-6"	7'-10"	4'-4"	2'-0"	1'-6"	2'-7.1/4"	1'-1"	3'-0"
36"	4'-0"	9'-2"	5'-2"	2'-4.1/2"	1'-10.1/2"	3'-3"	1'-4"	3'-9"
42"	4'-6"	10'-6"	6'-0"	2'-9"	2'-3"	3'-10.3/4"	1'-6"	4'-6"

NOTES:

1. HIGH POINT OF HEADWALL SHALL NOT PROJECT MORE THAN 3" ABOVE SLOPE.
2. ALL CONCRETE SHALL BE CLASS 'A' PER SECT. 725.
3. ALL REINFORCING BARS SHALL BE NO. 4, 12" C TO C AND 3" CLEAR TO INSIDE OF FLOOR AND WALLS.

DETAIL NO.
501-5





STANDARD DETAIL
ENGLISH


HEADWALL DROP INLET

REVISED
01-01-2014

DETAIL NO.
501-5

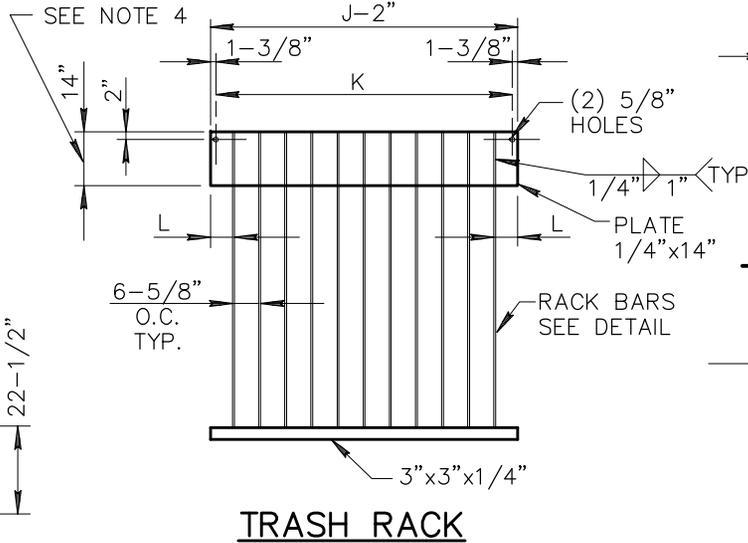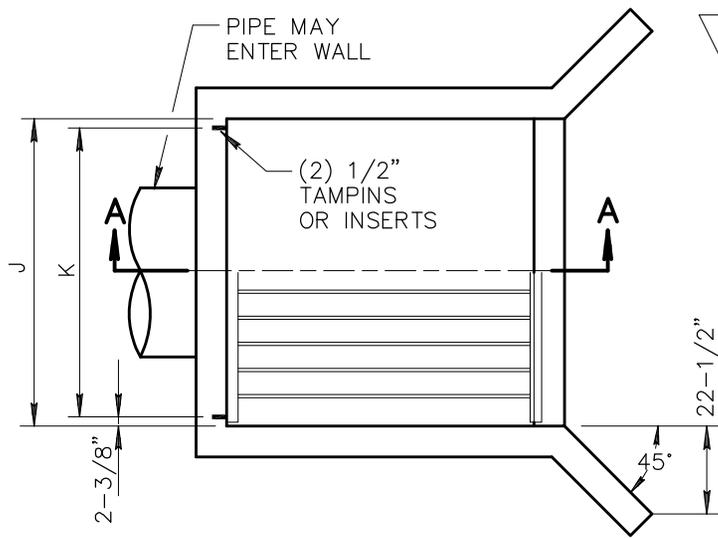


POURED WALLS




NO. 4 REINFORCED BARS 12" O.C. BOTH WAYS, CLASS 'A' CONC PER SECT. 505, 725 & 727.

BLOCK WALLS




BLOCK HEADWALL TO HAVE ONE NO.4 REINF. BAR CENTERED IN EACH CORE FOR FULL HEIGHT AND CORES FILLED WITH CONCRETE OR CEMENT GROUT (3:1 RATIO). ALL BLOCKS TO BE JOINTED WITH MORTAR. PLASTERED ON EXPOSED SURFACES THEN SPRAY WITH WHITE PIGMENTED CURING COMPOUND. SECT. 510, 727 & 776.


TRASH RACK

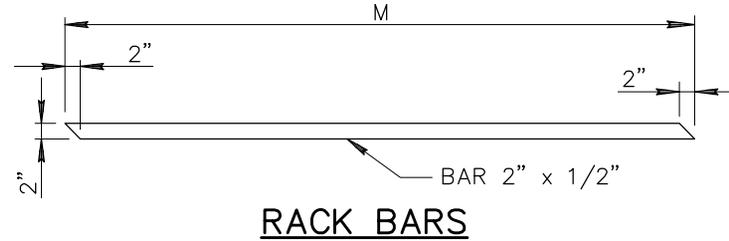

RACK BARS

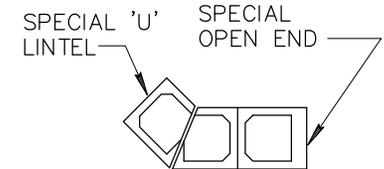

45° BLOCK CORNER

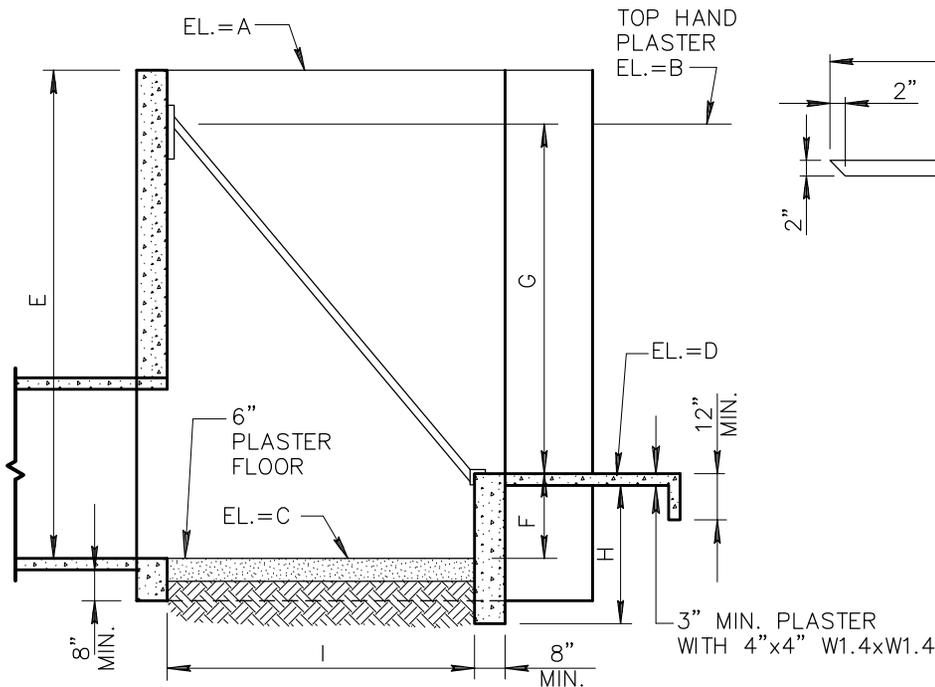

SECTION A-A

NOTES:

1. REMOVE ALL SCALE FROM RACK BARS. METAL SPRAY OR PAINT WITH ONE COAT ZINC CHROMATE OR RED LEAD PRIMER (INDUSTRIAL QUALITY). OVERCOAT WITH GREY INDUSTRIAL ENAMEL SECT. 790.
2. SHAPE, COMPACT AND PLASTER NEW DITCH FROM HEADWALL TO UNDISTURBED EXISTING DITCH. PLASTER TO EXTEND TO MINIMUM ELEVATION NOTED 3 FEET BEYOND CONNECTION TO UNDISTURBED EXISTING DITCH.
3. ELEVATIONS A, B, C & D AND DIMENSIONS E, F, G, H, I, J, K, L & M WILL BE SHOWN ON PLANS. DIMENSIONS SHOULD PROVIDE STANDARD SIZE BLOCK.
4. 14" PLATE SHALL NOT EXTEND BELOW TOP OF PIPE.

DETAIL NO.
502-1



STANDARD DETAIL
ENGLISH

TRASH RACK

REVISED
01-01-1998

DETAIL NO.
502-1

CONCRETE MANSIONRY UNITS (BLOCK)

REINF. CONC. CLASS 'A' PER SECT. 725

STRAIGHT TYPE

'U' TYPE



CONC. LINING THICKNESS 1-1/2" MIN., 2" MAX.

A

12" TYP.


SLOPE 1:1 MIN. 1:1.5 MAX.

A

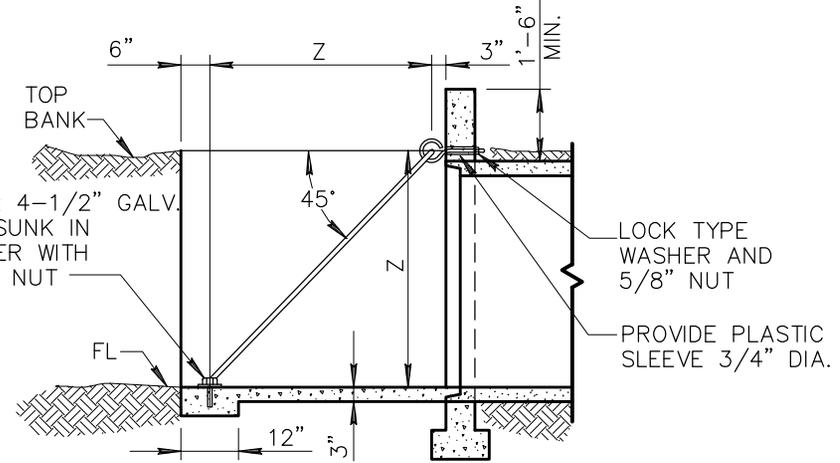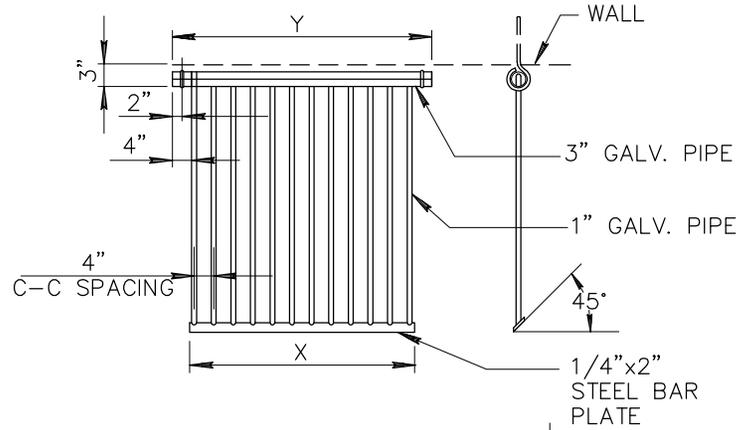

SECTION A-A

TYPE BASED ON PIPE SIZE						
TYPE	PIPE SIZE	NO. OF BARS	LENGTH OF BARS	DIMENSIONS		
				X	Y	Z
A	18"	6	3'-7"	1'-9"	2'-5"	2'-5"
	24"	8	3'-7"	2'-5"	3'-1"	2'-5"
B	30"	10	4'-4 1/4"	3'-1"	3'-9"	2'-11 1/2"
C	36"	10	5'-1 1/2"	3'-1"	3'-9"	3'-6"
D	42"	12	5'-10 5/8"	3'-9"	4'-5"	4'-0 1/2"
E	48"	14	6'-7 3/4"	4'-5"	5'-1"	4'-7"

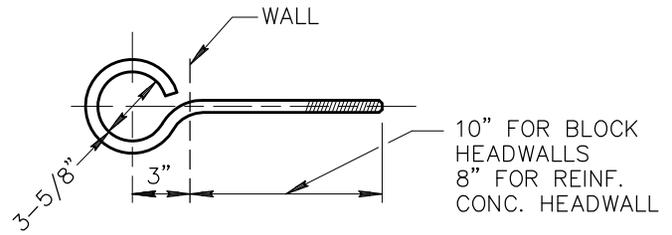

EYE BOLT

DETAIL NO.

502-2



STANDARD DETAIL ENGLISH

TRASH RACK

REVISED

01-01-2004

DETAIL NO.

502-2

NOTE:
 PAINT COVER BOTH SIDES
 ONE PRIME COAT, TWO
 FINISH COATS, SECT.
 790, PAINT NO. 9

10 GAUGE SHEET
 STEEL COVER

HANDLE EXTENDS
 6" BELOW
 TOP WHEN GATE
 IS OPEN

STANDARD
 CONCRETE
 PIPE

CONCRETE AS
 REQUIRED TO
 SECURE GATE

FINISH
 GRADE

VARIABLE

(2) 5/16"
 HOLES
 4" O.C.

1/4" ROD
 HANDLE

2-1/2"

UNLESS OTHERWISE
 SPECIFIED

30"

GATE TYPE,
 SIZE AND NO.
 REQUIRED AS
 GIVEN ON PLANS

SIZE OF PIPE
 AS SHOWN
 ON PLANS

6"

4"

TYPE 'A'

NOTES:

1. BRACE TO BE INSTALLED EVERY 2' FROM TOP OF HEADGATE FRAME. BOTTOM BRACE TO BE HIGH ENOUGH TO ENABLE FULL OPENING OF HEADGATE.
2. INSTALL 1/2" BOLTS INTO LEAD PLUG DRILLED TO WITHIN 1" OF OUT SIDE OF STANDPIPE. SPACERS TO BE INSTALLED AT EACH BOLT BETWEEN HEADGATE FRAME AND INSIDE OF STAND PIPE.
3. LOCATION OF 2" HOLE FOR GATE STEM TO BE DETERMINED AFTER INSTALLATION OF GATE.
4. CONCRETE SHALL BE CLASS A PER SECT. 725.

PAINT ARROW ON OUTSIDE OF STANDPIPE INDICATING DIRECTION "TO OPEN" HEADGATE.

SEE NOTE 2




SEE NOTE 1

GROUT JOINTS
 WATER TIGHT

18"
 MIN.

SIZE OF
 PIPE AS
 SHOWN
 ON PLANS

FORM CONC. AROUND
 END OF PIPE BEHIND
 HEADGATE FRAME

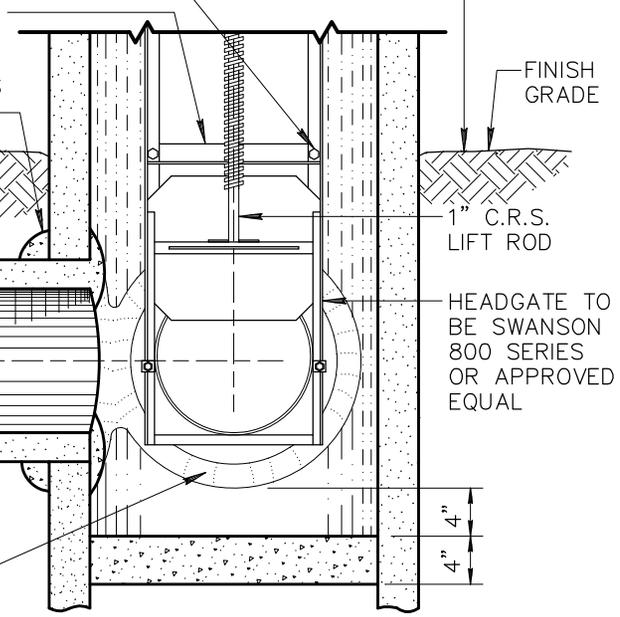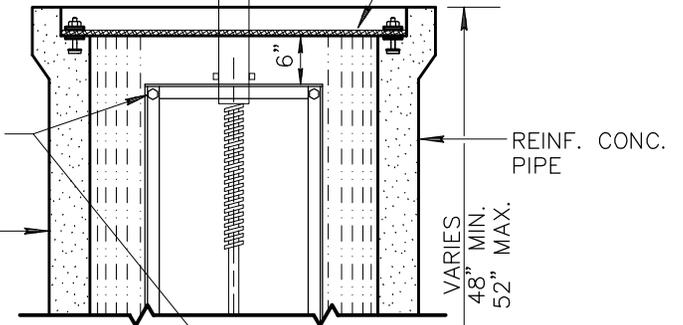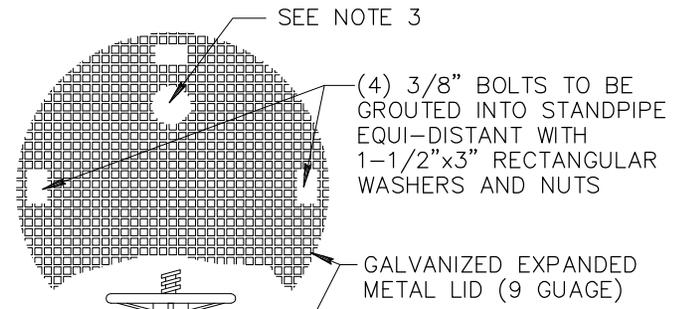

TYPE 'B'

DETAIL NO.

503



STANDARD DETAIL
 ENGLISH



IRRIGATION STANDPIPE

REVISED


01-01-1998

DETAIL NO.


503

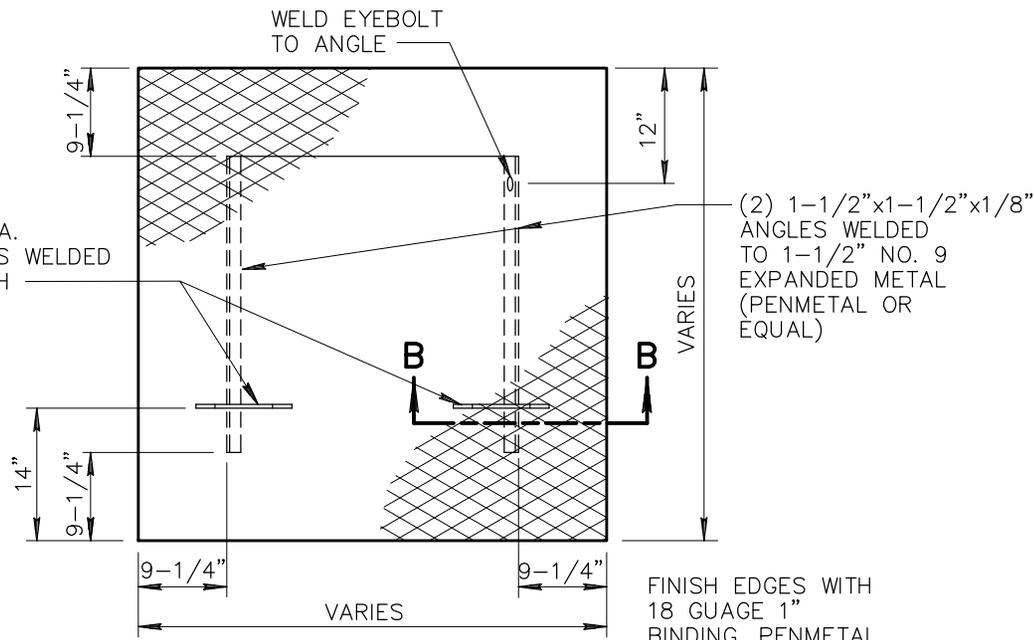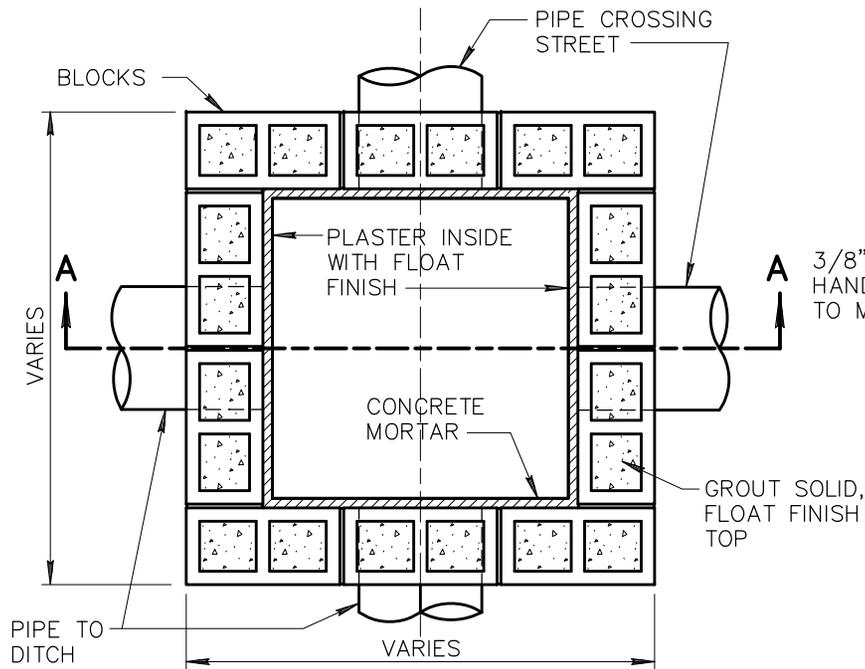

PLAN OF COVER

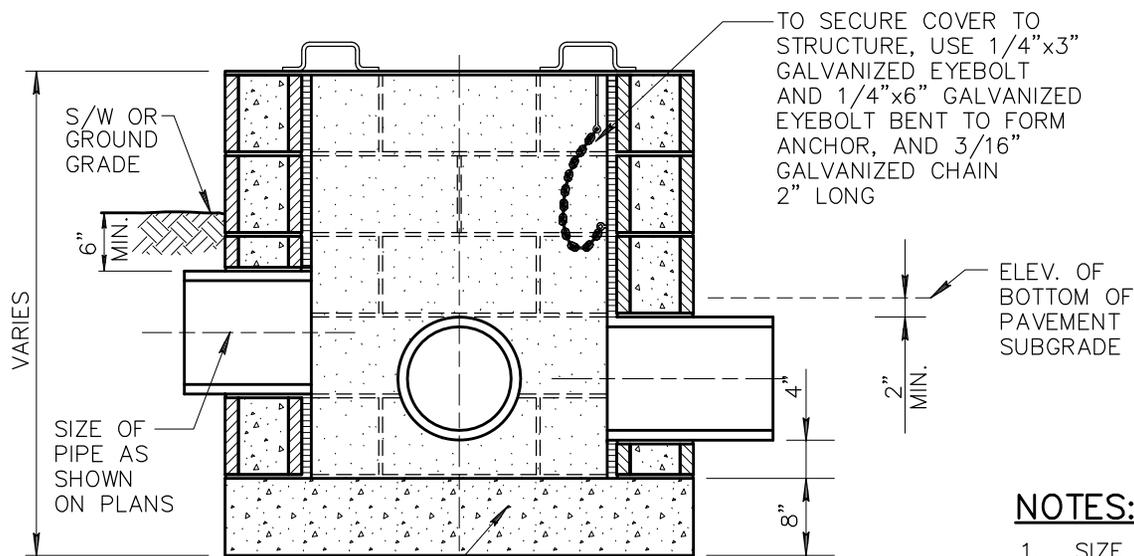

SECTION A-A

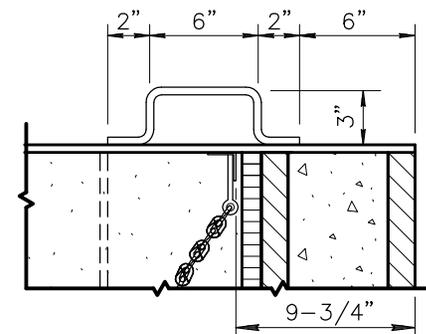

SECTION B-B

NOTES:

1. SIZE OF JUNCTION BOX TO BE DETERMINED BY THE ENGINEER.
2. GATE TYPE, SIZE AND NUMBER REQUIRED AS SHOWN ON PLANS OR AS SPECIFIED.
3. CONCRETE MASONRY UNITS (BLOCK) PER SECT. 510, 775 & 776

DETAIL NO.

504



STANDARD DETAIL
ENGLISH

CONCRETE BLOCK JUNCTION BOX

REVISED


01-01-1998

DETAIL NO.

504

NOTES:




1. A CONCRETE COLLAR IS REQUIRED WHERE PIPES OF DIFFERENT DIAMETERS OR MATERIALS ARE JOINED, OR WHERE THE CHANGE IN ALIGNMENT OR GRADE EXCEEDS THAT ALLOWED FOR ON ORDINARY JOINTS.
2. WHERE PIPES OF DIFFERENT DIAMETERS ARE JOINED WITH A CONCRETE COLLAR, L AND T SHOULD BE THOSE OF THE LARGER PIPE. D=D-1, OR D-2 WHICHEVER IS GREATER.
3. FOR PIPE SIZES NOT LISTED AND LESS THAN 66" USE NEXT SIZE LARGER.
4. OMIT REINFORCING ON PIPE 24" OR LESS IN DIAMETER.
5. WHERE REINFORCING IS REQUIRED, THE DIAMETER OF THE CIRCULAR TIES SHALL BE... OUTSIDE DIAMETER OF PIPE+T.
6. FIELD CLOSURES OF PIPE OF THE SAME DIAMETER AND WITHOUT CHANGE IN GRADE OR ALIGNMENT SHALL BE MADE WITH A CONCRETE COLLAR.
7. CONCRETE SHALL BE CLASS B PER SECT. 725.

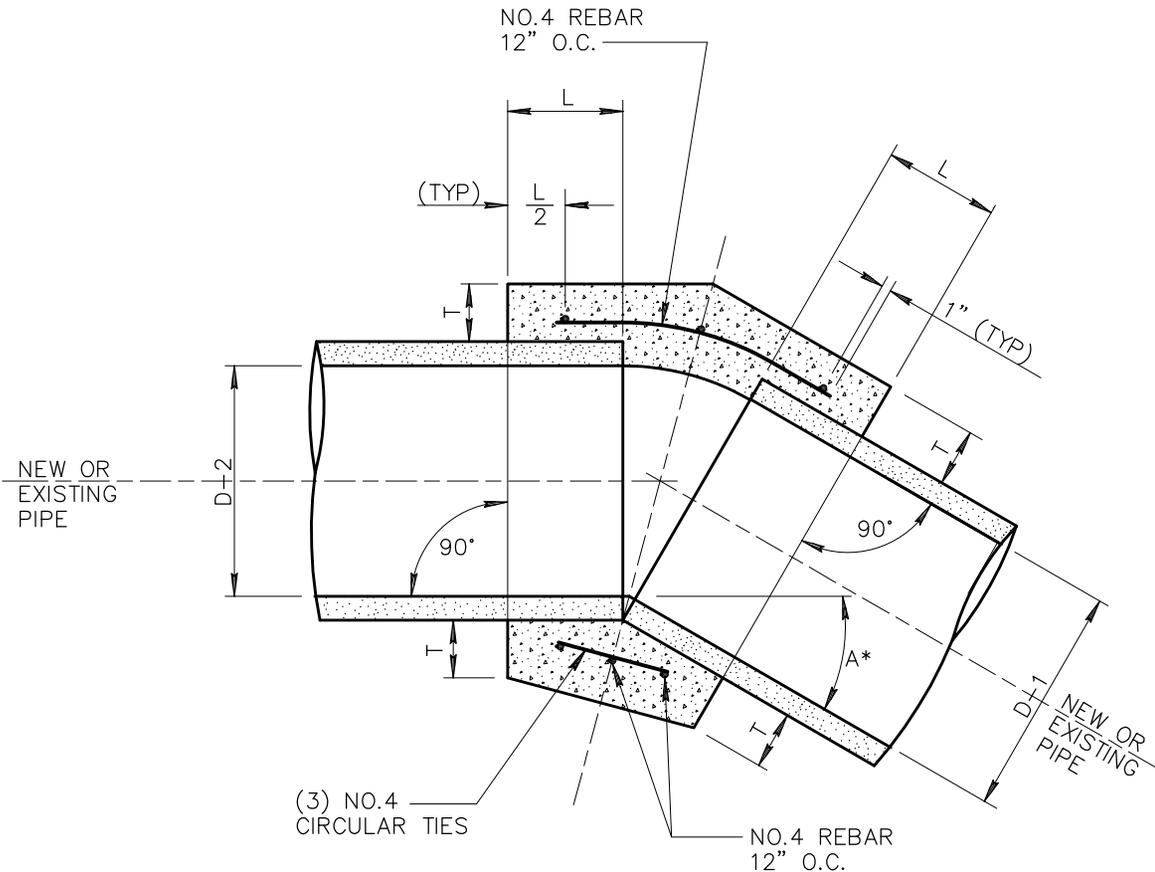

A* = ANGLE OF DEFLECTION

TABLE		
D	L	T
12"	1.0'	4"
18"	1.0'	5"
24"	1.0'	6"
36"	1.5'	8"
48"	1.5'	10"
57"	1.5'	10"
60"	1.75'	11"
66"	1.75'	11"

NOTE:
 CONTRACTOR MAY USE PRECUT FITTINGS IF DESIRED.
 BID ITEM INCLUDES LATERAL PIPE, RISER, PAD, VALVE,
 LABOR AND INCIDENTAL MATERIAL REQUIRED FOR
 INSTALLATION.

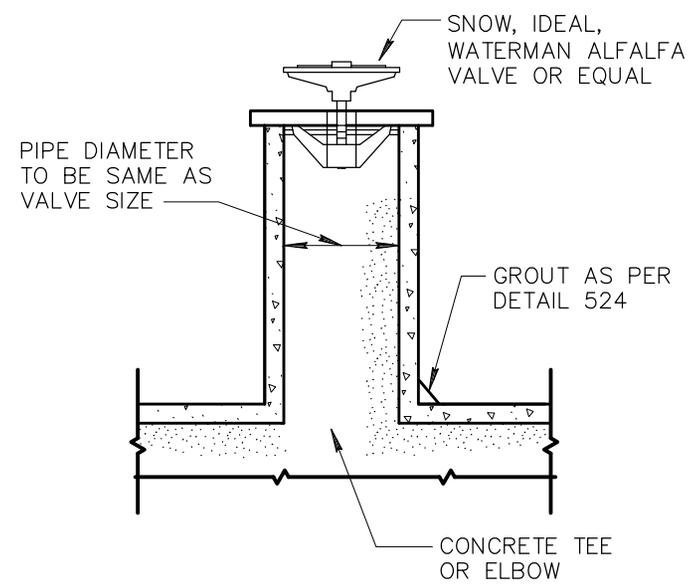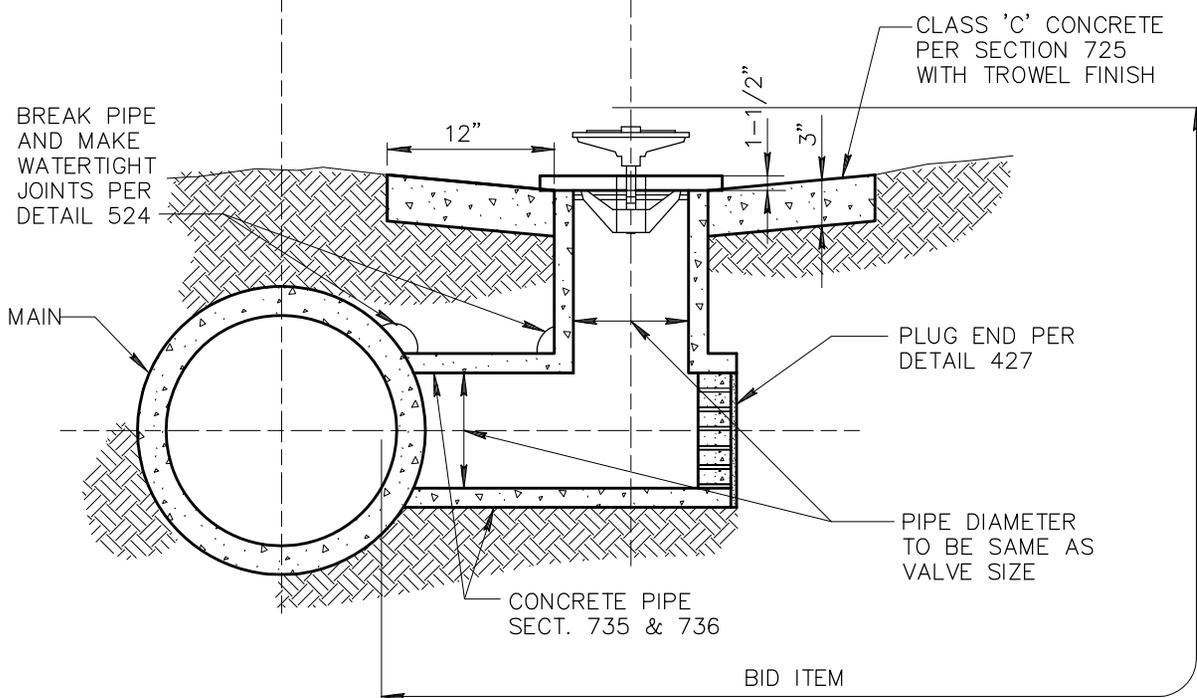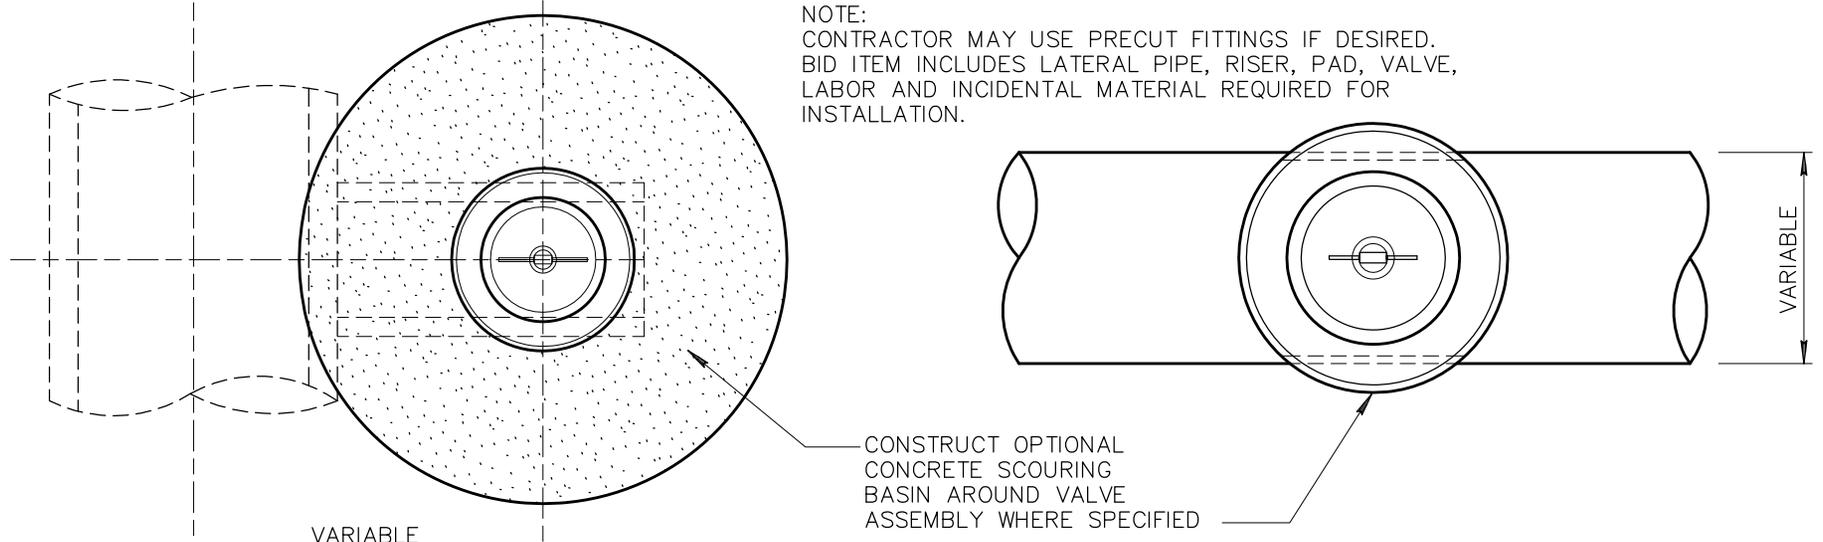

DETAIL NO.
506



STANDARD DETAIL
 ENGLISH


IRRIGATION VALVE INSTALLATION

REVISED
 01-01-1998


DETAIL NO.
506

NOTES:

1. THIS DETAIL SHALL BE REQUIRED WHEN NEW OR EXISTING PIPE INSTALLATIONS WILL BE SUBJECT TO DAMAGE ANYTIME IN THE FUTURE DUE TO LACK OF PROPER COVER, AS DETERMINED BY THE ENGINEER.
2. FOR PIPE OVER 18" I.D. WOOD, METAL OR GYPSUM BOARD FORMS MUST BE USED TO FORM THE SIDES OF THE ENCASEMENT. GYPSUM BOARD FORMS MAY BE LEFT IN THE GROUND BELOW THE TOP OF THE ENCASEMENT. THIS SHALL BE OPTIONAL WITH POURING AGAINST TRENCH WALLS FOR ENCASEMENT OF 18" AND SMALLER PIPE.
3. FOR ALL SITUATIONS WHERE SIDE FORMS ARE USED, TRENCH WALLS SHALL BE OVER-EXCAVATED TO ALLOW SUFFICIENT ROOM TO OPERATE PROPER MECHANICAL COMPACTION EQUIPMENT.
4. CONCRETE WHICH SPILLS BEYOND 12" FROM THE SIDES OF THE PIPE FOR ANY REASON SHALL BE REMOVED BACK TO THE PROPER LINE PRIOR TO BACKFILLING.
5. SEE SECTION 601 FOR TRENCH PREPARATION.
6. CONCRETE TO BE CLASS 'A' PER SECT. 725.
7. COVER TO BE APPROVED BY ENGINEER.

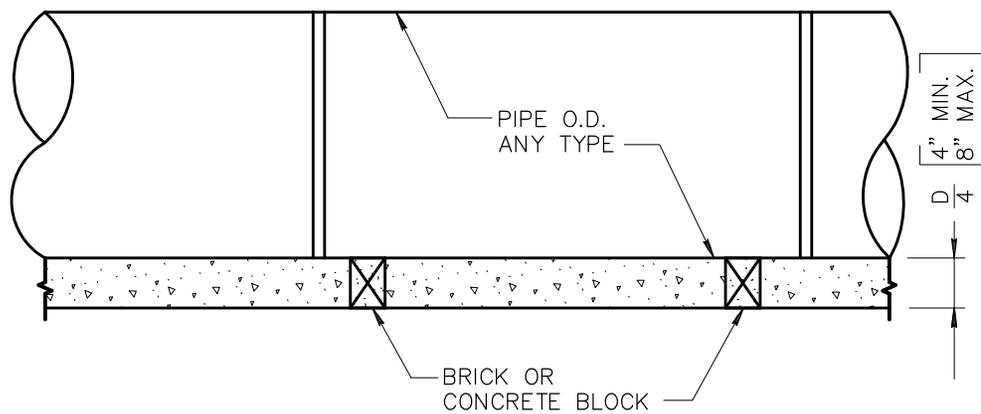

LONGITUDINAL SECTION

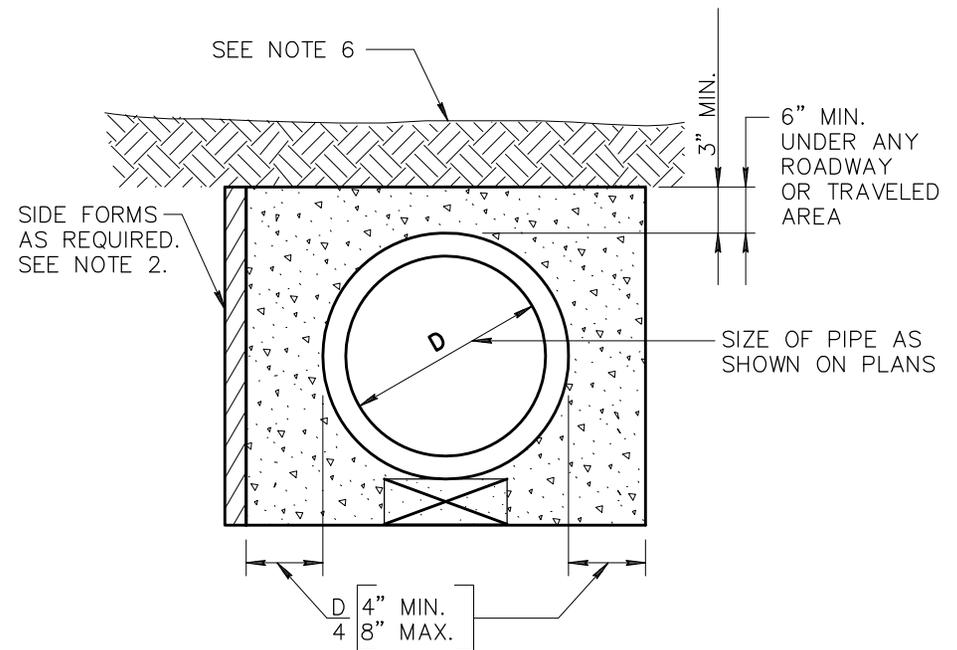

END SECTION

DETAIL NO.

507



STANDARD DETAIL
ENGLISH


**ENCASED CONCRETE PIPE
(FOR SHALLOW INSTALLATION)**

REVISED

01-01-1998


DETAIL NO.

507

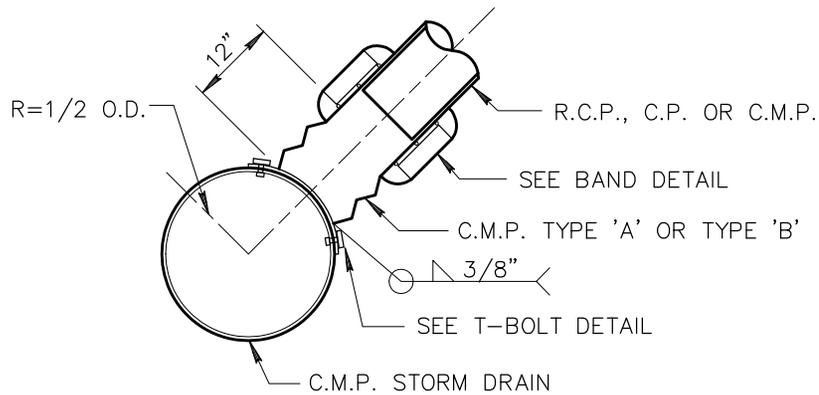


CONNECTOR CROSS SECTION


NOTE:
USE 5/8" WASHER AND NUT, ALL PIECES
(NUTS, WASHERS, AND FABRICATED BOLTS)
TO BE GALVANIZED AS PER A.S.T.M. A-123
LATEST REVISION.

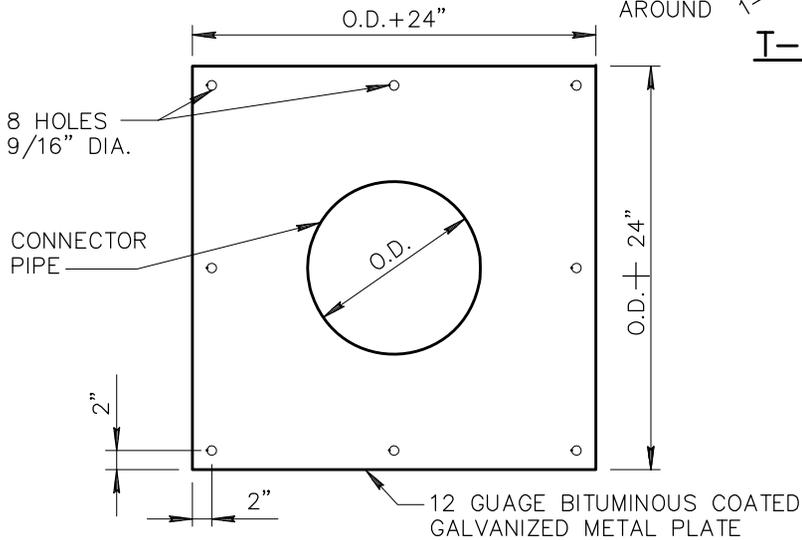


**C.M.P. CONNECTION TO MAIN STORM DRAIN
24" PIPE AND SMALLER**

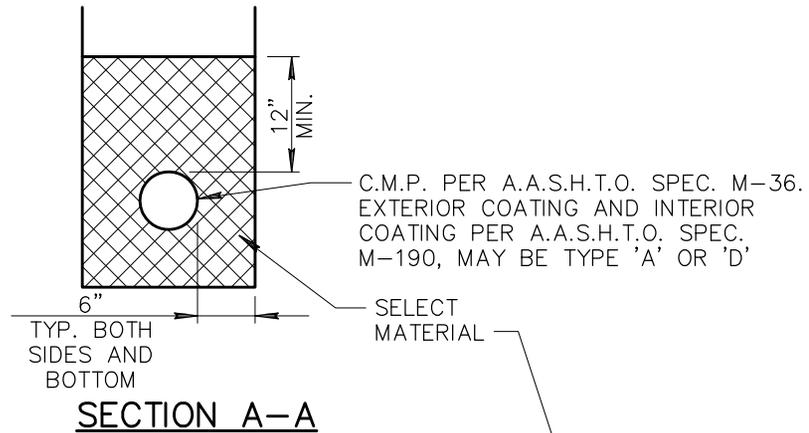


SECTION A-A

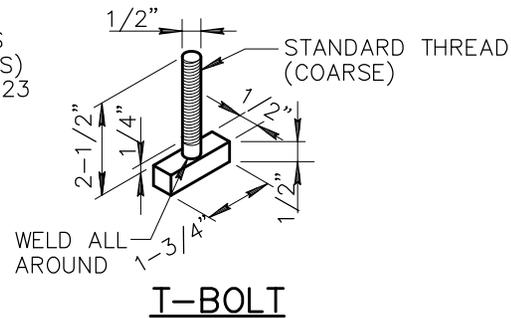

T-BOLT

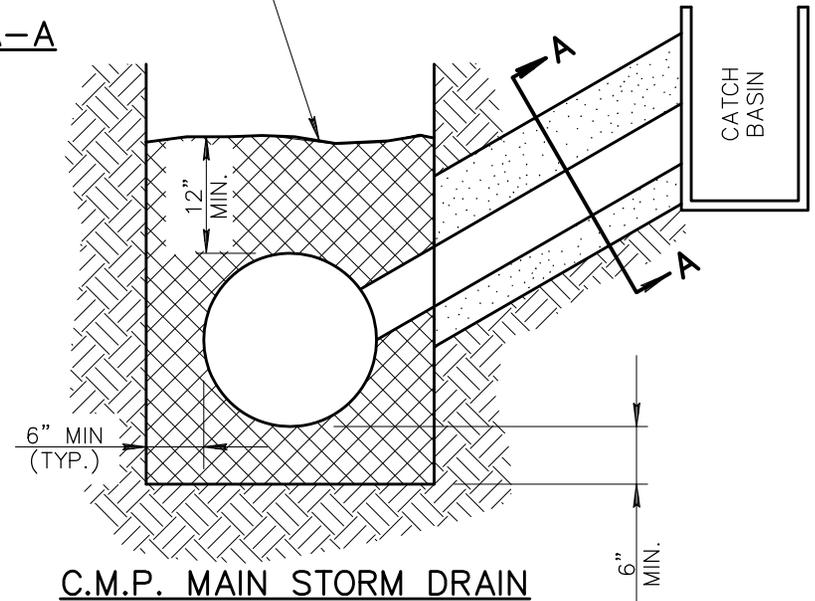

C.M.P. MAIN STORM DRAIN

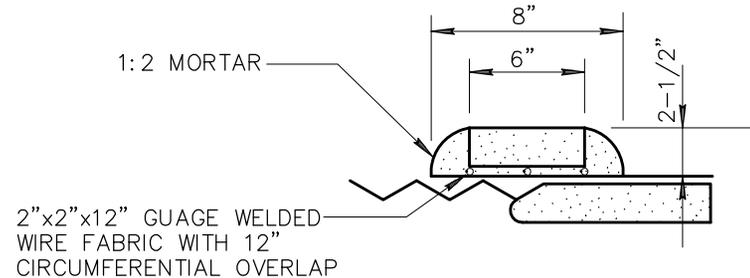

BAND DETAIL

DETAIL NO.

510




STANDARD DETAIL
ENGLISH

**CORRUGATED METAL PIPE
AND INSTALLATION**

REVISED
01-01-1998

DETAIL NO.


510

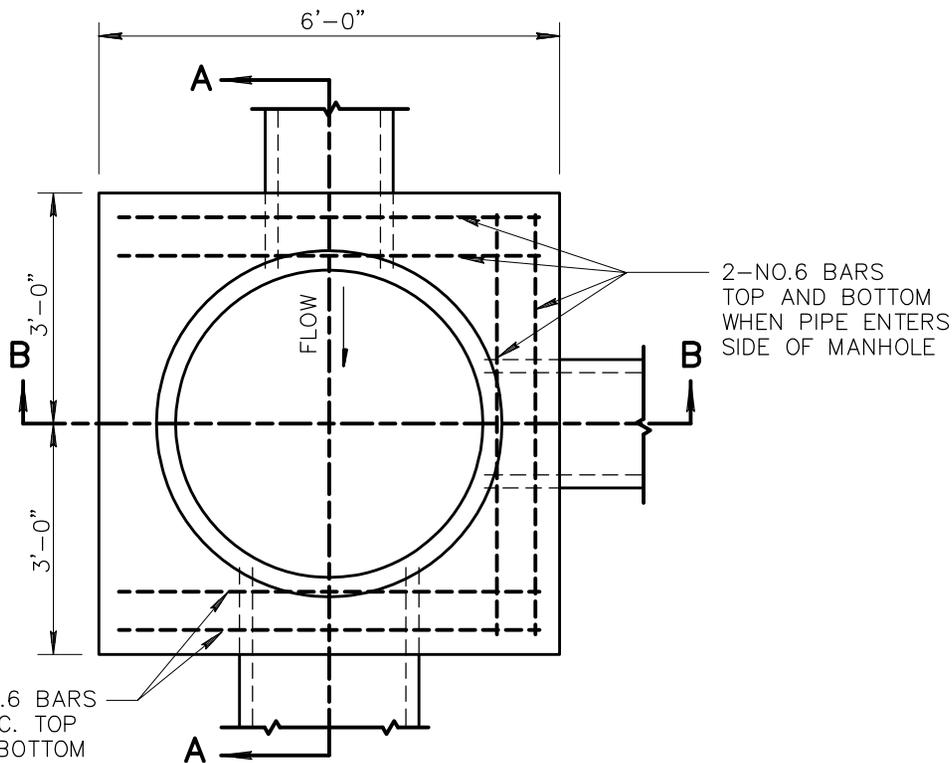


PLAN

NOTES

1. ALL CONCRETE TO BE CLASS 'A' PER SECT. 725, 505.
2. MATCH SPRING LINES OF PIPE ENTERING MANHOLE UNLESS OTHERWISE NOTED.
3. CUT PIPES TO ALLOW SETTING OF 4' DIA. CYLINDRICAL FORM FROM 6" ABOVE MAIN LINE PIPE TO SPRING LINE. CUT PIPE 2" LARGER THAN FORM TO ALLOW 2" CONCRETE OVER ENDS OF ALL CUT PIPE.
4. INVERT AND BASE OF MANHOLE TO BE POURED AND INVERT TO BE SHAPED BY HAND TO MAKE SMOOTH TRANSITION. FINISH WITH RUBBER FLOAT.
5. CENTER MANHOLE ON PIPE JOINT WHERE PIPE CHANGES SIZES, LEAVING A GAP OF 12" MINIMUM, 24" MAXIMUM.

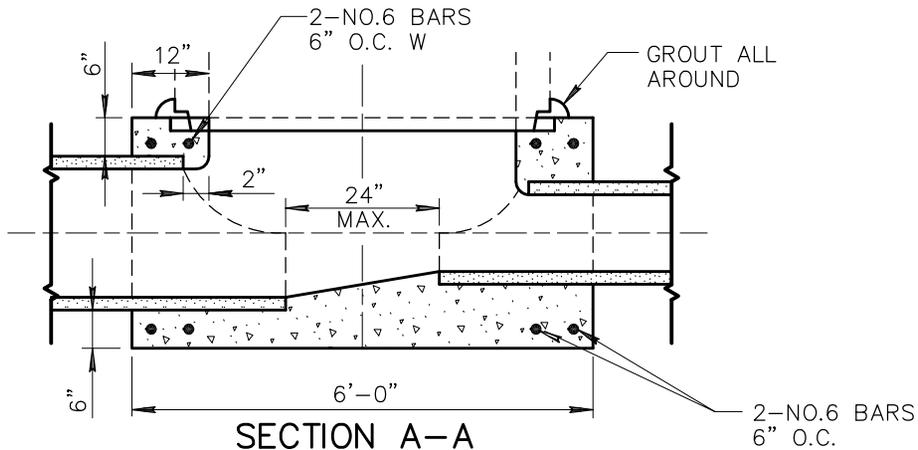

SECTION A-A

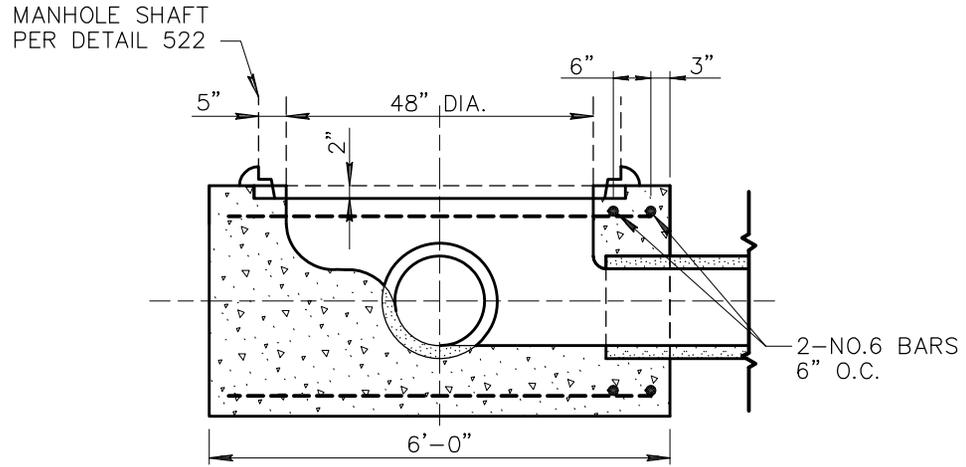

SECTION B-B

DETAIL NO.
520




STANDARD DETAIL
ENGLISH

**STORM DRAIN MANHOLE BASE
(48" AND SMALLER)**

REVISED
01-01-1998

DETAIL NO.
520

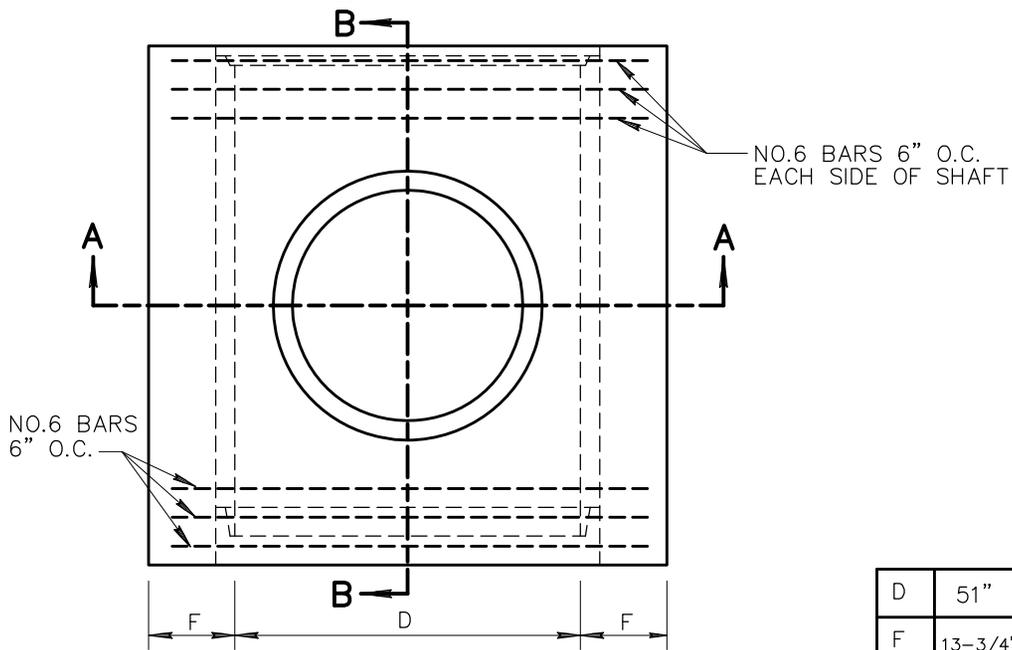


PLAN

NOTES:


1. LINE PIPE AND STUB MAY BE CAST MONOLITHICALLY OR STUB MAY BE CAST ON TO LINE PIPE SECTION PRIOR TO COMPLETE CURING.
2. ALL LINE PIPE REINFORCEMENT SHALL BE TURNED UP INTO STUB.
3. THE VERTICAL STUB TO BE A.S.T.M. C-76 CLASS II WALL 'A' AND THE HORIZONTAL PIPE TO BE EQUAL TO STRENGTH OF PIPE ENTERING MANHOLE.
4. ALL REINFORCING STEEL SHALL CLEAR FACE OF CONCRETE BY 1-1/2" UNLESS SHOWN OTHERWISE.
5. CONCRETE ENCASEMENT SHALL BE CLASS 'A' PER SECT. 725 AND 505.

TABLE OF VALUES FOR 'F' & 'D'

D	51"	54"	57"	60"	63"	66"	69"	72"	78"	84"	90"	96"
F	13-3/4"	14-1/2"	15"	15-1/2"	16-1/4"	16-3/4"	17-1/2"	18"	19-1/4"	20-1/2"	21-3/4"	23"

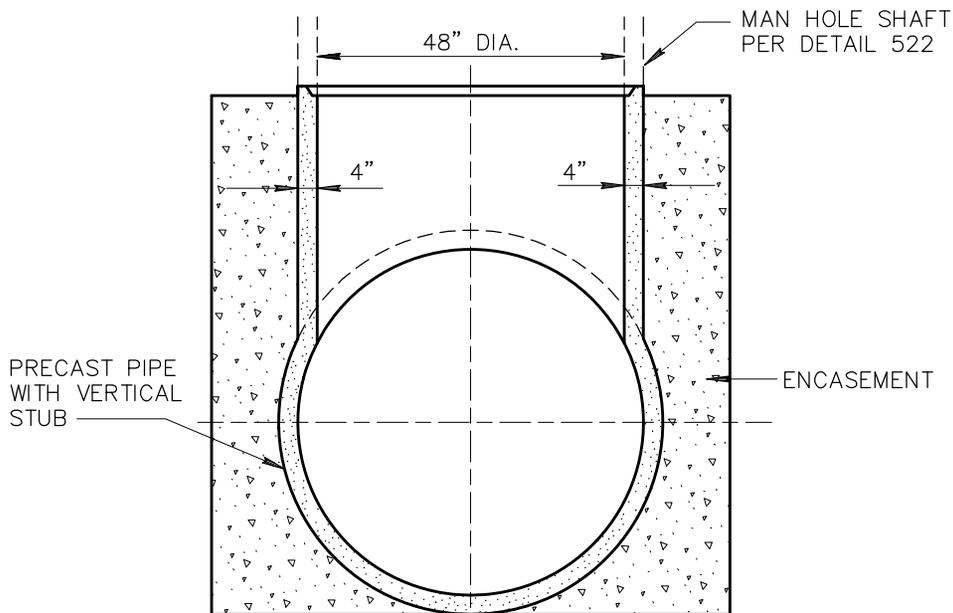

SECTION A-A

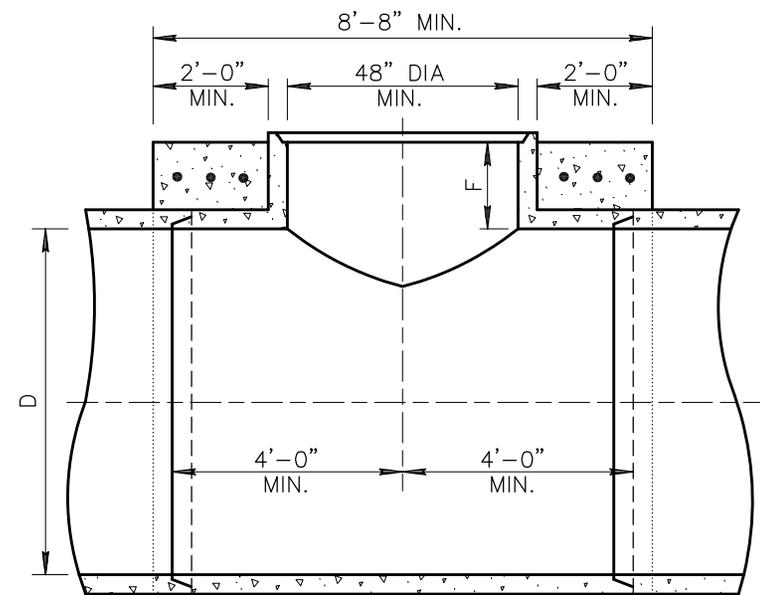

SECTION B-B

DETAIL NO.

521



STANDARD DETAIL
ENGLISH


**STORM DRAIN MANHOLE BASE
(51" OR LARGER)**

REVISED


01-01-1998

DETAIL NO.

521

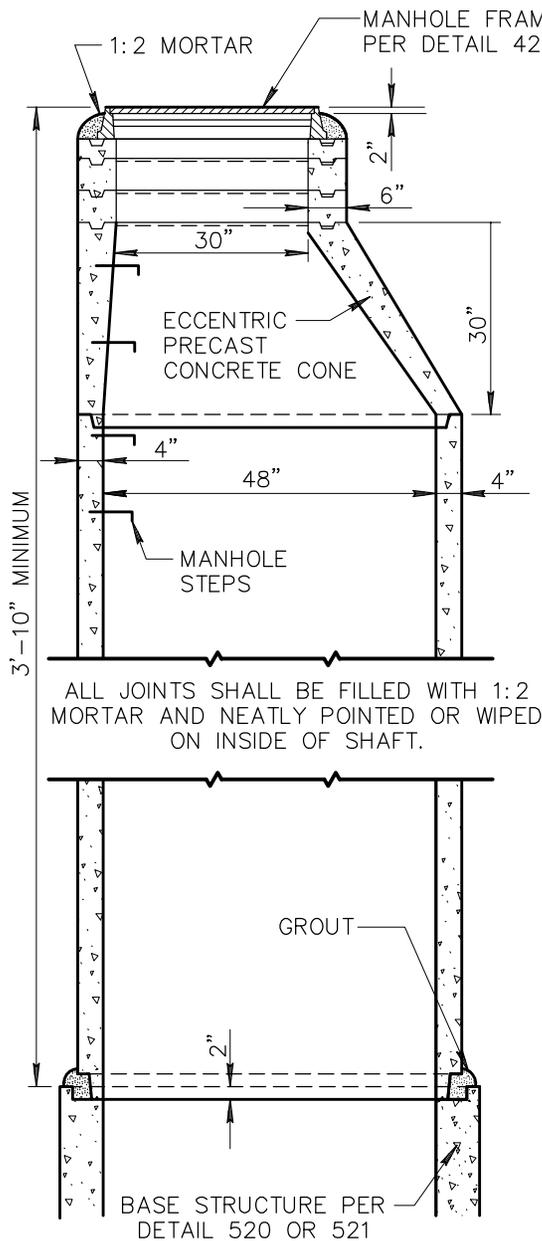


VERTICAL SECTION OF ECCENTRIC MANHOLE SHAFT

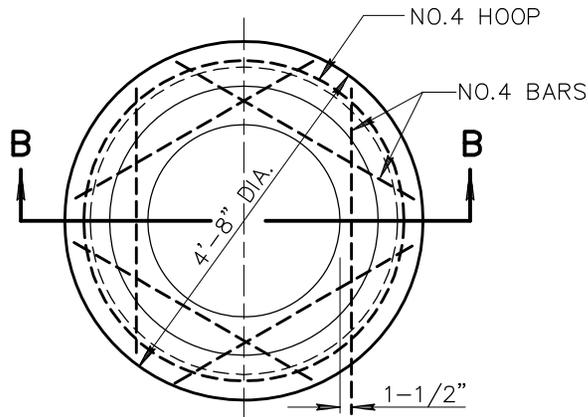

PLAN

USE WHERE THERE IS 3'-10" OR LESS COVER OVER PIPE

MANHOLE FRAME AND COVER PER DETAIL 423 AND 424

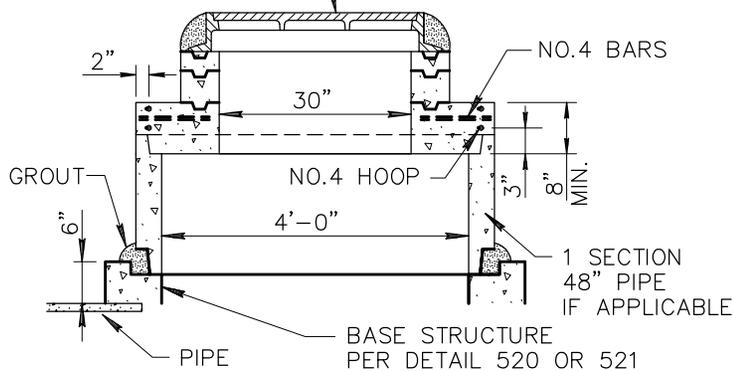


SECTION B-B

SHALLOW MANHOLE

NOTES:

1. PRECAST CONCRETE CONES AND SECTIONS TO BE A.S.T.M. C-478.
2. BRICK MAY BE USED IN LIEU OF OR IN COMBINATION WITH CONCRETE ADJUSTING RINGS.
3. PRECAST CONCRETE SECTIONS 48" DIA PIPE MAY BE FURNISHED IN STANDARD LENGTHS.
4. UNLESS OTHERWISE SHOWN ON PLANS, USE (2) 2-1/2" PRECAST CONCRETE ADJUSTING RINGS ON IMPROVED STREETS AND (4) 2-1/2" RINGS ON UNIMPROVED STREETS.
5. MANHOLE STEPS SHALL BEGIN 2'-0" BELOW FINISHED GRADE AND CONTINUE AT 12" INTERVALS TO APPROXIMATELY 2' ABOVE MANHOLE SHELF. (AS REQUIRED BY AGENCY.)
6. CONCRETE SHALL BE CLASS A PER SECTION 725 AND 505.

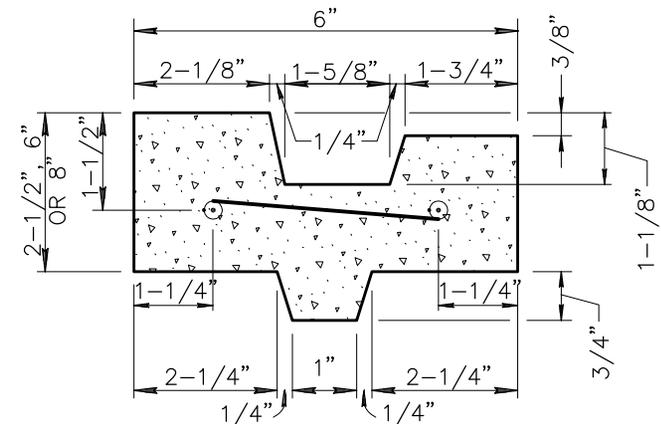

2-1/2" RINGS SHALL BE REINFORCED WITH TWO 1/4" ROUND STEEL HOOPS; 6" AND 8" RINGS SHALL BE REINFORCED WITH FOUR 1/4" HOOPS, TIED WITH NO. 14 A.S. & W. GAUGE WIRE 8" O.C.

REINFORCED CONCRETE ADJUSTING RING

DETAIL NO.

522



STANDARD DETAIL
ENGLISH


STORM DRAIN MANHOLE SHAFT

REVISED
01-01-1998

DETAIL NO.

522


GROUND MATCH MARK
1/4" W x 1/8" D

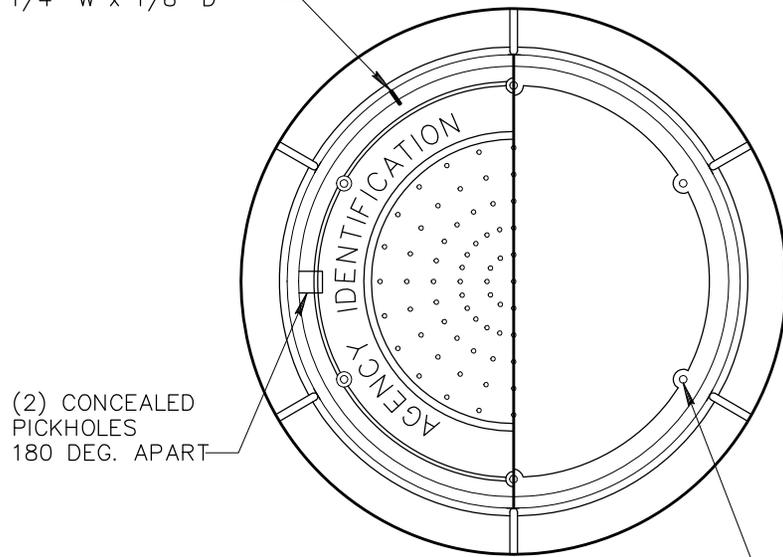


(2) CONCEALED
PICKHOLES
180 DEG. APART

NOTES:

1. DRILL (6) HOLES IN 30" COVER (4 HOLES IN 24" COVER) 17/32" CORED RECESS FOR 1/2" CAPSCREWS. SPACE EQUALLY (304 S.S.)
2. DRILL (6) HOLES IN 30" FRAME (4 HOLES IN 24" FRAME) AND TAP FOR 1/2" - NATIONAL COARSE BOLT (HEX HEAD).
3. COVER AND FRAME MUST BE MATCH MARKED, DRILLED AND TAPPED IN SETS.
4. DIMENSIONS, LETTERING, WEIGHTS AND MATERIALS SHALL CONFORM TO DET. 424.
5. REFER TO DETAIL 523-1 FOR INSTALLATION PROCEDURES.




BOLT HOLE DETAIL



PICKHOLE DETAIL

COVER SECTION

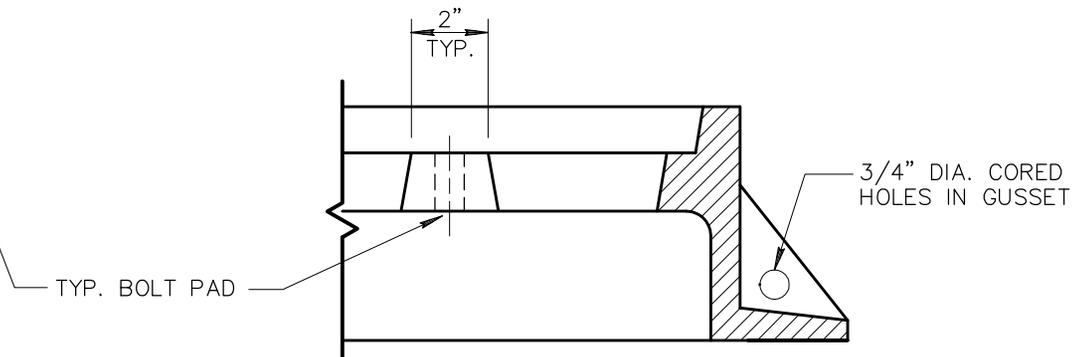

TYP. BOLT PAD

3/4" DIA. CORED HOLES IN GUSSET

FRAME SECTION

DETAIL NO.

523-2



STANDARD DETAIL
ENGLISH

PRESSURE MANHOLE


REVISED

01-01-1998


DETAIL NO.

523-2

TOP VIEW

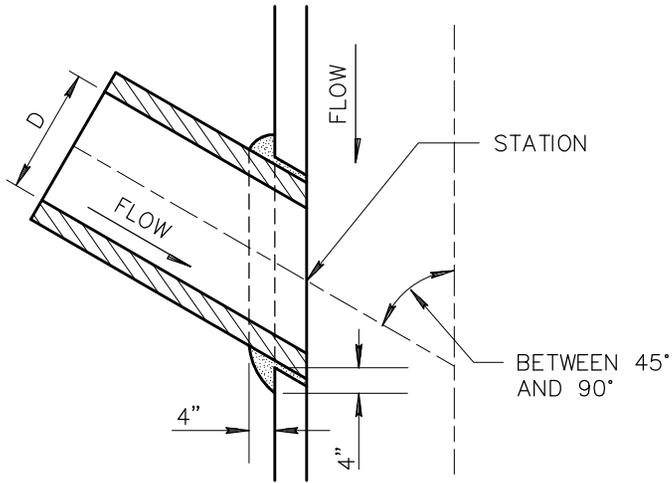


SECTION A-A

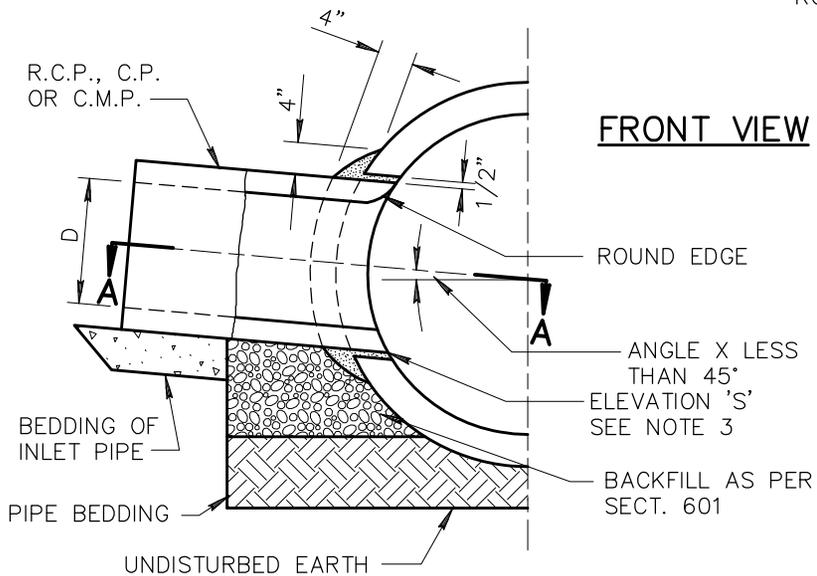

**SIDE INLET
TYPE 1**

FRONT VIEW

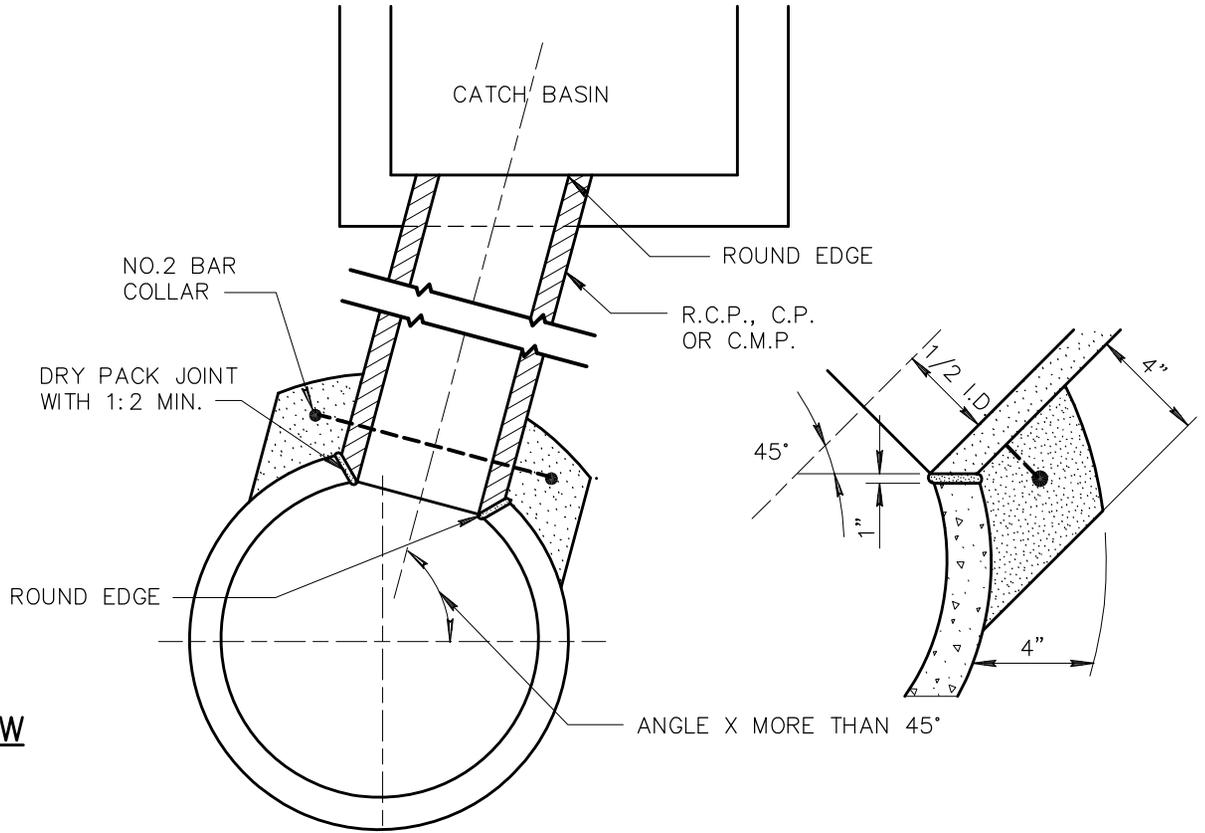

**CATCH BASIN ABOVE STORM DRAIN
TYPE 2**

NOTES:

1. D SHALL BE 24" OR LESS. FOR LARGER VALUE OF D USE MANHOLE OR JUNCTION STRUCTURE.
2. IN NO CASE SHALL THE OUTSIDE DIAMETER OF THE INLET EXCEED ONE HALF THE INSIDE DIAMETER OF THE MAIN STORM DRAIN.
3. CENTERLINE OF INLET SHALL BE ON RADIUS OF MAIN STORM DRAIN EXCEPT WHEN ELEVATION 'S' IS SHOWN ON PLANS.
4. THE MINIMUM OPENING INTO THE STORM DRAIN SHALL BE THE OUTSIDE DIAMETER OF THE CONNECTING PIPE PLUS 1".
5. IF ANGLE X FROM HORIZONTAL IS 45° OR LESS USE TYPE 1.
IF ANGLE X IS 45° OR OVER USE TYPE 2.

DETAIL NO.

524



STANDARD DETAIL
ENGLISH


**STORM DRAIN LATERAL
PIPE CONNECTIONS**

REVISED


01-01-1998

DETAIL NO.


524

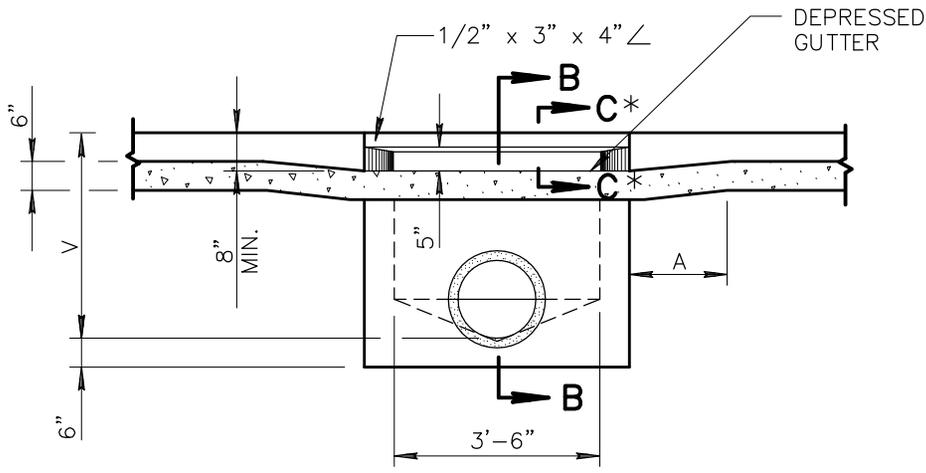

SECTION A-A

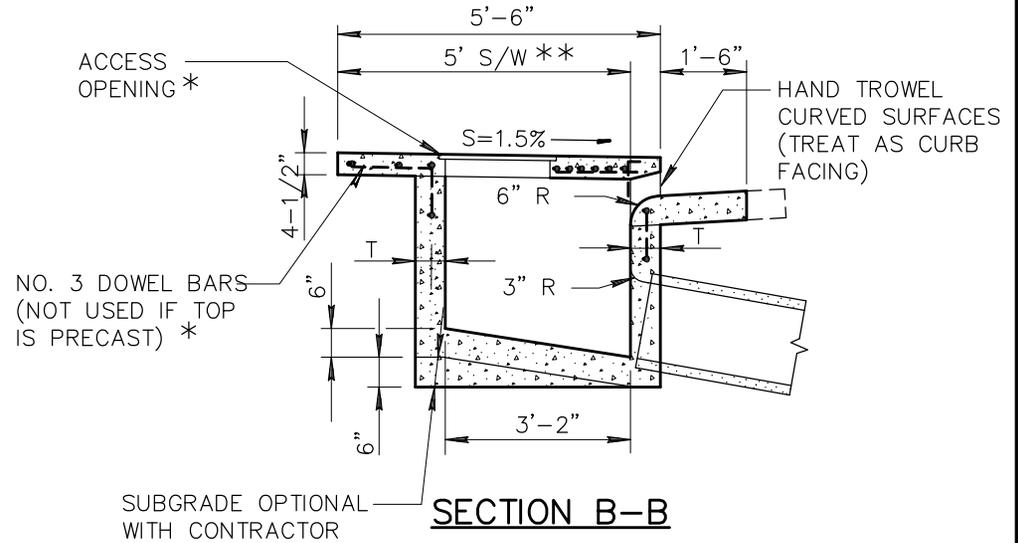

SECTION B-B

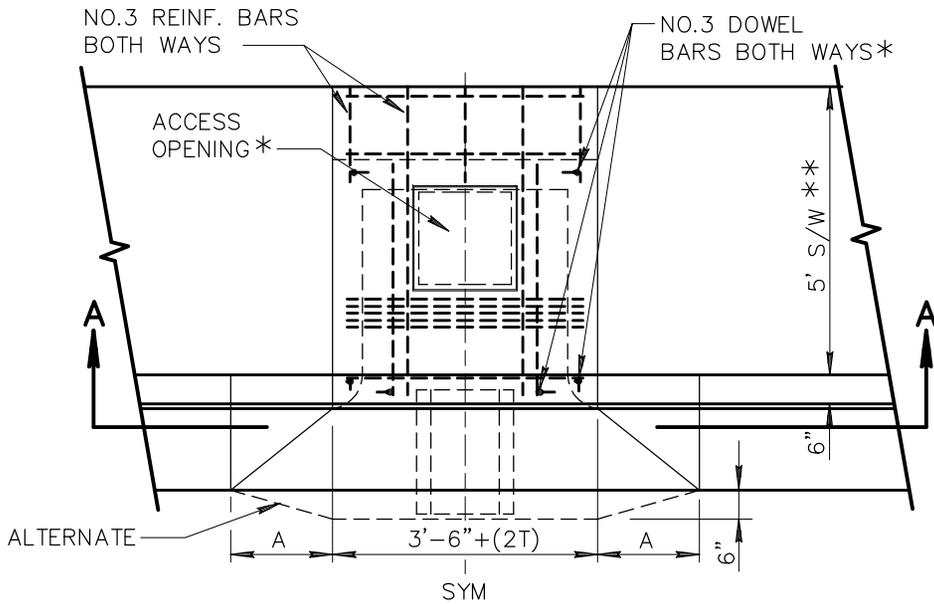

PLAN VIEW

NOTES:


1. THE ENTIRE CATCH BASIN COVER MAY BE POURED IN PLACE OR PRECAST.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. FLOOR OF BASIN SHALL BE TROWELLED TO A HARD SMOOTH SURFACE AND SHALL SLOPE FROM ALL DIRECTIONS TO OUTLET.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 D PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. CONCRETE SHALL BE CLASS A PER SECTION 725.

DIMENSIONS


CURB	A
4"	3'-3"
6"	1'-9"
7"	1'-0"

T=6" IF V=4' OR LESS
 T=8" IF V IS BETWEEN 4' AND 8'
 T=10" IF V IS 8' OR MORE (IF V EXCEEDS 10' SPECIAL DESIGN IS REQUIRED)
 V=3'-6" UNLESS OTHERWISE SPECIFIED.


* SEE DETAILS 536-1 AND 536-2 FOR DETAILS AND SECTIONS COMMON TO ALL CURB OPENING CATCH BASINS.
 ** 4' LOCATIONS WHERE 4' S/W IS REQUIRED.

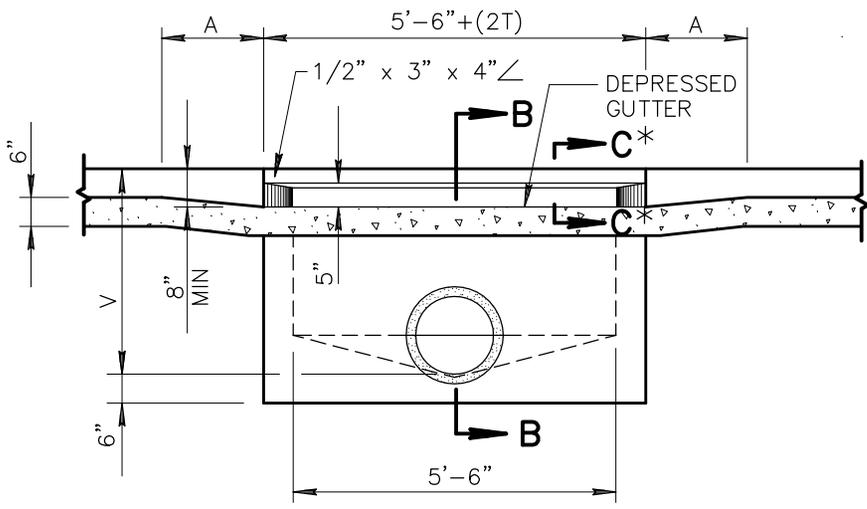

SECTION A-A

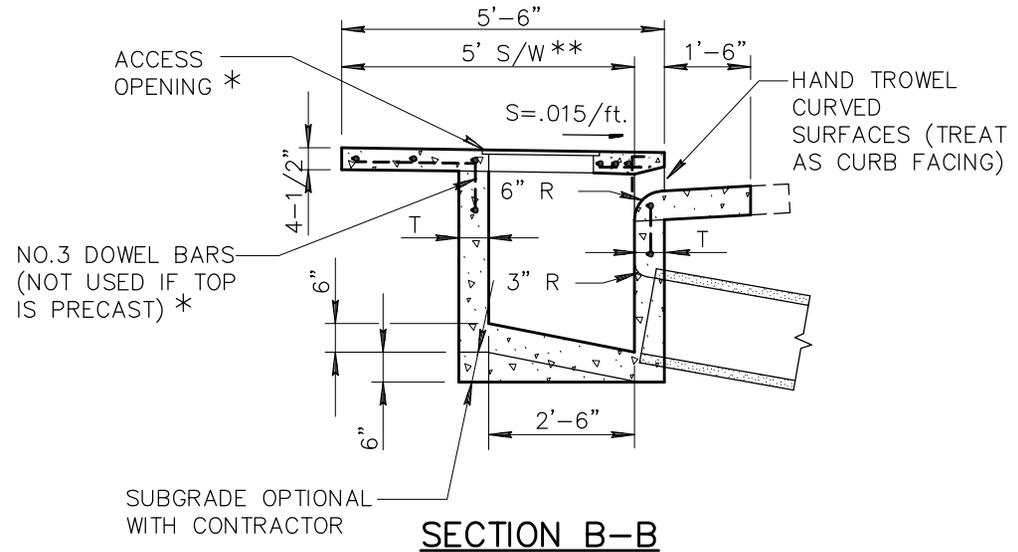

SECTION B-B

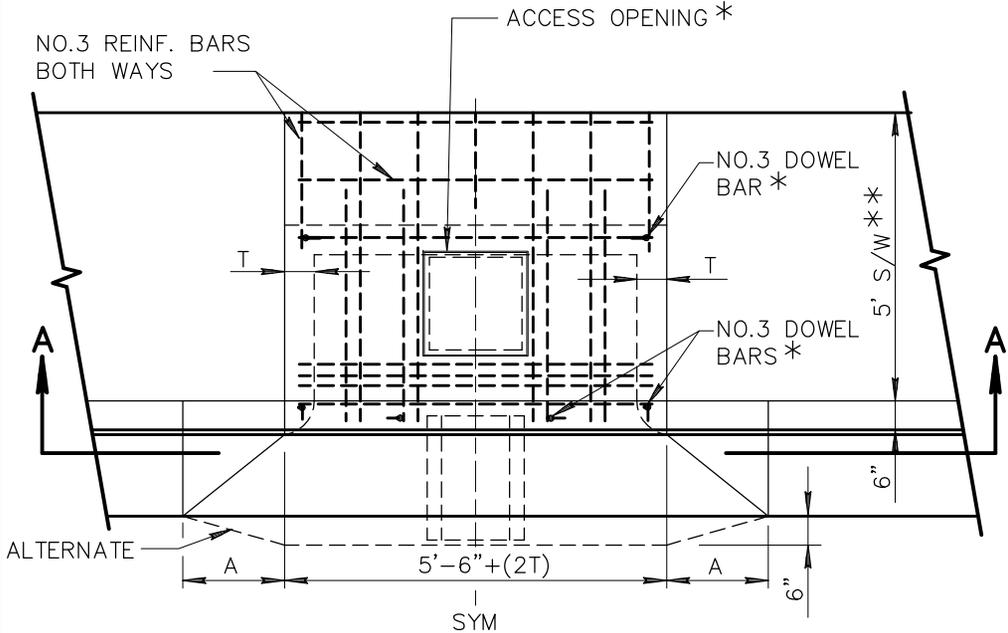

PLAN VIEW

NOTES:


1. THE ENTIRE CATCH BASIN COVER MAY BE POURED IN PLACE OR PRECAST.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. FLOOR OF BASIN SHALL BE TROWELLED TO A HARD SMOOTH SURFACE AND SHALL SLOPE FROM ALL DIRECTIONS TO OUTLET.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 D PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. CONCRETE SHALL BE CLASS A PER SECTION 725.

DIMENSIONS


CURB	A
4"	3'-3"
6"	1'-9"
7"	1'-0"

T=6" IF V=4' OR LESS
 T=8" IF V IS BETWEEN 4' AND 8'
 T=10" IF V IS 8' OR MORE (IF V EXCEEDS 10' SPECIAL DESIGN IS REQUIRED)
 V=3'-6" UNLESS OTHERWISE SPECIFIED.


* SEE DETAILS 536-1 AND 536-2 FOR DETAILS AND SECTIONS COMMON TO ALL CURB OPENING CATCH BASINS.
 ** 4' LOCATIONS WHERE 4' S/W IS REQUIRED.

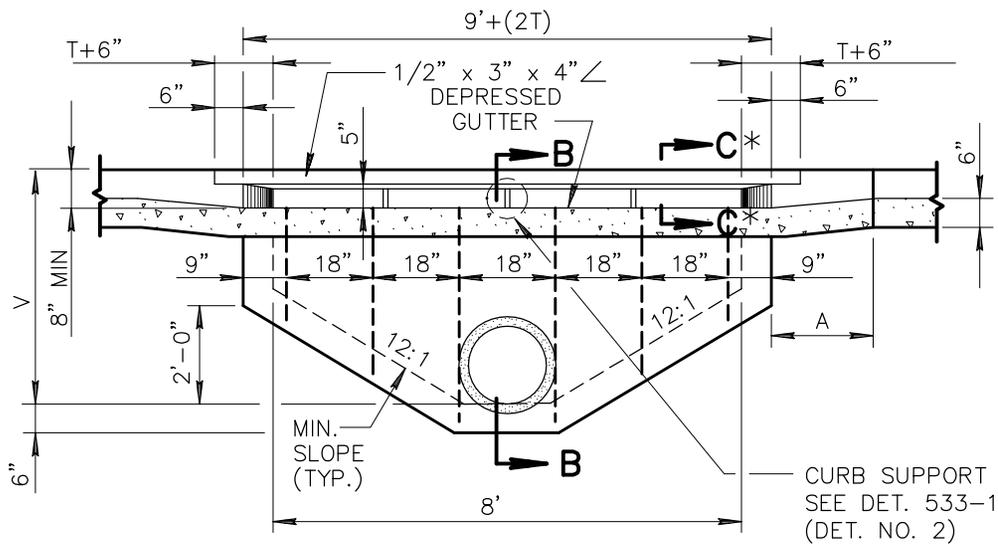

SECTION A-A

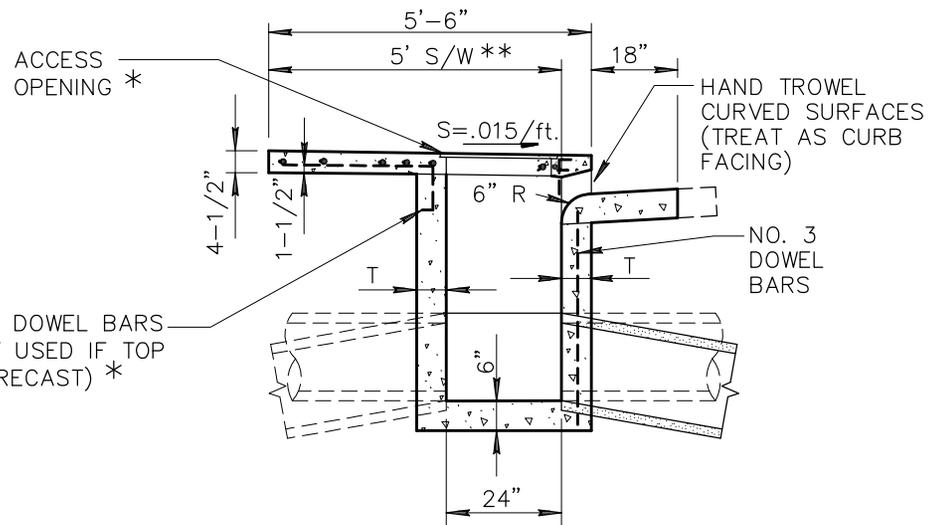

SECTION B-B

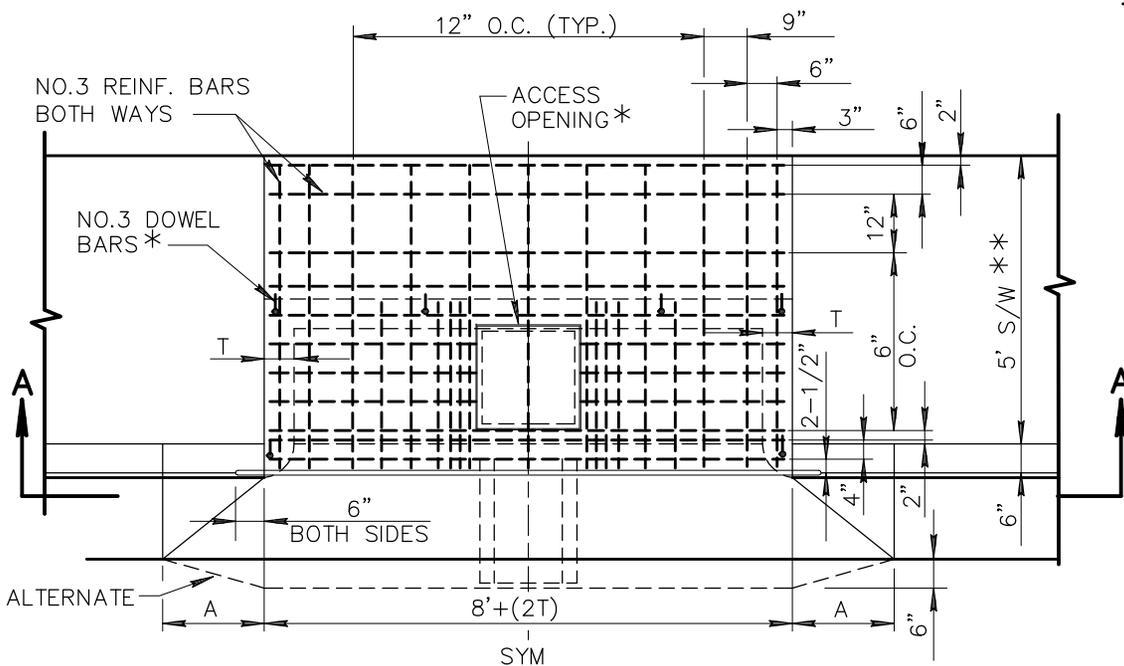

PLAN VIEW

NOTES:

1. THE ENTIRE CATCH BASIN COVER MAY BE POURED IN PLACE OR PRECAST.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. FLOOR OF BASIN SHALL BE TROWELLED TO A HARD SMOOTH SURFACE AND SHALL SLOPE FROM ALL DIRECTIONS TO OUTLET.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO.1 D PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. CONCRETE SHALL BE CLASS A PER SECTION 725.

CURB	A
4"	3'-3"
6"	1'-9"
7"	1'-0"

DIMENSIONS

T=6" IF V=4' OR LESS
 T=8" IF V IS BETWEEN 4' AND 8'
 T=10" IF V IS 8' OR MORE (IF V EXCEEDS 10' SPECIAL DESIGN IS REQUIRED)
 V=4' UNLESS OTHERWISE SPECIFIED.

* SEE DETAILS 536-1 AND 536-2 FOR DETAILS AND SECTIONS COMMON TO ALL CURB OPENING CATCH BASINS.
 ** 4' LOCATIONS WHERE 4' S/W IS REQUIRED.

DETAIL NO.

532



STANDARD DETAIL
 ENGLISH



**8'-0" CURB OPENING
 CATCH BASIN - TYPE 'C'**

REVISED

01-01-1998

DETAIL NO.


532

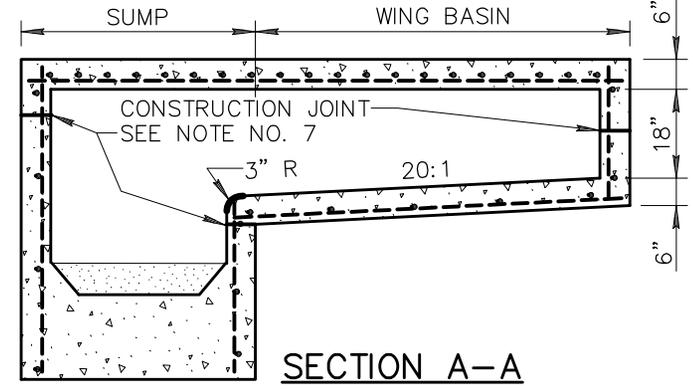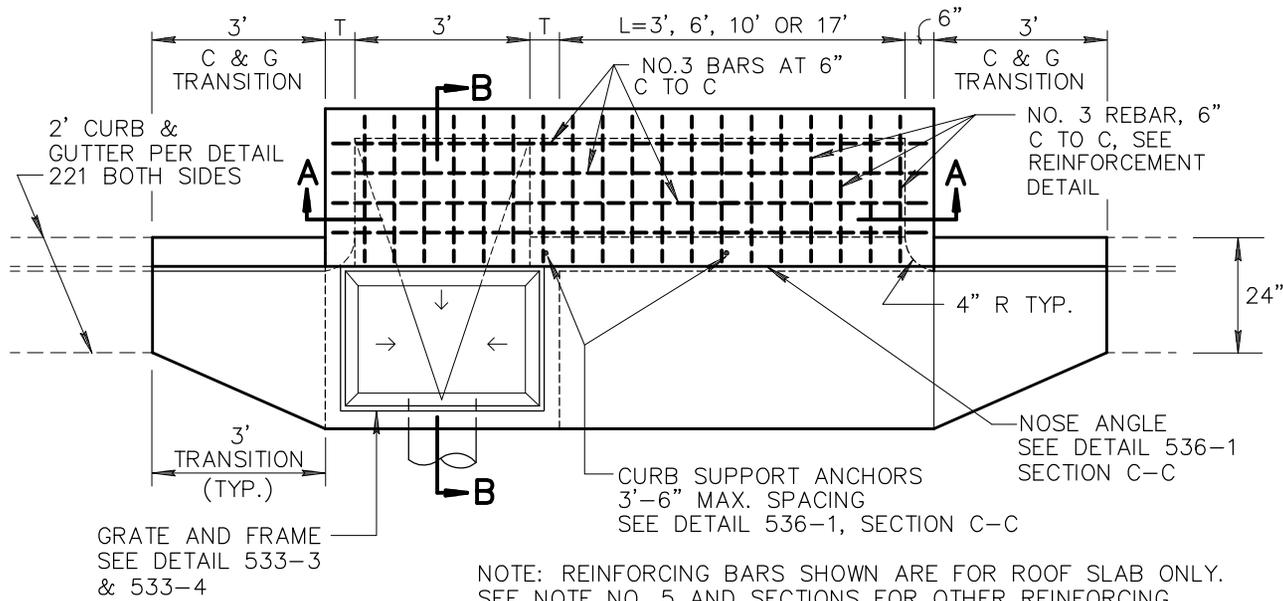

NOTES:

1. SINGLE C.B. (ILLUSTRATED), SUMP WITH WING BASIN UPSTREAM.
2. DOUBLE C.B. SUMP WITH SYMMETRICAL WING BASINS EACH SIDE.
3. PIPES CAN BE PLACED IN ANY WALL EXCEPT WALL ADJACENT TO A WING BASIN. PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS PLACED.
4. SUMP FLOOR SHALL HAVE A WOOD TROWEL FINISH AND A MIN. SLOPE OF 4:1 IN ALL DIRECTIONS TOWARD OUTLET PIPE.
5. ALL REFORCING BARS SHALL BE NO.4 18" C TO C BOTH WAYS AND 1-1/2" CLEAR TO INSIDE OF WALLS AND OUTSIDE WING BASIN FLOOR EXCEPT AS SHOWN. SEE SECT. 727.
6. ALL CONCRETE SHALL BE CLASS 'A', PER SECT. 725.
7. CONSTRUCTION JOINTS SHALL BE PLACED TO MEET FIELD CONDITIONS.
8. ALL EXPOSED STEEL SHALL BE GALVANIZED OR PAINTED WITH ONE SHOP COAT OF #1 PAINT AND TWO FIELD COATS OF #10 PAINT.


PLAN VIEW

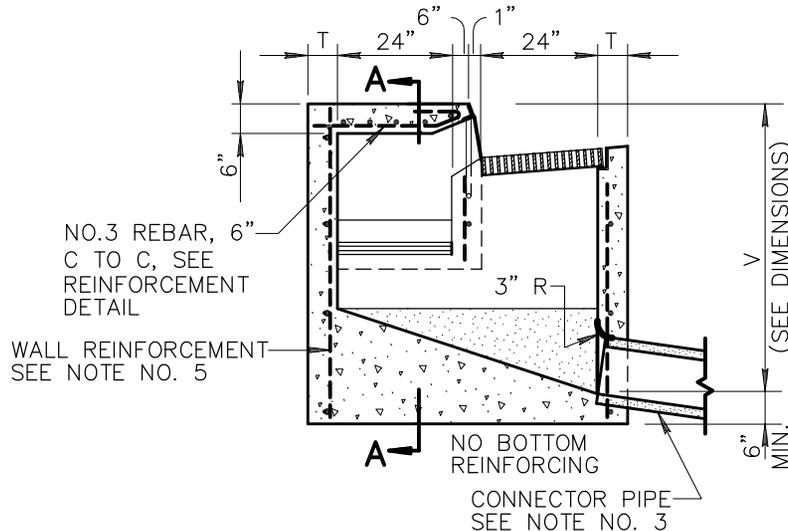



SECTION B-B

DIMENSIONS

- V = 3'-3" MIN. WHEN L = 3'
- V = 3'-5" MIN. WHEN L = 6'
- V = 3'-7" MIN. WHEN L = 10'
- V = 4'-0" MIN. WHEN L = 17'
- T = 6" WHEN V IS LESS THAN 8'
- T = 8" WHEN V IS EQUAL TO OR GREATER THAN 8'
- H = CURB HEIGHT PRIOR TO THE TRANSITION

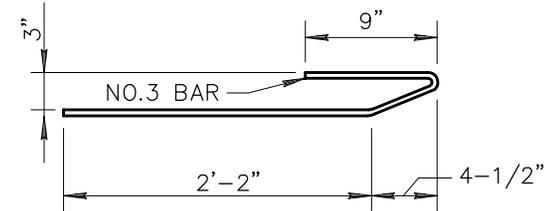


REINFORCEMENT DETAIL

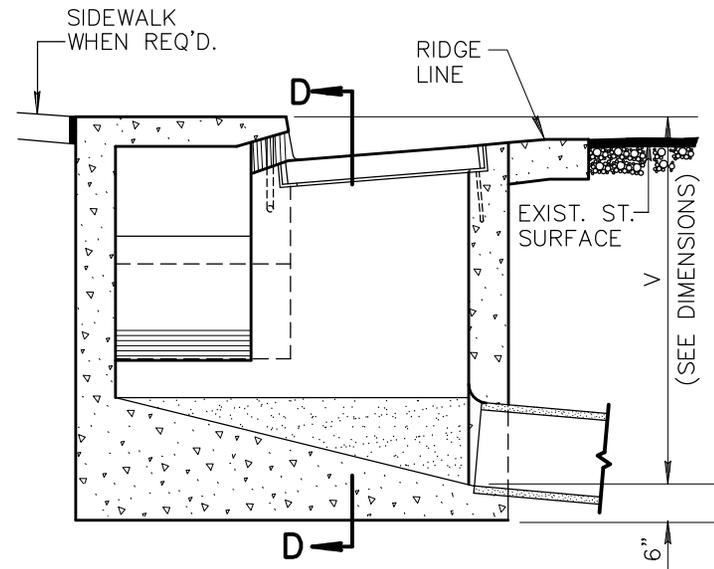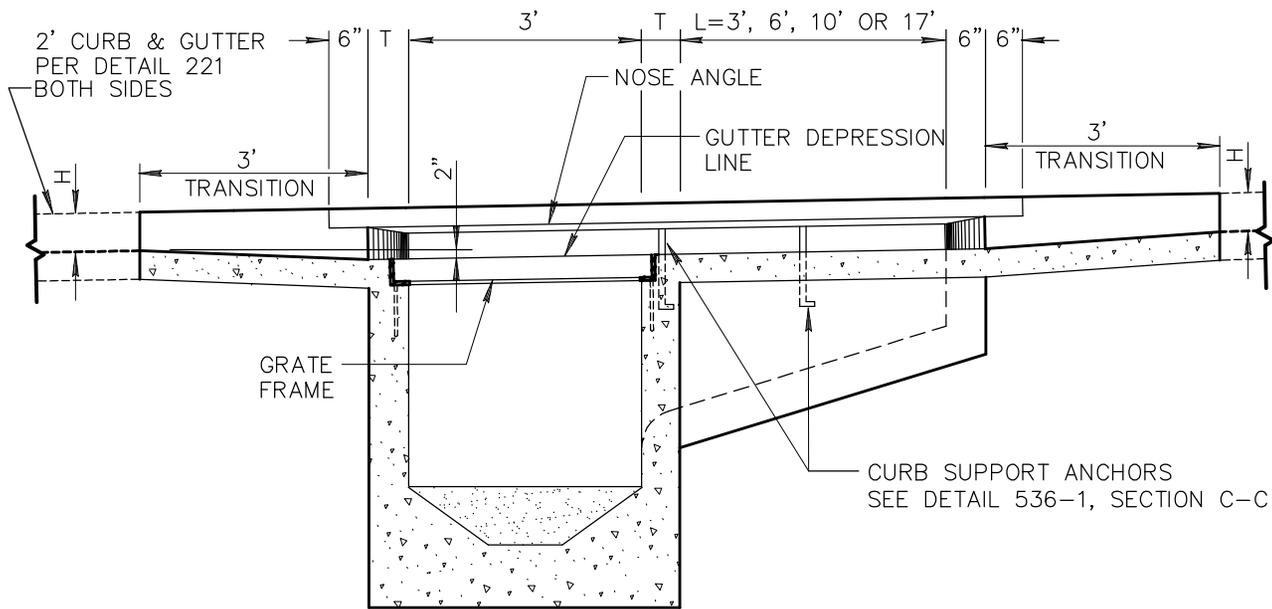

FOR S/W INSTALLATION
BEHIND CATCH BASIN
SEE DETAIL 230

SECTION D-D

SECTION E-E

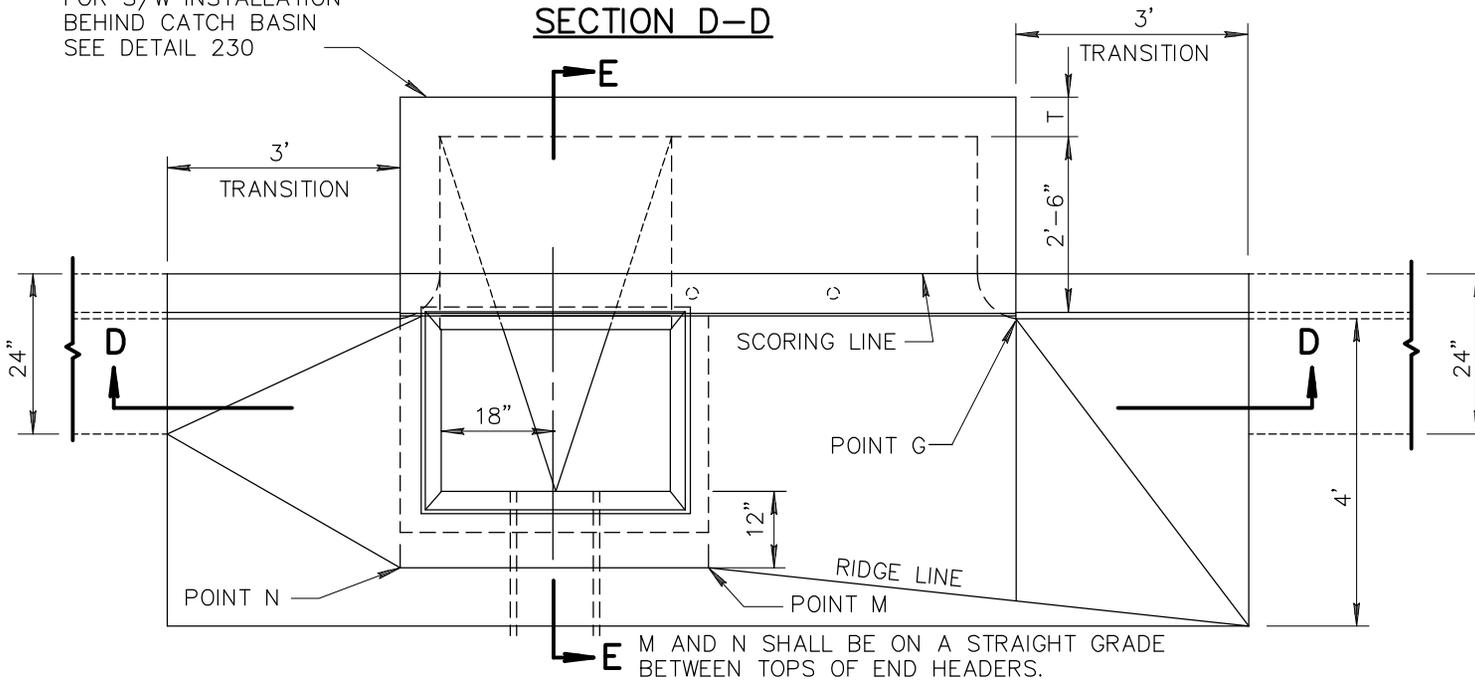

PLAN VIEW

APRON NOTES:

9. APRON IS CONSTRUCTED ONLY WHEN SPECIFIED ON PLANS.
10. CONCRETE IN APRON SHALL BE NOT LESS THAN 8" THICK.
11. CURB FACES AT CATCH BASIN OPENING AND POINT G SHALL BE THAT OF THE EXISTING CURB FACE PLUS 2' OR AS OTHERWISE SHOWN.
12. ELEVATION AT THE OUTER CORNERS OF THE LOCAL DEPRESSION SHOWN ON THE PLANS ARE FOR THE FINISHED SURFACE.
13. SEE DETAIL 533-1 FOR ADDITIONAL DIMENSIONS, REBAR PLACEMENT AND OTHER INFORMATION TO CONSTRUCT CATCH BASIN.

DETAIL NO.
533-2




STANDARD DETAIL
ENGLISH


APRON FOR TYPE 'D' CATCH BASIN

REVISED
01-01-1999

DETAIL NO.
533-2

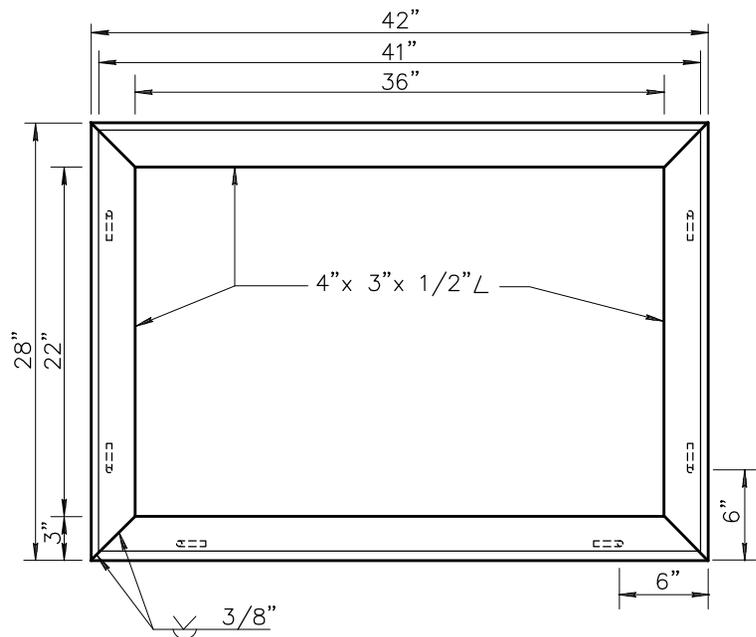


FRAME DETAIL

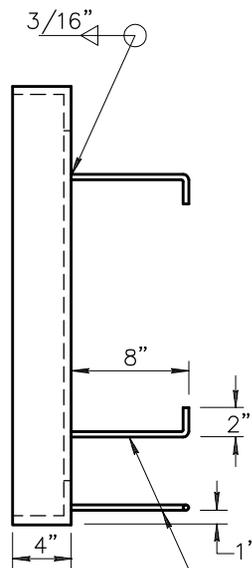


ANCHORS - TOTAL 6
SEE NOTE NO. 17

FRAME AND GRATE NOTES



14. FRAME AND GRATING SHALL BE TESTED FOR ACCURACY OF FIT AND SHALL BE MARKED IN SETS BEFORE DELIVERY.
15. ALL WELDING SHALL BE IN ACCORDANCE WITH STANDARD WELDING SPECIFICATIONS.
16. CROSS BARS AND END BARS MAY BE FILLET WELDED, RESISTANCE WELDED OR ELECTOR FORGED TO BEARING BARS.
17. ANCHORS SHALL BE 3/8" DIA. STEEL ROD, NO. 3 REBAR, 3/8" DIA. x 8" BOLTS OR 8" NELSON STUDS.
18. ALL PARTS SHALL BE OF STRUCTURAL GRADE STEEL.
19. ALL EXPOSED STEEL SHALL BE GALVANIZED OR PAINTED WITH ONE COAT #1 PAINT AND TWO FIELD COATS OF #10 PAINT.

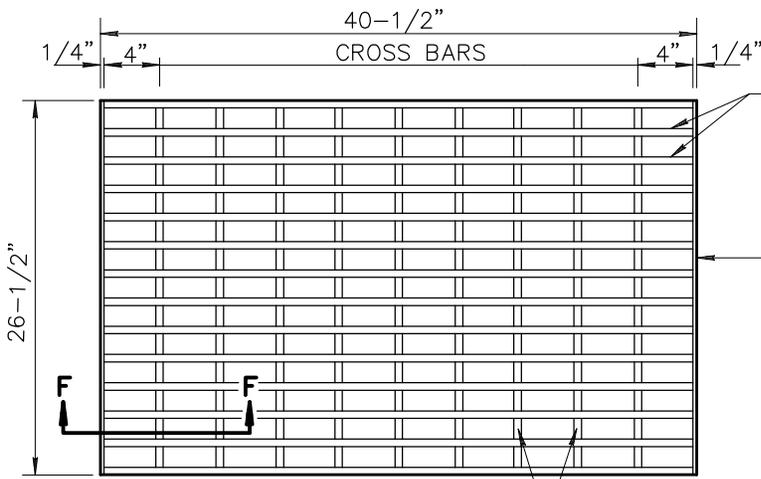

GRATE DETAIL

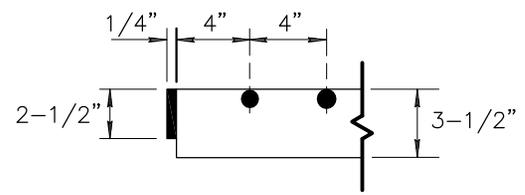

SECTION F-F

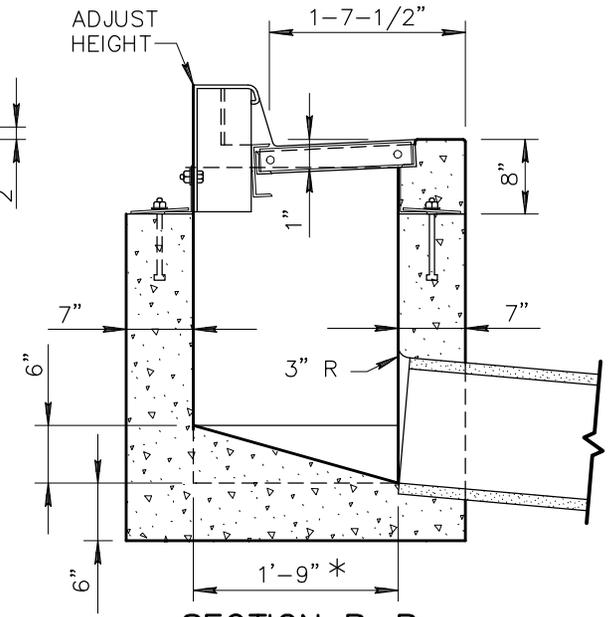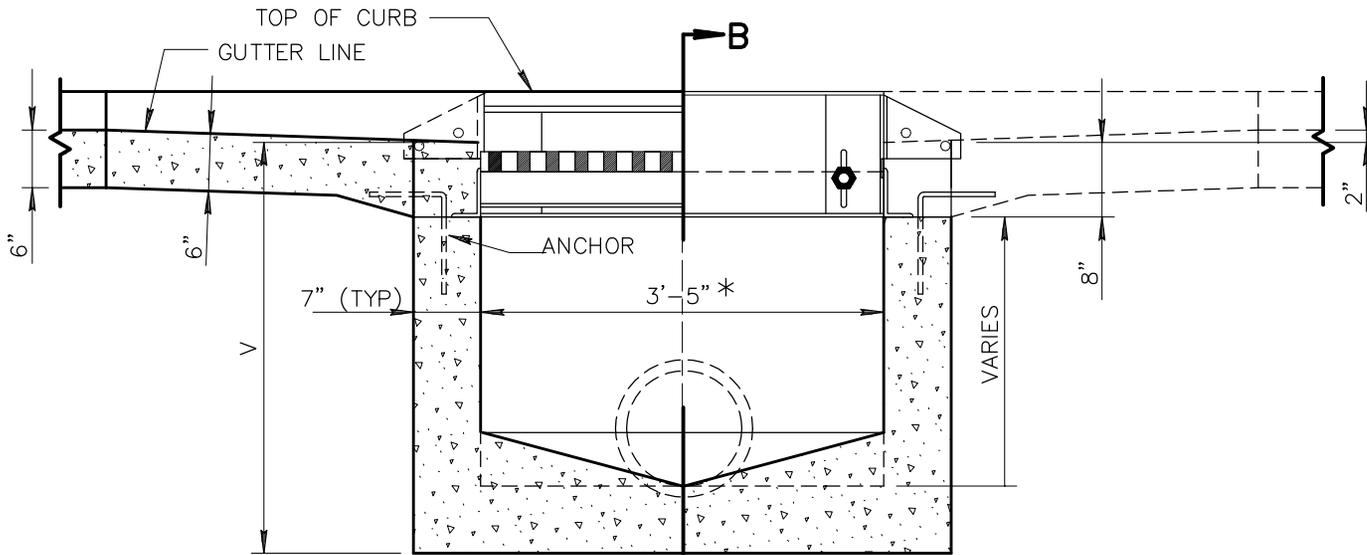


DIMENSION

V=3'-0" UNLESS OTHERWISE SPECIFIED.
 * DIMENSIONAL CHANGE WITH DETAIL
 534-3 AND DETAIL 534-4.

SECTION A-A

SECTION B-B

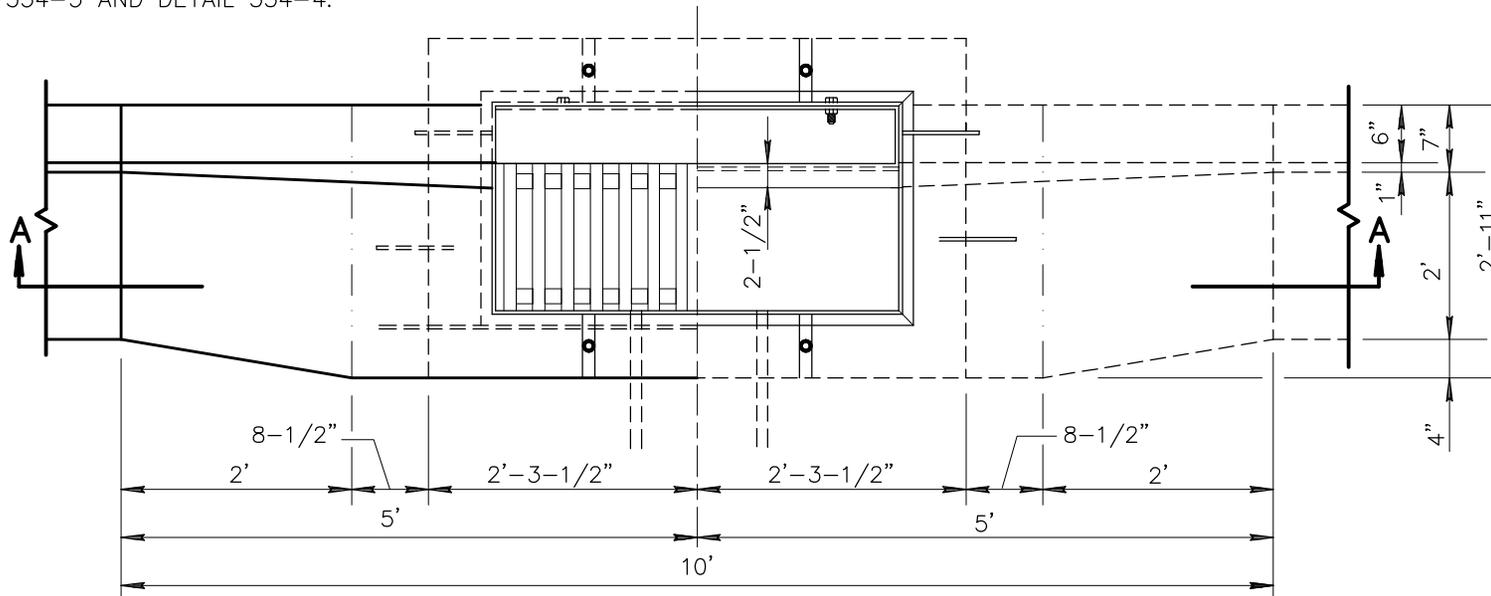


HALF PLAN GUTTER & GRATE


HALF PLAN FRAME & ANCHORS

NOTES:


1. ADJUSTABLE CURB, FRAME AND GRATING UNITS SHALL BE STRUCTURAL STEEL OR CAST IRON
2. PIPES MAY ENTER OR LEAVE ANY WALL. BOTTOM OF BOX TO BE SLOPED TO OUTLET PIPE FROM ALL DIRECTIONS AND TROWELLED TO A HARD SMOOTH SURFACE.
3. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
4. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
5. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
6. ALL CONCRETE, CLASS 'A' AS PER SECTION 725.

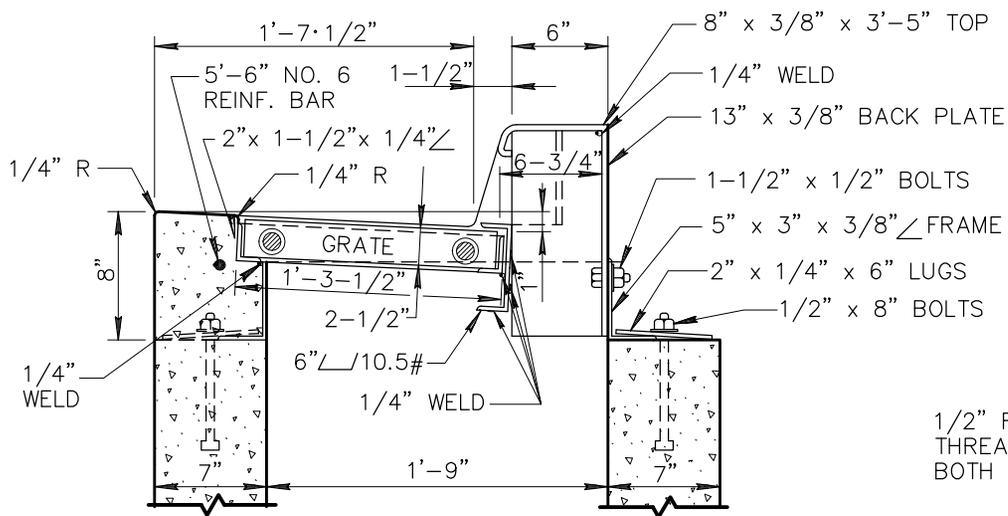



CROSS SECTION




DETAIL A

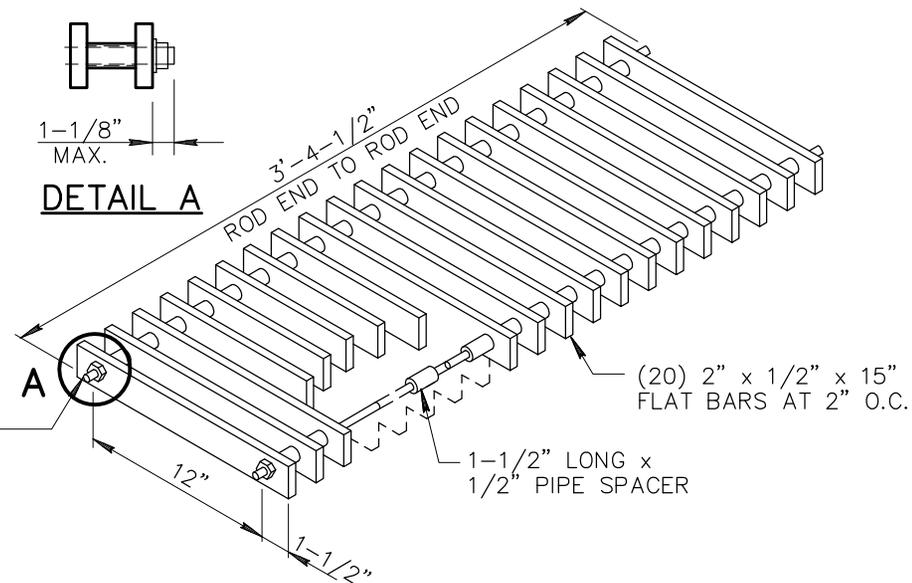


GRATE

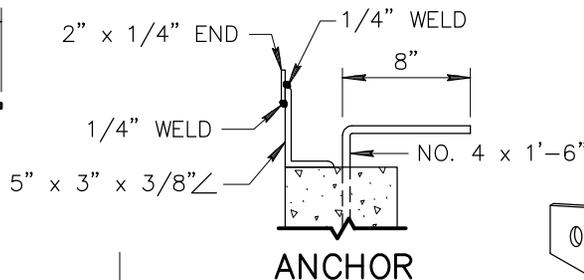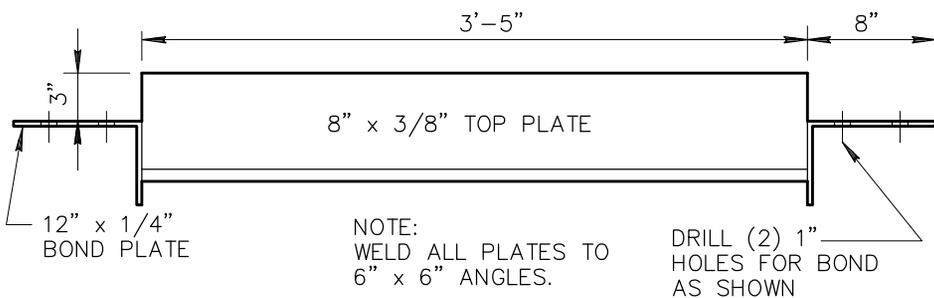

ANCHOR

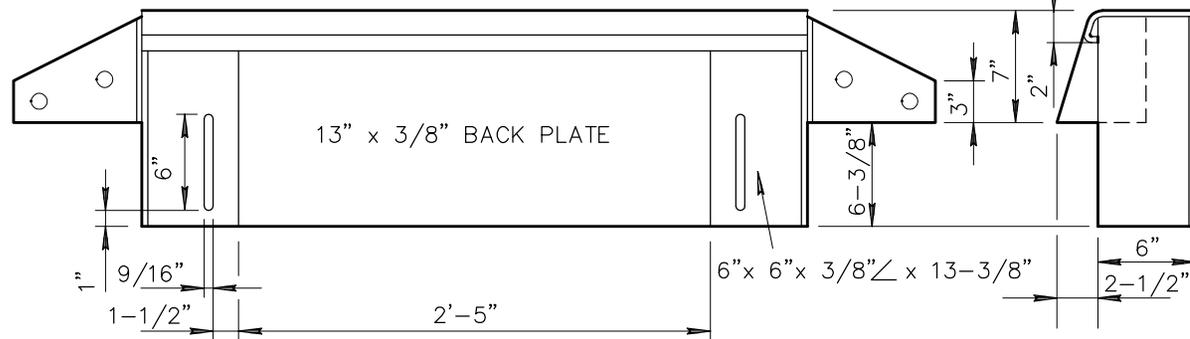

ADJUSTABLE CURB

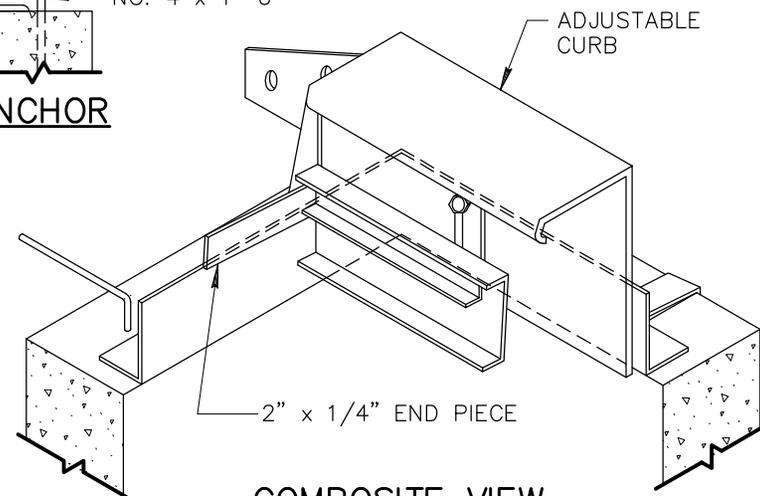

COMPOSITE VIEW

DETAIL NO.

534-2



STANDARD DETAIL
ENGLISH



CATCH BASIN TYPE 'E' (DETAILS)

REVISED

01-01-1998

DETAIL NO.


534-2

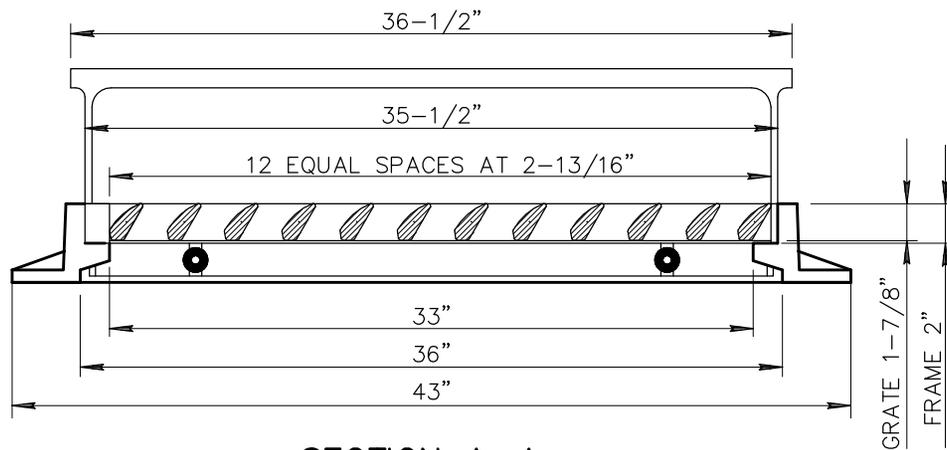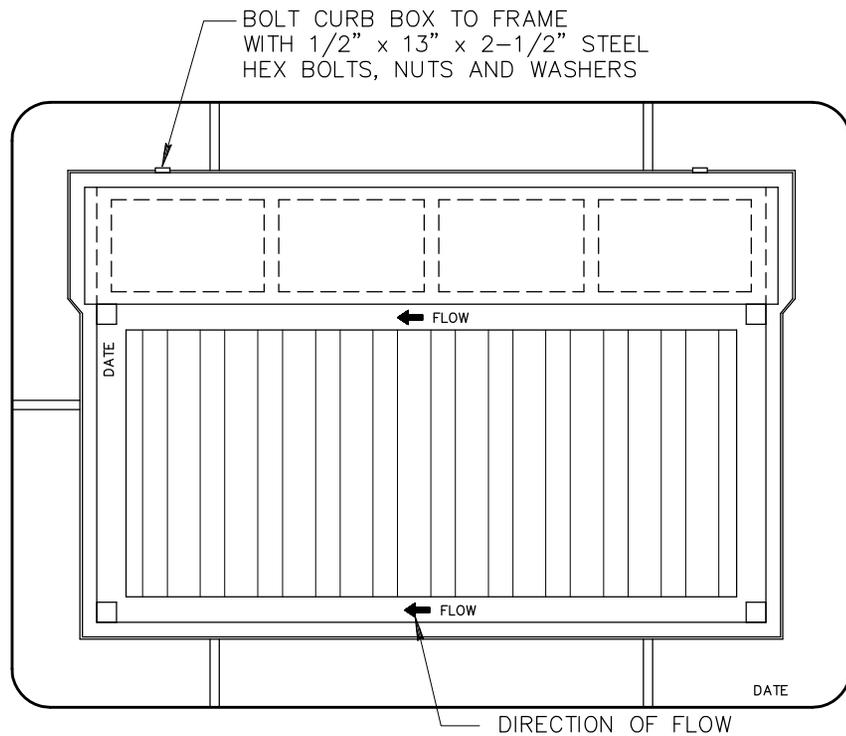

SECTION A-A


CAST IRON FRAME - GRATE - CURB BOX

CURB BOX ADJUST.
TO 9" HIGH

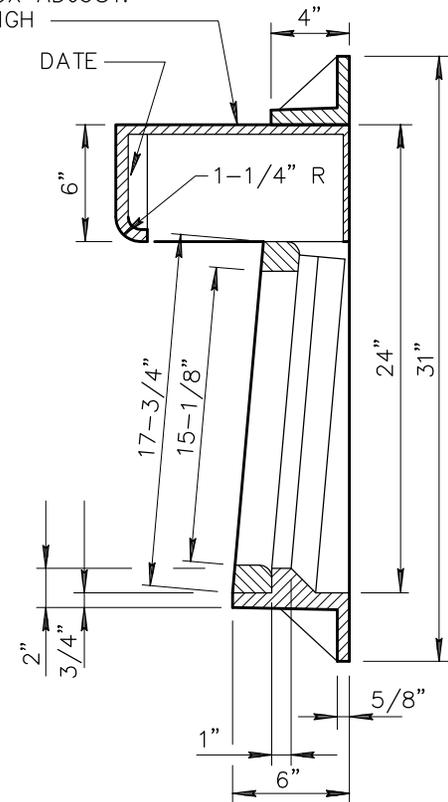

SECTION B-B



CROSS-SECTIONAL
AREA: 1.53 SQ. IN.



VANE DETAIL


NOTE:

DIMENSIONAL CHANGE REQUIRED FROM 3'-5"
WIDTH TO 3'-0" AND 1'-9" DEPTH TO 2'-0"
MATERIAL CAST GRAY IRON ASTM A-48-83 CLASS 35B.
FRAME WEIGHT 209 LBS; GRATE 140 LBS; CURB BOX 92 LBS.

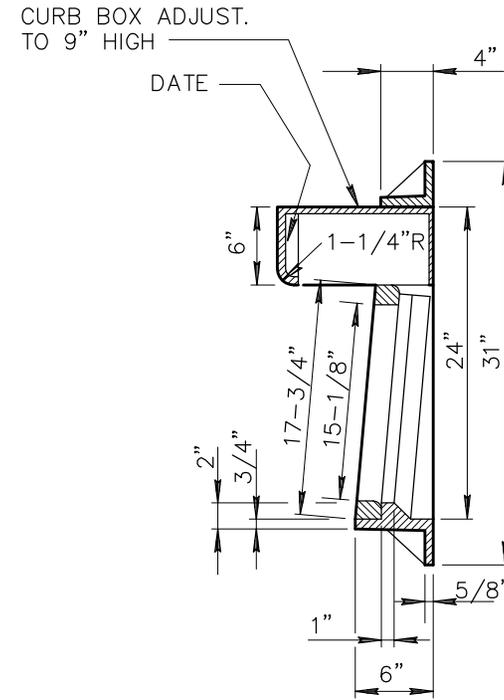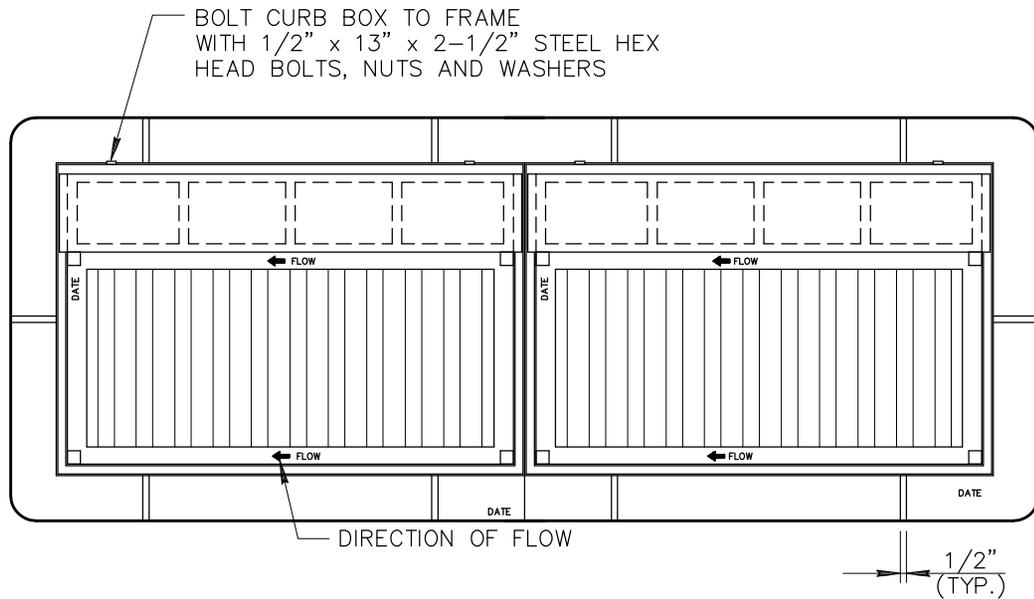


SECTION B-B

CROSS-SECTIONAL AREA: 1.53 SQ. IN.



VANE DETAIL

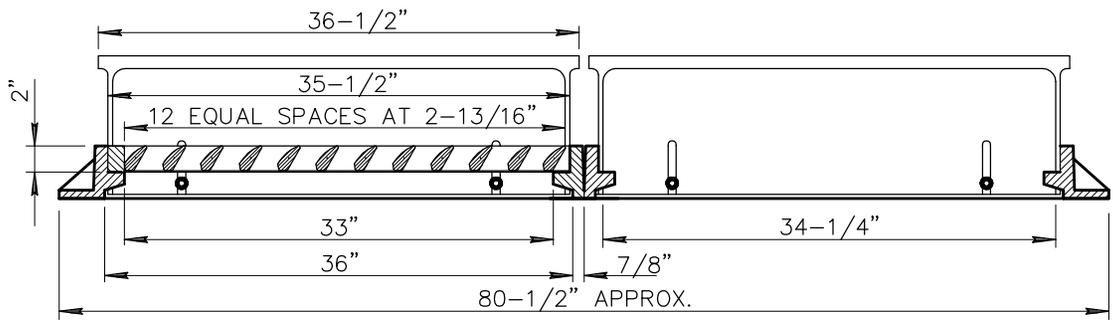

SECTION A-A

DOUBLE UNIT CAST IRON FRAME - GRATE - CURB BOX

NOTE:

DIMENSIONAL CHANGE REQUIRED FROM 3'-5" WIDTH TO 6'-2", AND 1'-9" DEPTH TO 2'-0" REQUIRES ONE CENTER STEEL I-BEAM 4" x 7.7 LBS. MATERIAL CAST GRAY IRON ASTM A-48-83 CLASS 35B. FRAME WEIGHT 197 LBS.; GRATE 140 LBS.; CURB BOX 92 LBS.

DETAIL NO.
534-4












STANDARD DETAIL
ENGLISH

CATCH BASIN TYPE 'E' (DETAILS)

REVISED
01-01-1998

DETAIL NO.
534-4

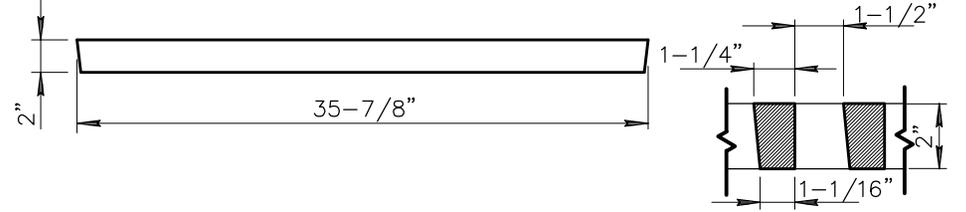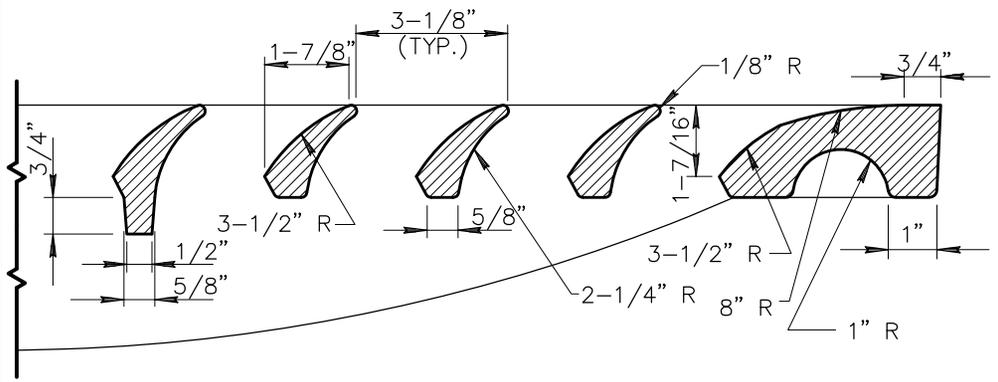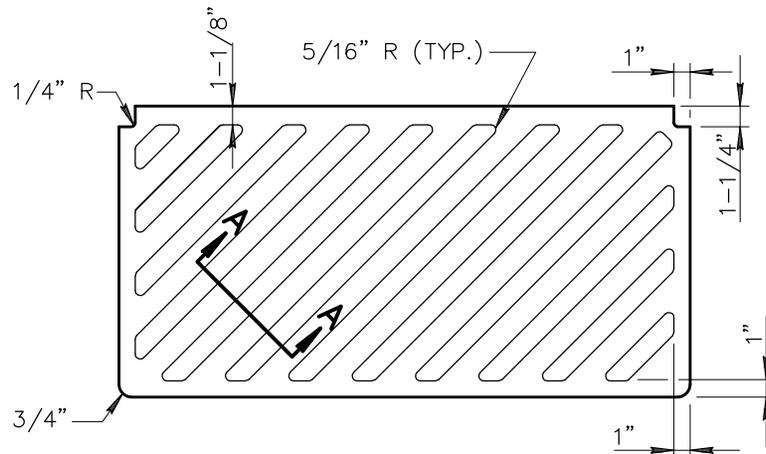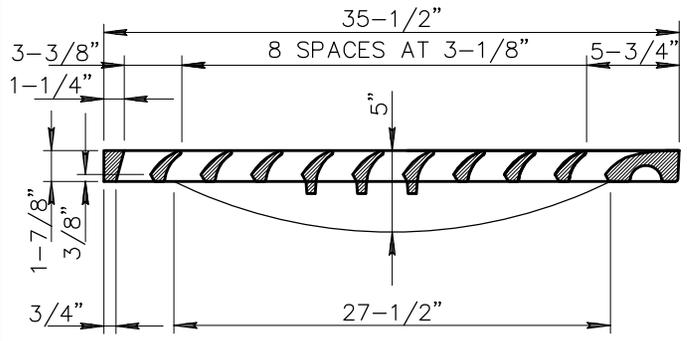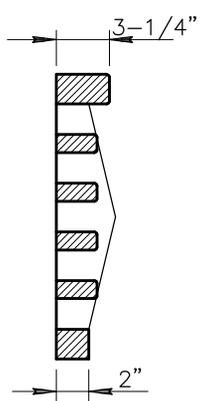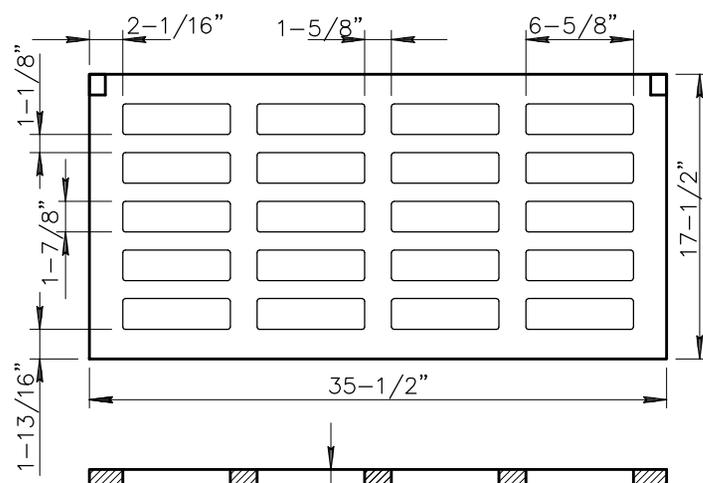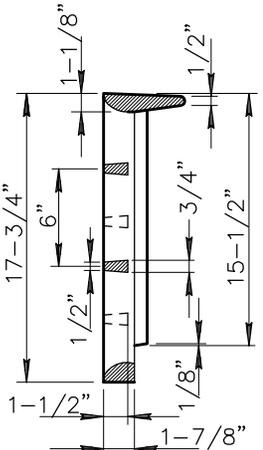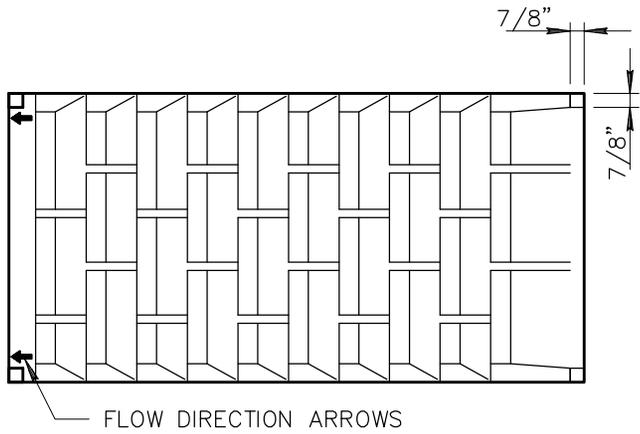

DETAIL NO.
534-5





STANDARD DETAIL
ENGLISH


**ALTERNATE GRATE STYLES
SUMP LOCATION**

REVISED
01-01-1998

DETAIL NO.
534-5

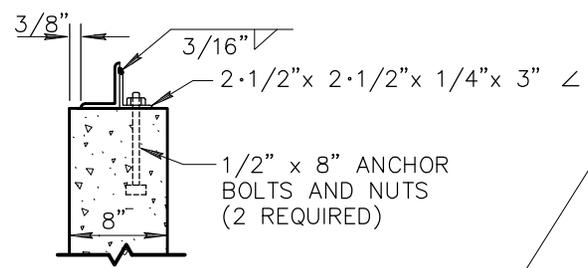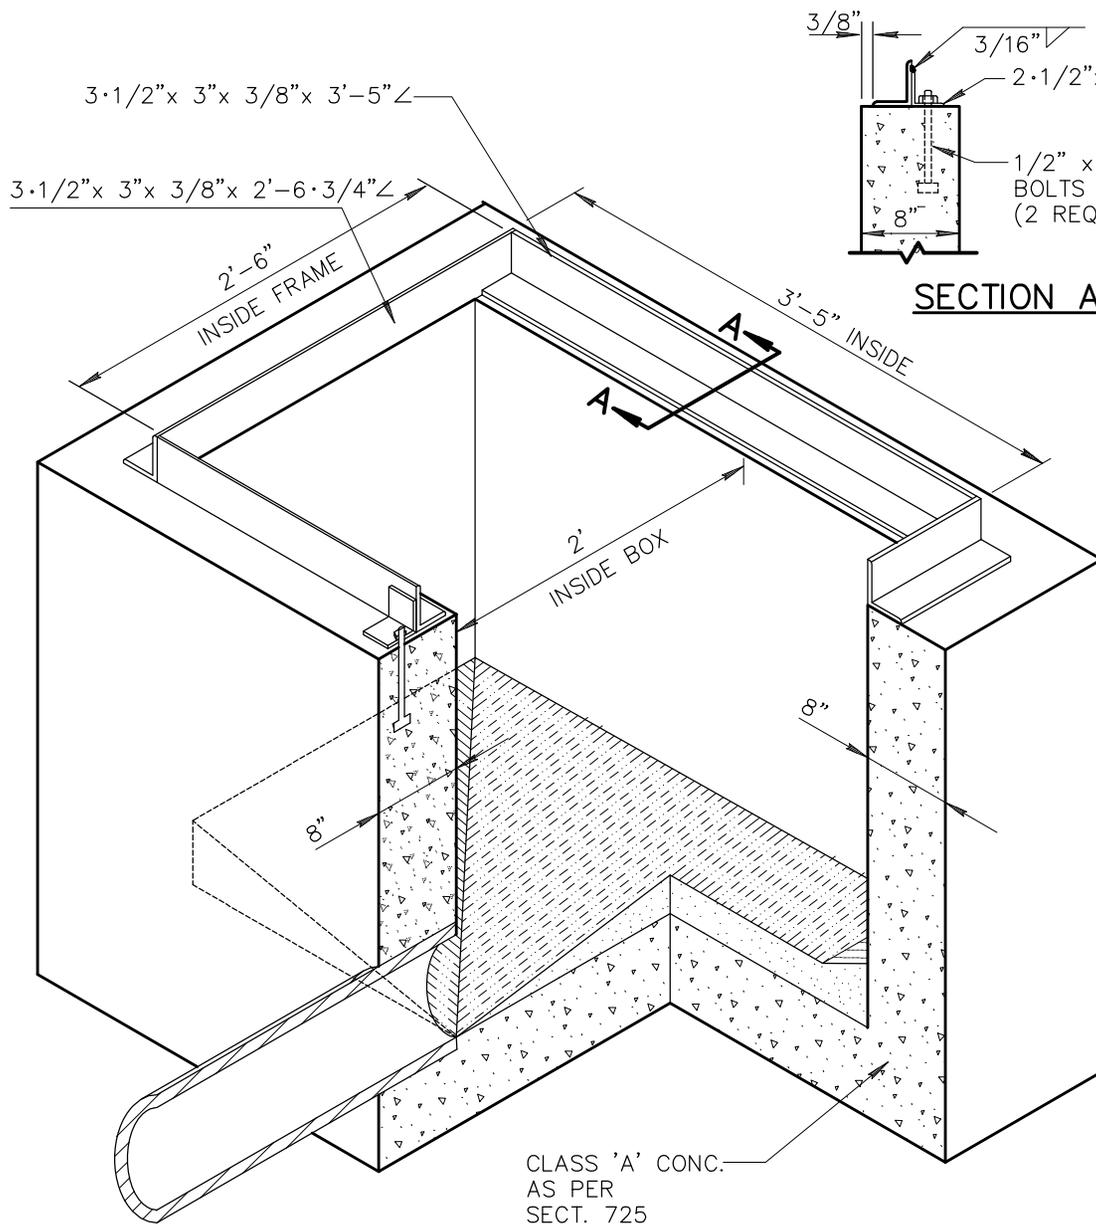

SECTION A-A

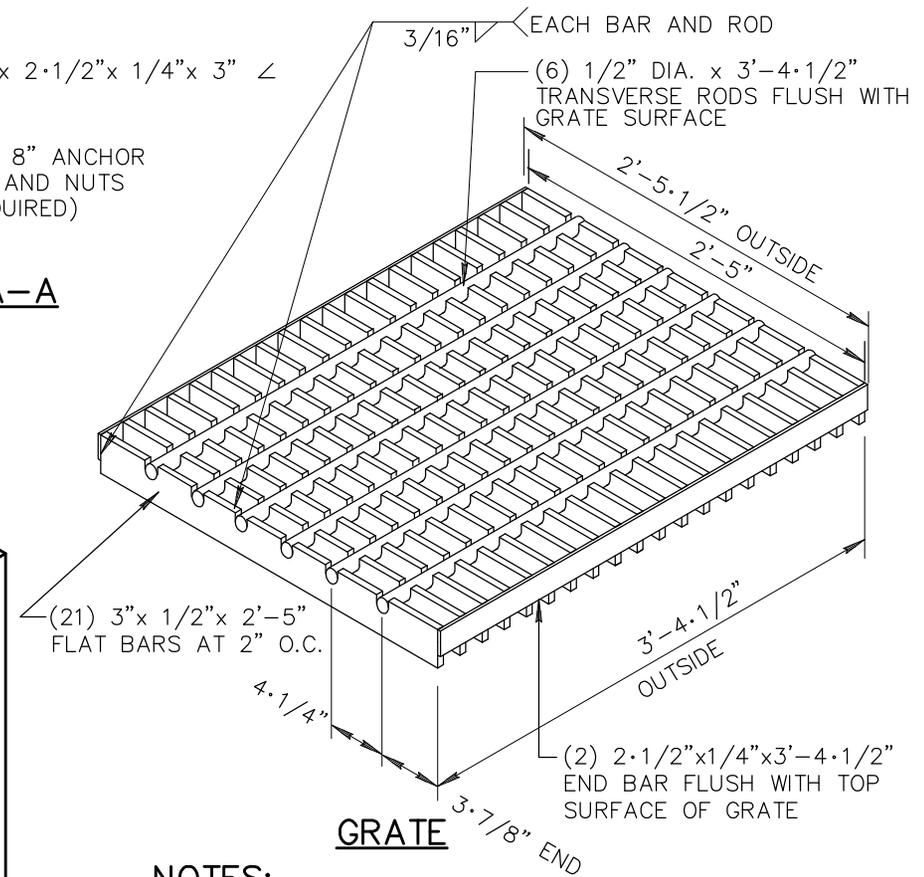


GRATE

NOTE:
SEE DETAIL 534-1 FOR THICKNESS AND
SLOPE DIMENSIONS OF BOTTOM.

NOTES:

1. PIPES MAY ENTER OR LEAVE ANY WALL. BOTTOM OF BOX TO BE SLOPED TO OUTLET PIPE FROM ALL DIRECTIONS AND TROWELLED TO A HARD SMOOTH SURFACE.
2. CONNECTION PIPES MAY BE PLACED IN ANY POSITION AROUND THE WALLS PROVIDED THE POSITION IS CONSISTENT WITH THE PLAN.
3. OUTLET PIPE SHALL BE TRIMMED TO FINAL SHAPE AND LENGTH BEFORE CONCRETE IS POURED.
4. ALL STRUCTURAL STEEL TO BE PAINTED ONE SHOP COAT OF NO. 1 PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECT. 790.
5. ALL WELDS ON FRAME AND SIDE BARS ON GRATE SHALL BE FULL LENGTH OF JOINT.
6. TOTAL COMBINED CLEARANCE BETWEEN FRAME AND GRATE IS 1/2".

NO. 4 REINFORCEMENT BARS, 12" SPACING, WELDED TO NOSE ANGLE WITH 3/8" WELDS BOTH SIDES

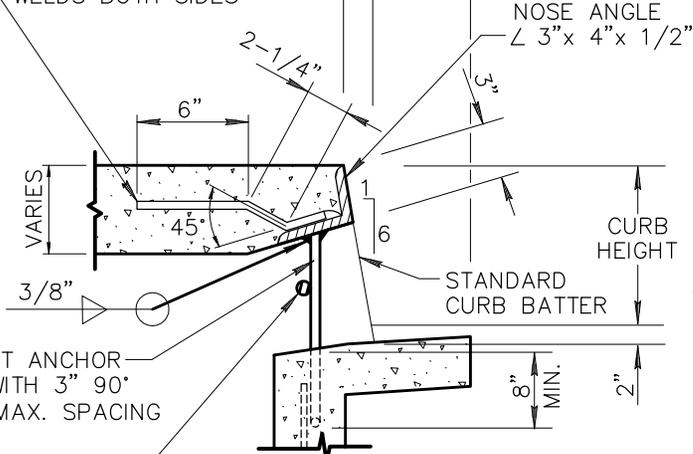


SECTION C-C


FOR DETAILS 531, 532 AND 533

CURB SUPPORT ANCHOR
1" DIA. BAR WITH 3" 90°
BEND, 3'-6" MAX. SPACING

PROTECTION BAR
SEE THIS DETAIL

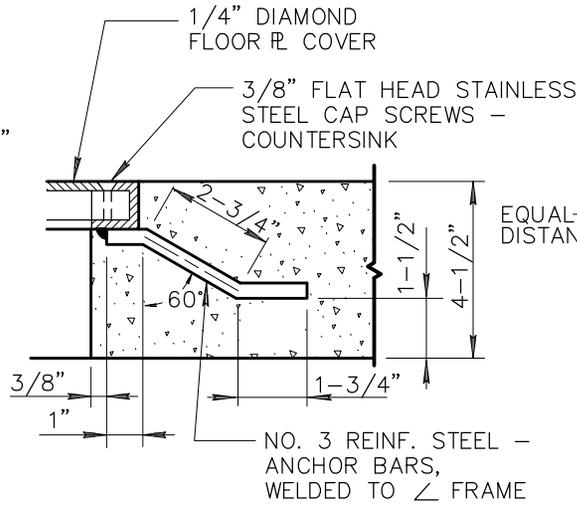


SECTION D-D

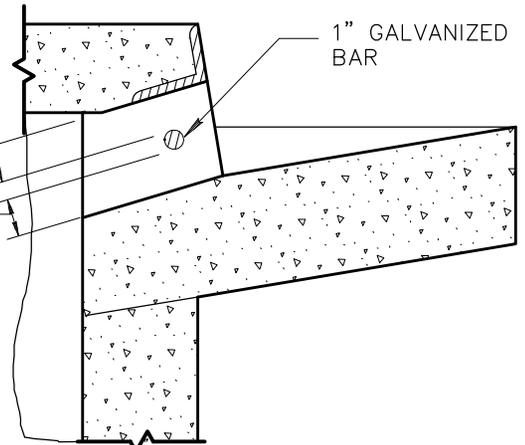

PROTECTION BAR

NOTES:


- 1) HORIZONTAL PLAIN ROUND GALVANIZED STEEL PROTECTION BAR SHALL BE USED WHEN CURB FACE IS 9" OR MORE.
- 2) THE BAR SHALL BE EMBEDDED 5" AT EACH END.

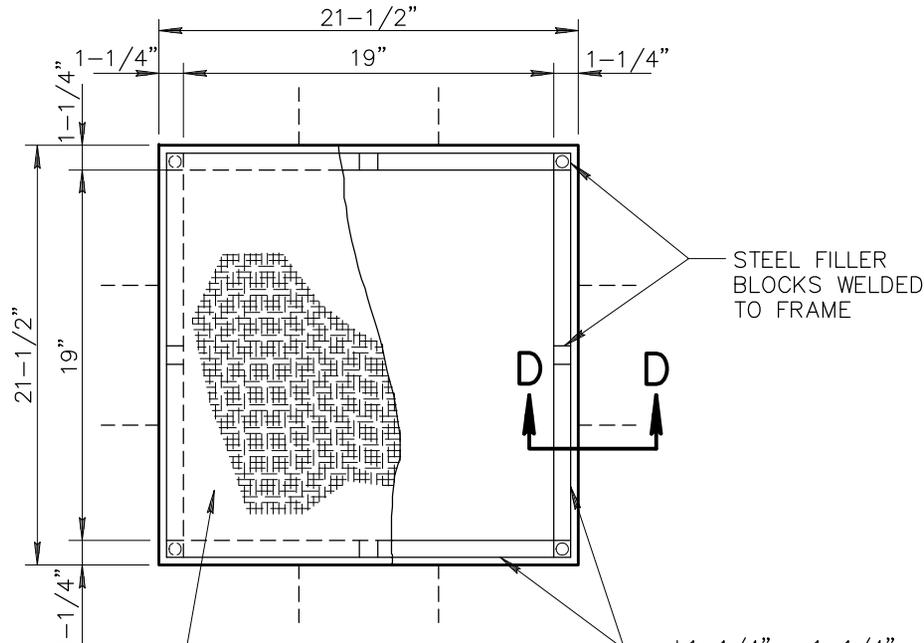

PLAN VIEW

1/4" DIAMOND FLOOR REINFORCEMENT COVER

L1-1/4" x 1-1/4" x 1/4" IRON FRAME

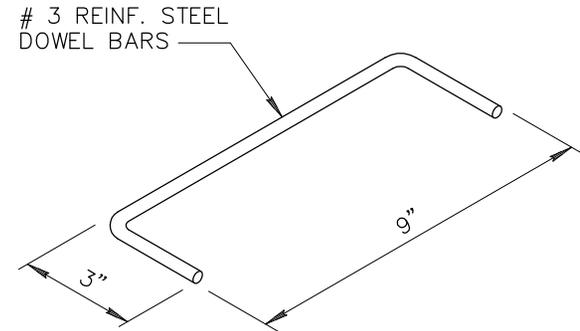

DOWEL BAR

DETAIL NO.

536-1



STANDARD DETAIL
ENGLISH


**COMMON DETAILS AND SECTIONS
FOR CURB OPENING CATCH BASINS**

REVISED

01-01-1999


DETAIL NO.

536-1

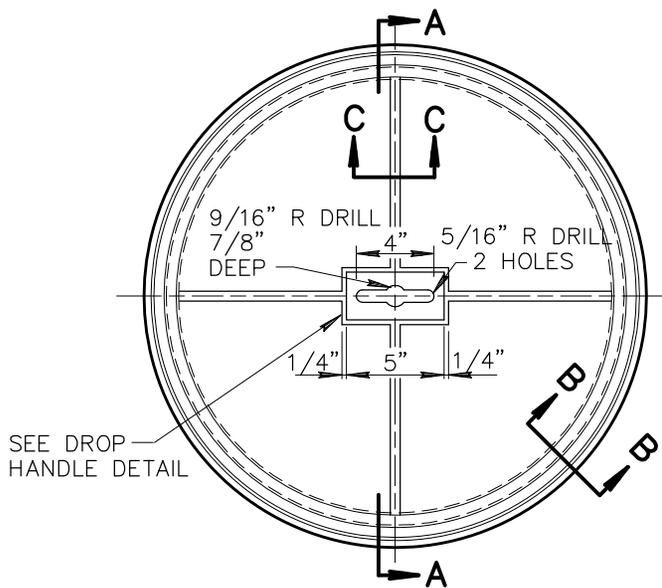


PLAN VIEW

SEE DROP HANDLE DETAIL

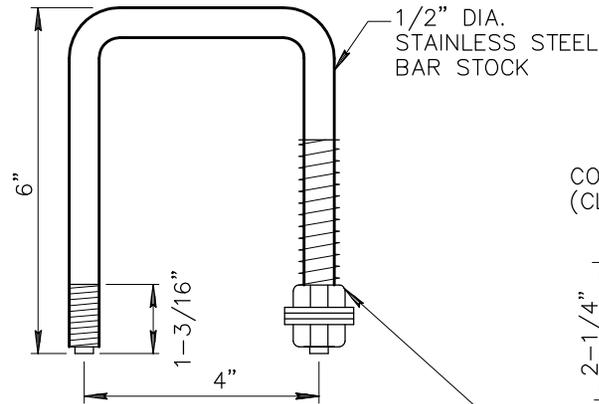


- FURNISH FOR EACH SIDE OF HANDLE
- 1 EACH 304-S.STL. SPRING
2-1/2" x 17/32" I.C. x 3/32"
 - 2 EACH 1/2" HEX NUT
 - 3 EACH 1/2" FLAT WASHER
 - 1 EACH 1/2" LOCK WASHER


DROP HANDLE

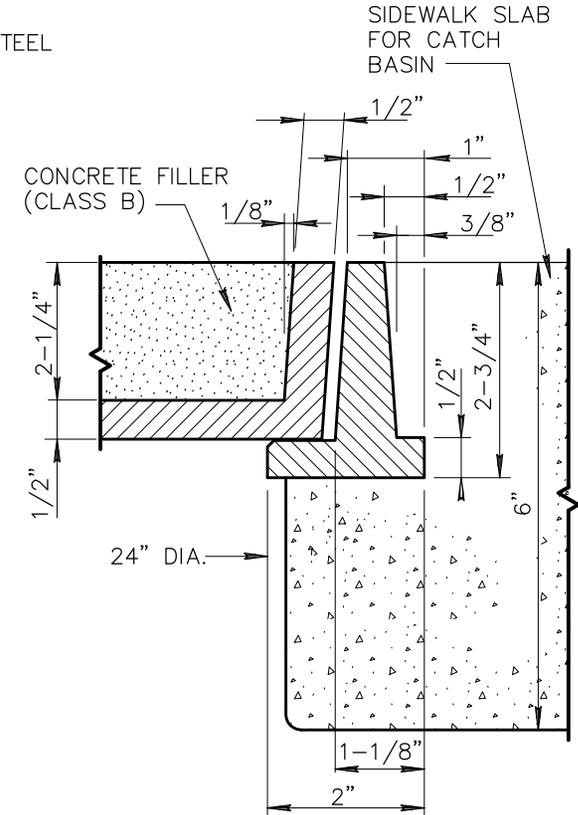

SECTION B-B

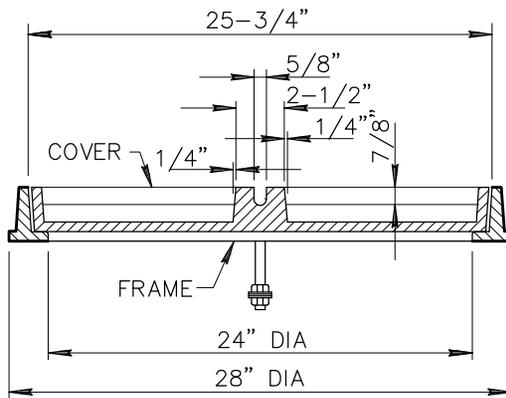

SECTION A-A



SECTION C-C

NOTES:

1. FRAME SHALL BE NON-LOCKING.
2. FRAME AND COVER SHALL BE CAST IRON OR ASTM A-36 STRL. HORIZONTAL SURFACE OF COVER IN CONTACT WITH FRAME SHALL BE MACHINED. ASA B-46 ROUGHNESS SHALL NOT EXCEED 1/32".
3. COVER SHALL BE FILLED WITH CONCRETE AND BROOM FINISHED.
4. SMALL VARIATIONS IN DIMENSIONS OF FEATURES OF A MINOR NATURE THAT ARE PART OF THE FOUNDRY'S CASTING ARE PERMISSIBLE.

DETAIL NO.

536-2



STANDARD DETAIL
ENGLISH

**ALTERNATE COVER FOR
CURB OPENING CATCH BASINS**


REVISED

01-01-1998

DETAIL NO.


536-2

29" x 29" I.D.
GRATE FRAME

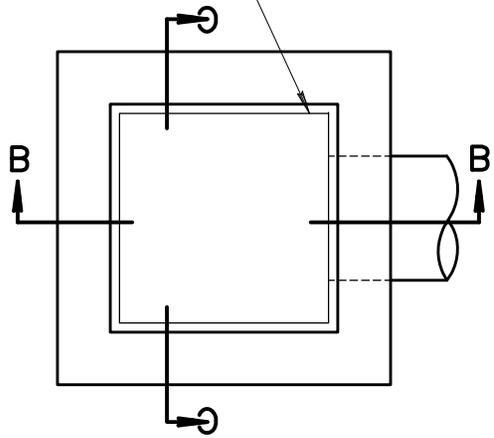


PLAN

SINGLE GRATE

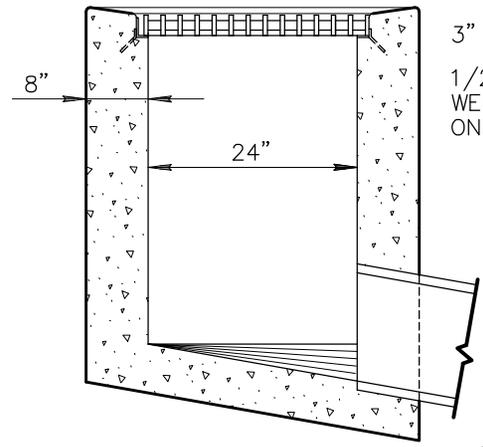


SECTION B-B

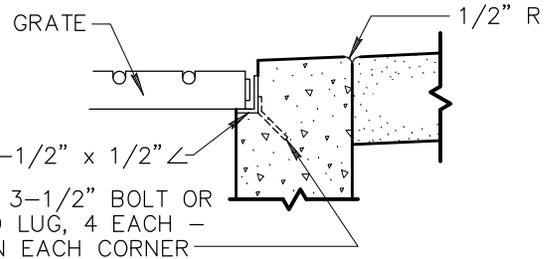

3" x 2-1/2" x 1/2" \angle
1/2" x 3-1/2" BOLT OR
WELDED LUG, 4 EACH -
ONE ON EACH CORNER


DETAIL OF ANGLE FRAME
GRATE SUPPORT

ALL CONCRETE SHALL BE
CLASS 'A' PER SECT. 725.
EXPOSED EDGES SHALL BE
FINISHED WITH A 1/2"
RADIUS.




1/2" DIA x 1" EYE BOLT
2-3/8" x 3-1/8" x 1/4"
BEVELED SIDES FOR WELDS

WELD INTO
SECOND
SPACE

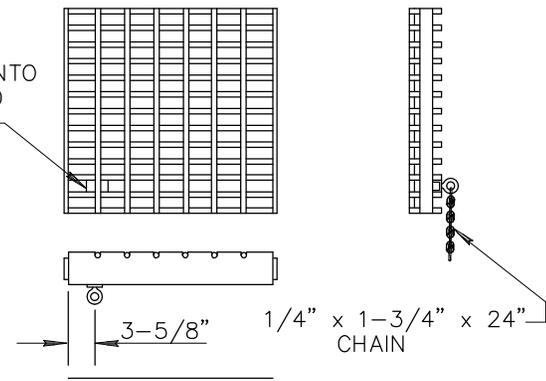


BAR GRATE
SEE DETAIL 539

1/4" x 1-3/4" x 24" CHAIN TO 1" x 6"
EYE BOLT IN WALL. BEND BOLT 1"
ON END.

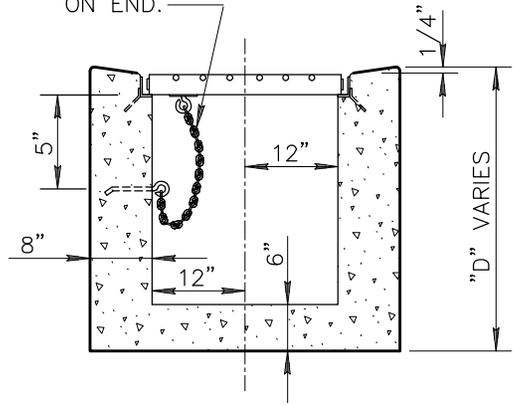


SECTION C-C

29" x 53" I.D.
GRATE FRAME

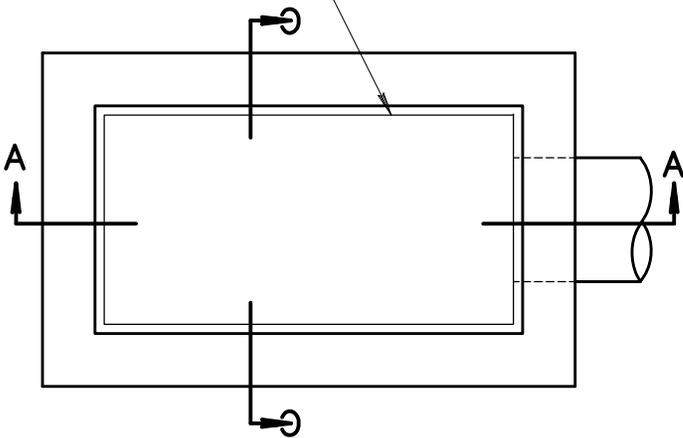

PLAN

DOUBLE GRATE

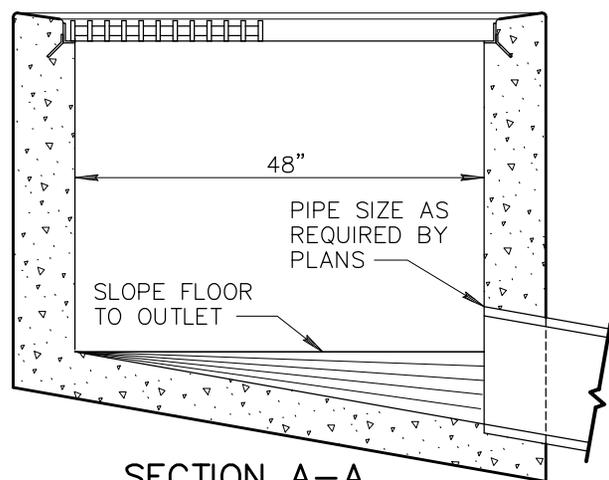

SECTION A-A

DETAIL NO.

537



STANDARD DETAIL
ENGLISH


CATCH BASIN - TYPE 'G'

REVISED

01-03-2002


DETAIL NO.

537

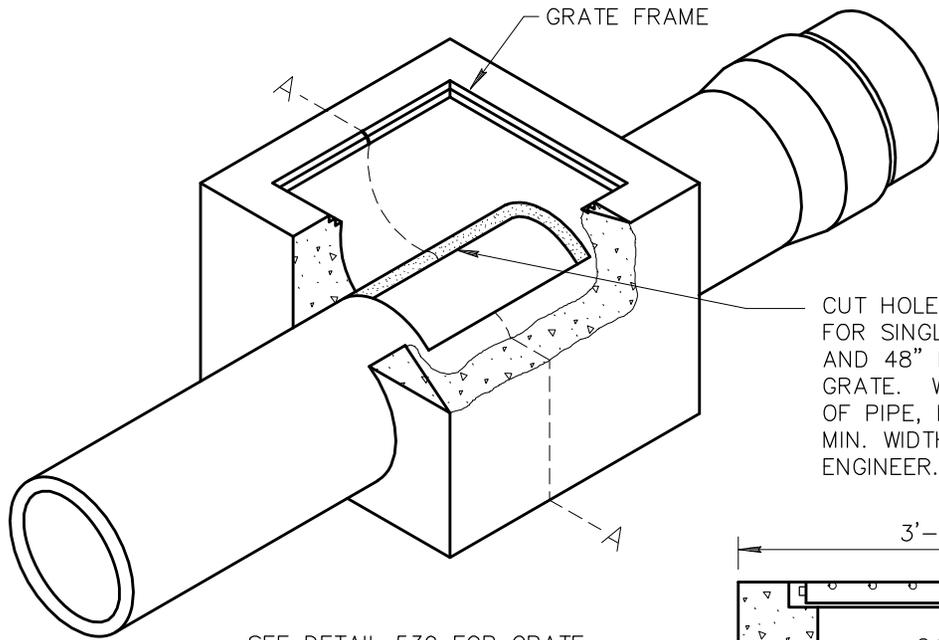


WHEN DOUBLE GRATE IS USED INCREASE THE LENGTH OF THE STRUCTURE ACCORDINGLY.


CUT HOLE IN PIPE 24" LONG FOR SINGLE GRATE STRUCTURES AND 48" LONG FOR DOUBLE GRATE. WIDTH DEPENDS ON DIA. OF PIPE, NOT TO EXCEED 22" MIN. WIDTH TO BE SET BY PROJECT ENGINEER.

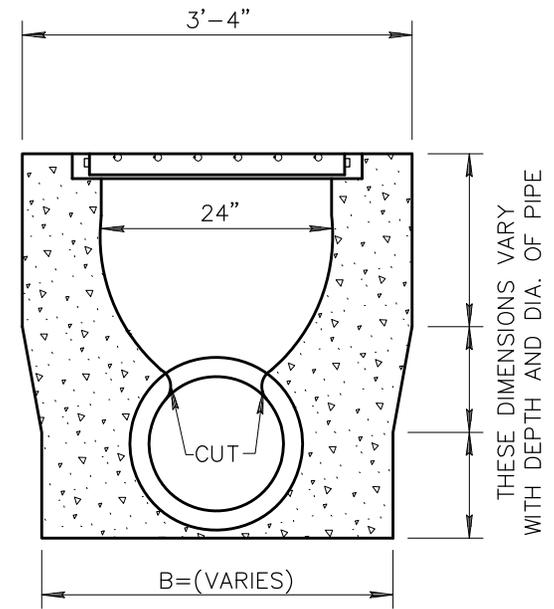


SECTION A-A

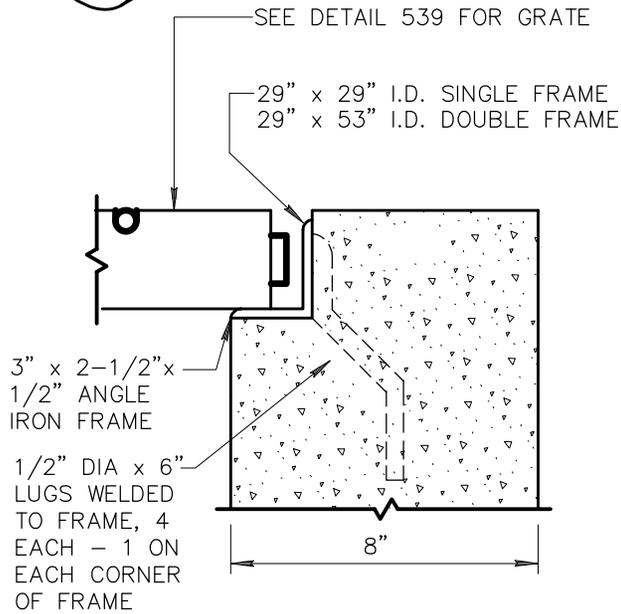

DETAIL OF ANGLE FRAME GRATE SUPPORT

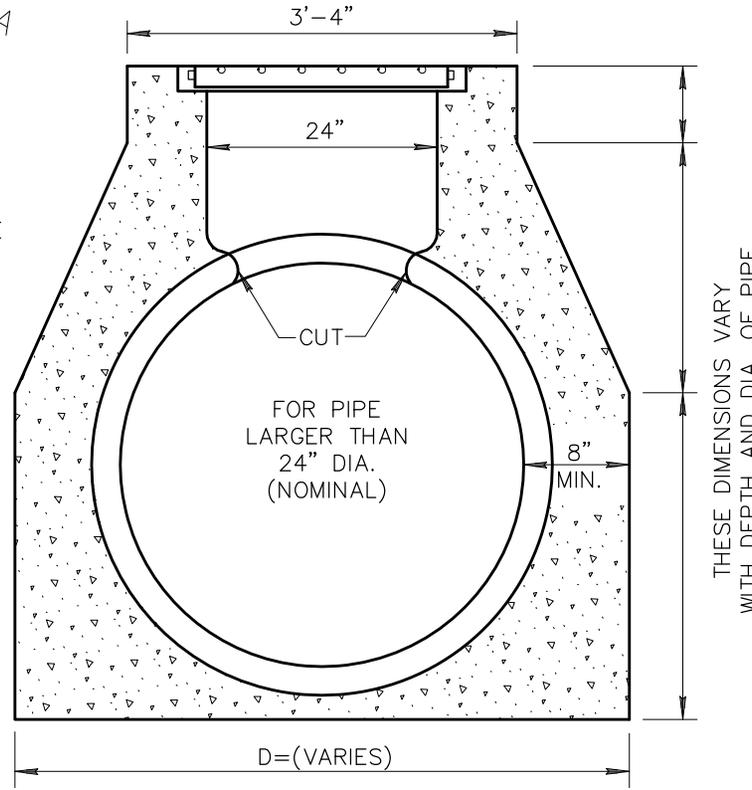

SECTION A-A

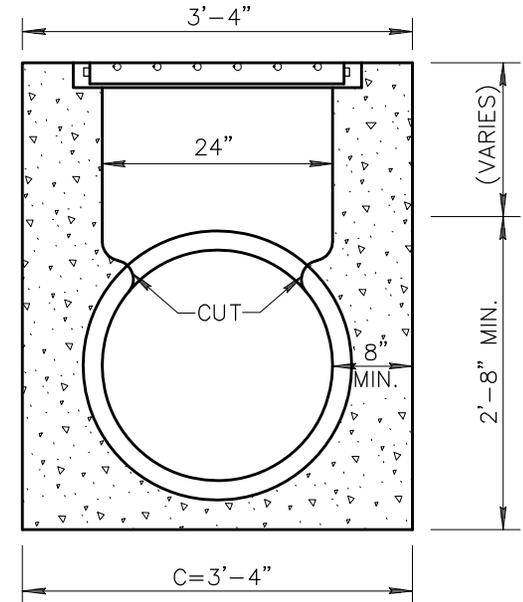

SECTION A-A
24" PIPE (NOMINAL)

DETAIL NO.

538



STANDARD DETAIL
ENGLISH


CATCH BASIN - TYPE 'H'

REVISIONS

01-01-1998

DETAIL NO.

538

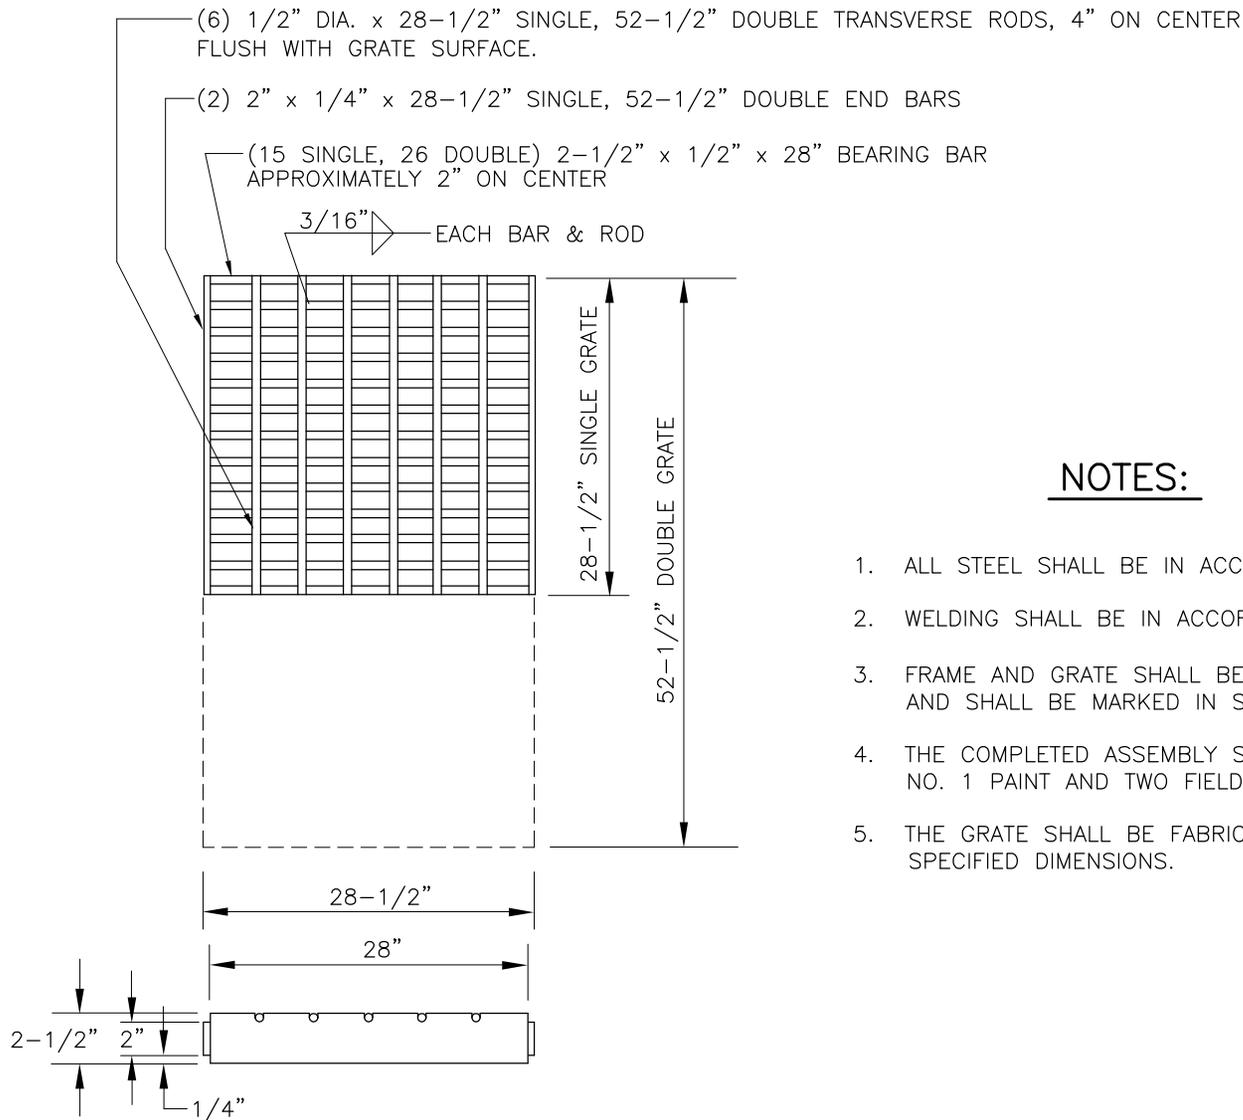

NOTES:

1. ALL STEEL SHALL BE IN ACCORDANCE WITH A.S.T.M. A-36.
2. WELDING SHALL BE IN ACCORDANCE WITH A.W.S. SPECIFICATIONS.
3. FRAME AND GRATE SHALL BE TESTED FOR ACCURACY OF FIT AND SHALL BE MARKED IN SETS BEFORE DELIVERY.
4. THE COMPLETED ASSEMBLY SHALL BE GIVEN ONE SHOP COAT OF NO. 1 PAINT AND TWO FIELD COATS OF NO. 10 PAINT AS PER SECTION 790.
5. THE GRATE SHALL BE FABRICATED TO WITHIN 1/8" SPECIFIED DIMENSIONS.

DETAIL NO.

539



STANDARD DETAIL
ENGLISH


GRATES FOR CATCH BASINS,
TYPE G AND H

REVISED


01-01-1998

DETAIL NO.


539

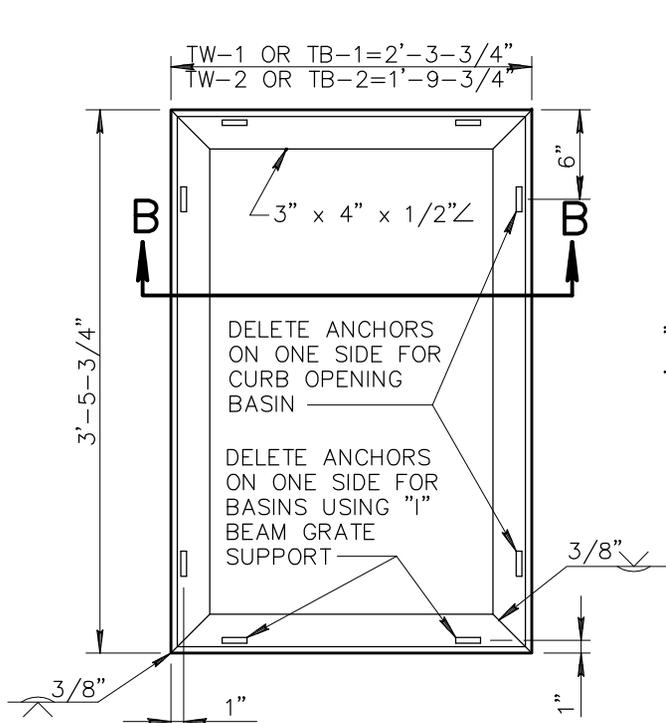


PLAN I

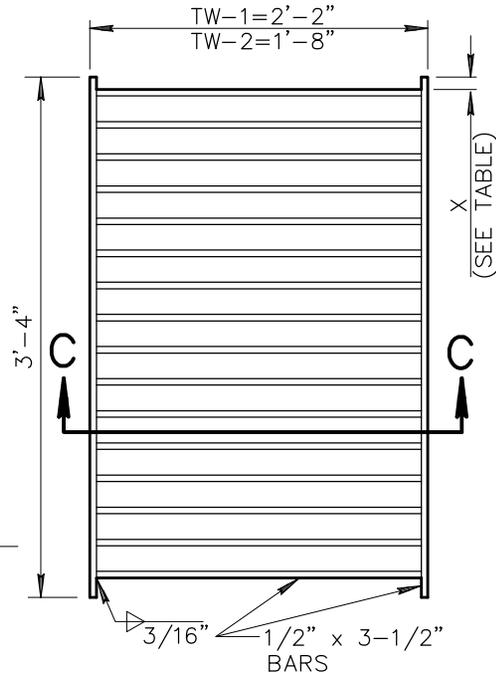


PLAN IA

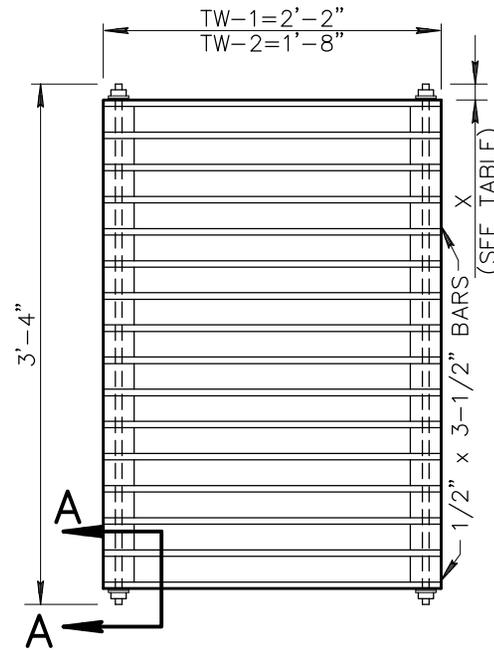


PLAN IB

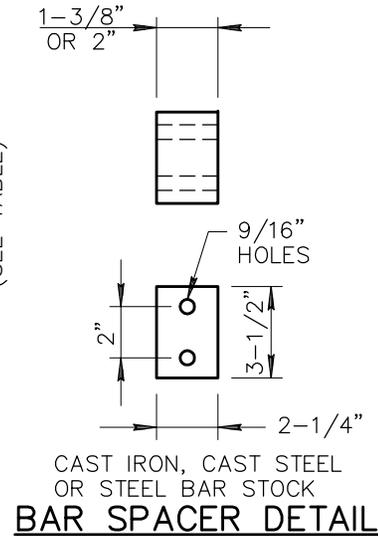

BAR SPACER DETAIL

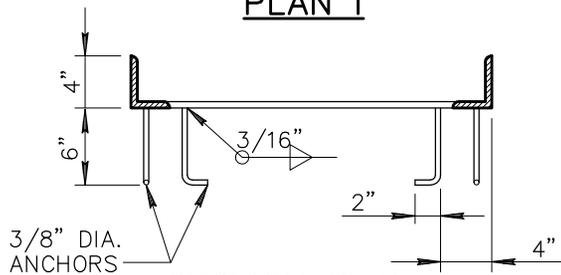


SECTION B-B

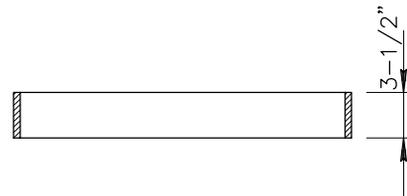

SECTION C-C

GRATE TYPES TW-1 AND TW-2

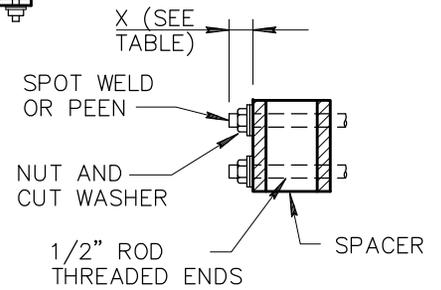

SECTION A-A

GRATE TYPES TB-1 AND TB-2

NOTES:

1. GRATING UNITS AND FRAMES SHALL BE FABRICATED FROM STRUCTURAL STEEL EXCEPT AS NOTED.
2. WELDING SHALL BE IN ACCORDANCE WITH STD. WELDING SPECS.
3. THE COMPLETED ASSEMBLY SHALL BE GIVEN TWO SHOP COATS OF NO. 1 PAINT AS PER SECT. 790.
4. FRAME AND GRATE SHALL FIT TO A MAX. ROCK OF 0.093" AT ANY POINT.
5. RESTRICT USE TO GRADES OF 3% OR LESS.

BAR TABLE				
TYPE	CLEAR SPACING	NO. BARS	X	GRATE OPENING ft ²
TW OR TB-1.0	1"	26	1"	3.21
TW OR TB-1.1	1-3/8"	21	1"	3.32
TW OR TB-1.2	2"	16	1"	4.66
TW OR TB-2.0	1"	26	1"	2.32
TW OR TB-2.1	1-3/8"	21	1"	2.41
TW OR TB-2.2	2"	16	1"	2.65

TW INDICATES TRANSVERSE WELDED
TB INDICATES TRANSVERSE BOLTED

DETAIL NO.

540-1



STANDARD DETAIL
ENGLISH


CATCH BASIN GRATES

REVISED


01-01-1998

DETAIL NO.


540-1

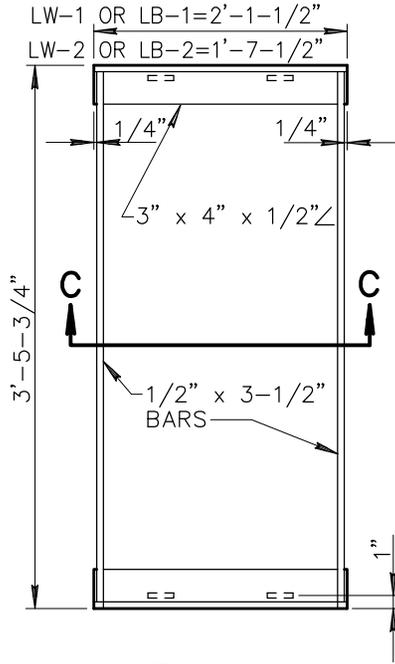


PLAN II

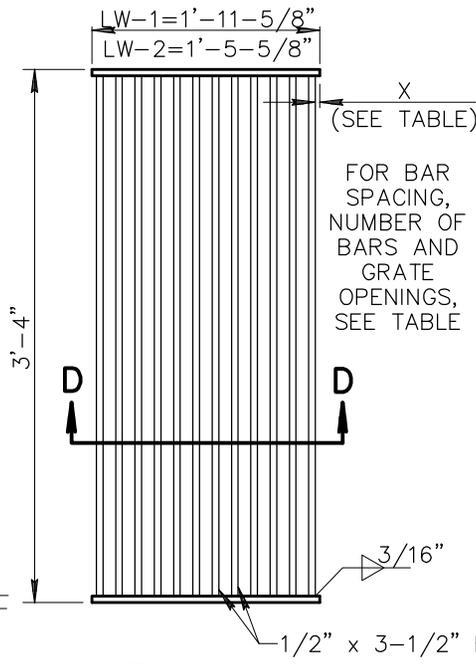

PLAN IIA

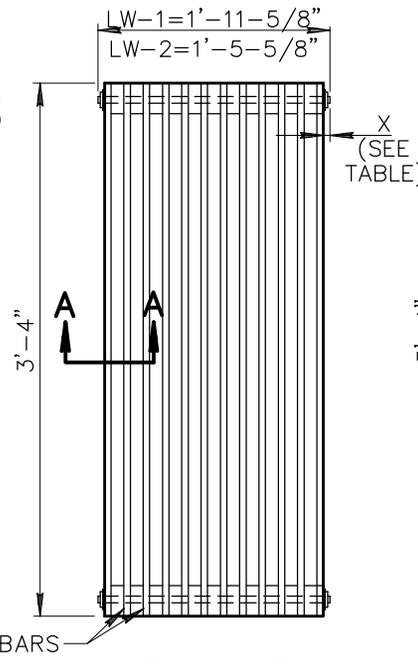


PLAN IIB

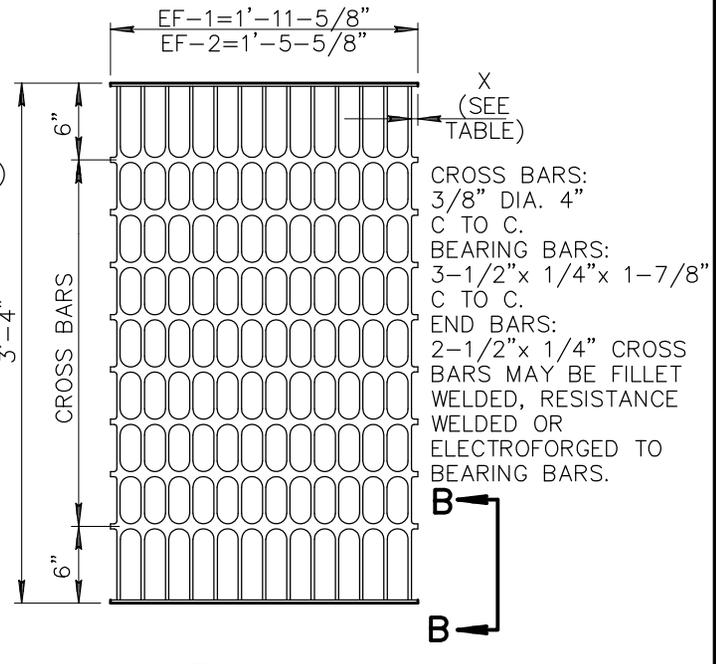


PLAN II

FOR BAR SPACING, NUMBER OF BARS AND GRATE OPENINGS, SEE TABLE


CROSS BARS: 3/8" DIA. 4" C TO C.
 BEARING BARS: 3-1/2" x 1/4" x 1-7/8" C TO C.
 END BARS: 2-1/2" x 1/4" CROSS BARS MAY BE FILLET WELDED, RESISTANCE WELDED OR ELECTROFORGED TO BEARING BARS.

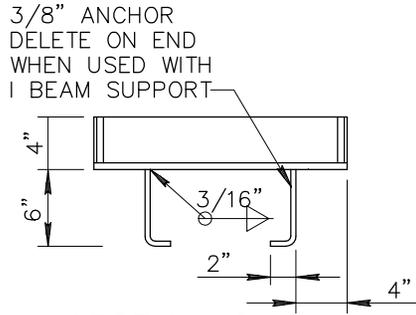


SECTION C-C



SECTION D-D

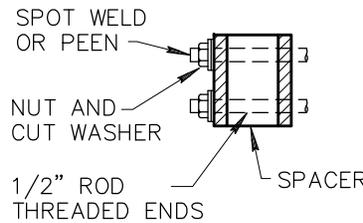


SECTION A-A



SECTION B-B

NOTES:

- LW INDICATES LONGITUDINAL WELDED.
- LB INDICATES LONGITUDINAL BOLTED.
- EF INDICATES ELECTROFORGED.
- GRATING UNITS AND FRAMES SHALL BE FABRICATED FROM STRUCTURAL STEEL 'A-36 EXCEPT AS NOTED.
- ALL WELDING SHALL BE IN ACCORDANCE WITH STANDARD WELDING SPECIFICATIONS.
- THE COMPLETED ASSEMBLY SHALL BE GIVEN ONE SHOP COAT OF NO. 1 PAINT.
- FRAMES AND GRATES SHALL FIT TO A MAXIMUM ROCK OF 0.093" AT ANY POINT.
- GRATE TYPE LW AND EF RESTRICTED TO SLOPES OF 3% OR LESS
- GRATES TYPE LB USE LONGITUDINAL GRADES IN EXCESS OF 3% OR AS AN ALTERNATE TO TYPES LW OR EF ON GRADES OF 3% OR LESS.

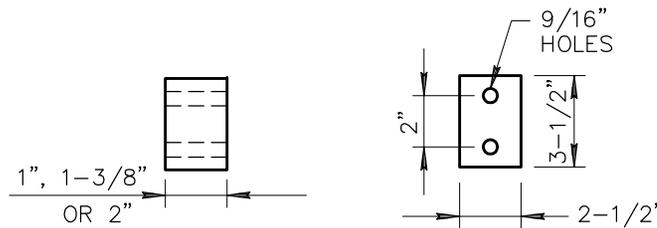


BAR SPACER DETAIL

CAST IRON, CAST STEEL OR STEEL BAR STOCK


GRATE TYPE	CLEAR BAR SPACING	NO. BARS	X	GRATE OPENING ft ²
LW OR LB-1.0	1"	16	5/16"	3.97
LW OR LB-1.1	1-3/8"	13	5/16"	4.34
LW OR LB-1.2	2"	9	1-9/16"	4.84
EF-1	1-5/8"	13	7/16"	4.66
LW OR LB-2.0	1"	12	5/16"	2.98
LW OR LB-2.1	1-3/8"	9	1-1/16"	3.35
LW OR LB-2.2	2"	7	1-1/16"	3.60
EF-2	1-5/16"	10	1/4"	3.48

NOTES:

1. INSTALL WHEN REQUIRED BY PLANS, SPECIFICATIONS, OR APPROVED BY THE ENGINEER.
2. SEE PROJECT PLANS FOR CATCH BASIN DETAILS AND PAVEMENT STRUCTURAL SECTION.

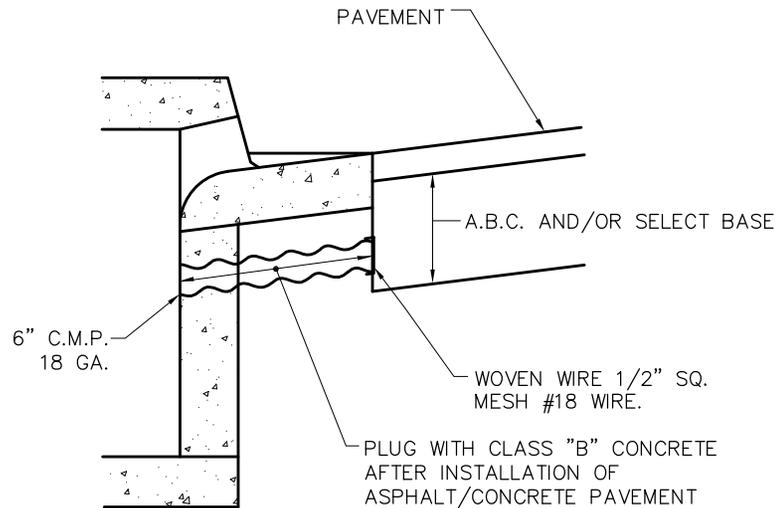

CURB OPENING INLET

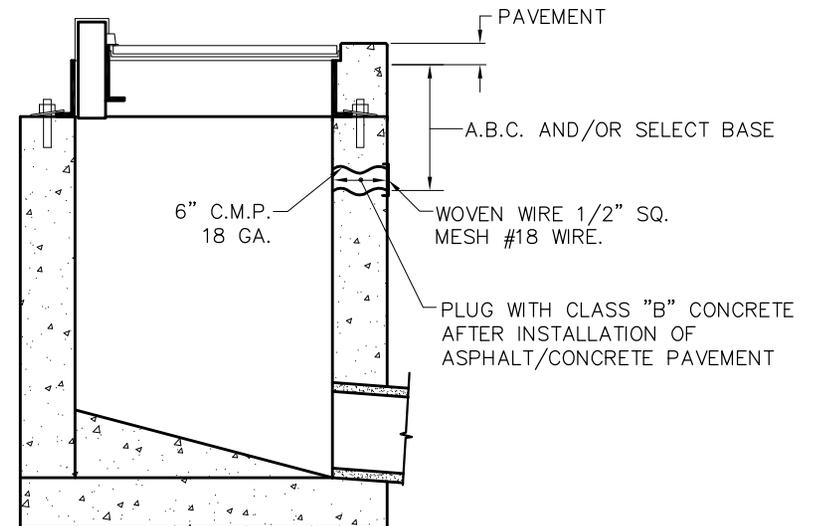

GRATE OPENING INLET

DETAIL NO.

541



STANDARD DETAIL
ENGLISH

CATCH BASIN SUBGRADE DRAIN

REVISED

01-01-2005







DETAIL NO.

541

PIPE DIA.	APPROX. WEIGHT (LBS.)	DIMENSIONS - INCHES						APPROX. SLOPE
		T	A	B	C	E	F	
24"	1520	3	9-1/2	43-1/2	30	73-1/2	48	3
27"	1930	3-1/4	10-1/2	49-1/2	24	73-1/2	54	3
30"	2190	3-1/2	12	54	19-3/4	73-3/4	60	3
36"	4100	4	15	63	34-3/4	97-3/4	72	3
42"	5380	4-1/2	21	63	35	98	78	3
48"	6550	5	24	72	26	98	84	3
54"	8240	5-1/2	27	65	33-1/4	98-1/4"	90	2 1/2

NOTES

1. DESIGN OF END SECTION SHALL CONFORM TO STANDARD FOR REINFORCED CONCRETE PIPE.
2. END SECTION JOINT CONFORMATION SHALL MATCH THE PIPE JOINTS.
3. EMBANKMENT SLOPE SHALL BE WARPED TO MATCH SLOPE OF END SECTION.
4. CULVERT LENGTH IS AS SHOWN ON PLANS.

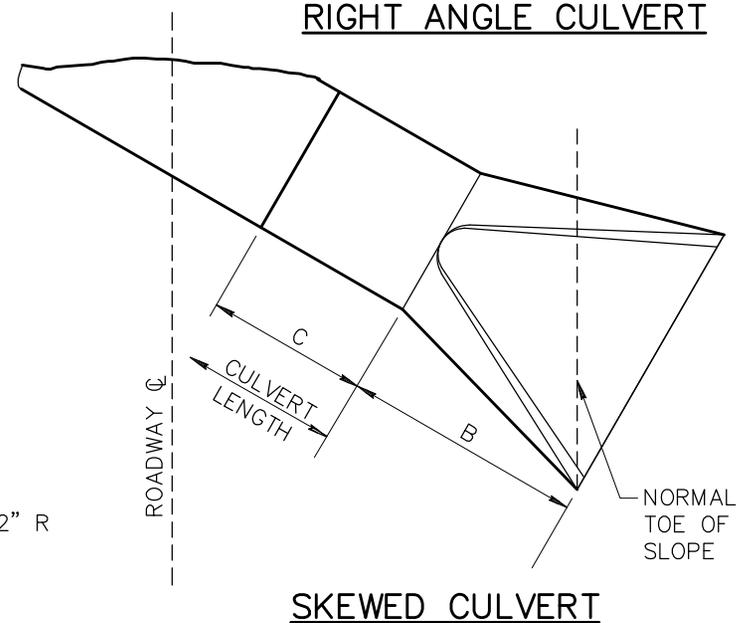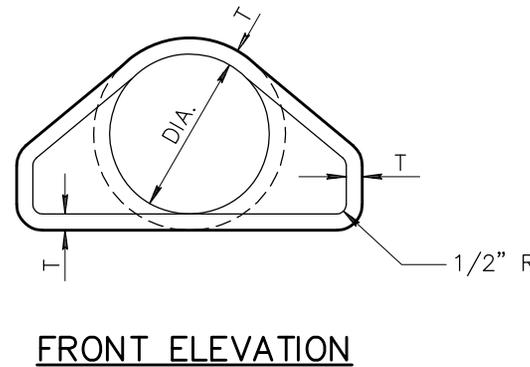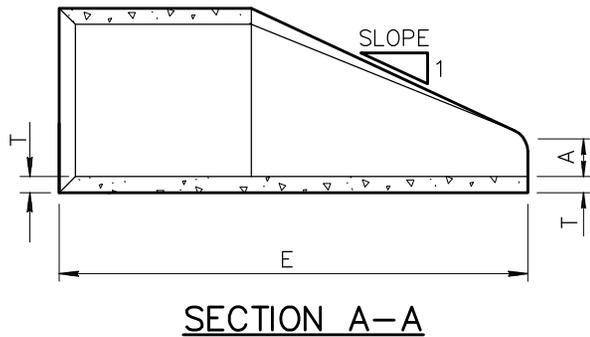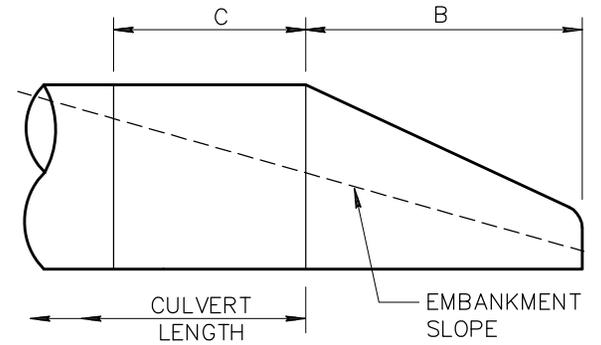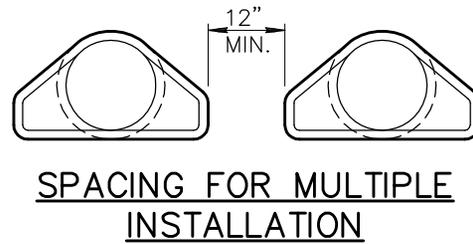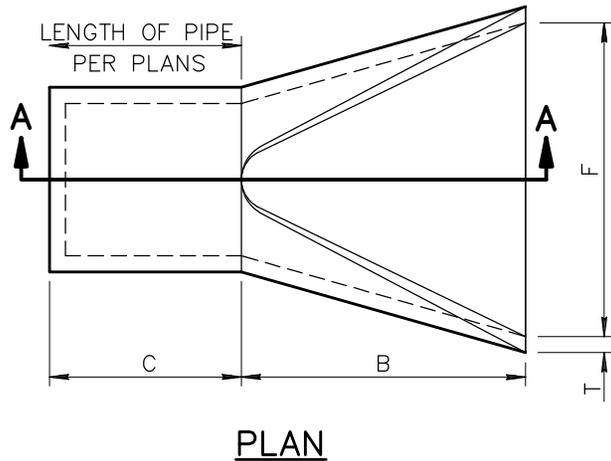

DETAIL NO.

545




STANDARD DETAIL
ENGLISH

END SECTION-REINFORCED CONCRETE PIPE

REVISED
01-01-1998


DETAIL NO.

545

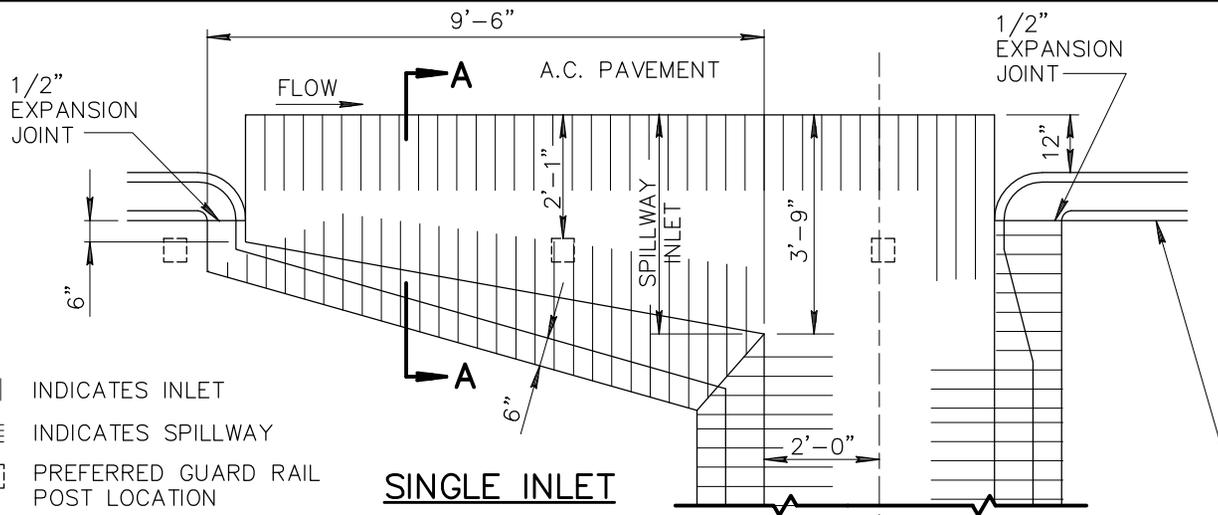


|||| INDICATES INLET
 |||| INDICATES SPILLWAY
 □ PREFERRED GUARD RAIL POST LOCATION

SINGLE INLET

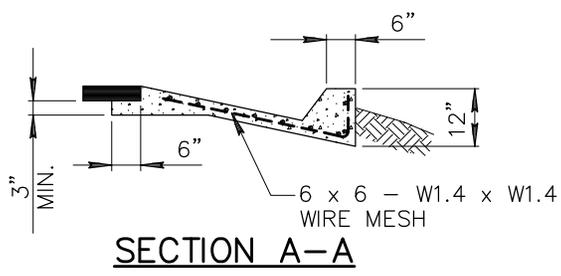


SECTION A-A

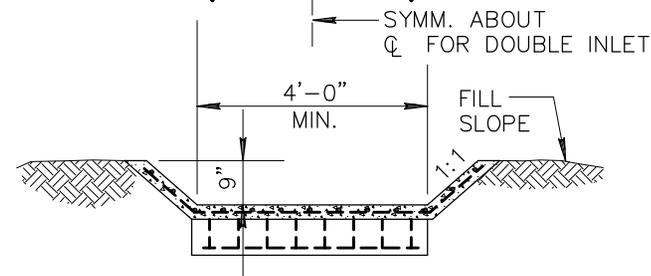


SPILLWAY SECTION

NOTES:


1. WHERE ROCK IS ENCOUNTERED THE OUTLET MAY BE OMITTED.
2. ALL PORTIONS OF SPILLWAY TO BE TROWEL FINISHED.
3. CONCRETE FOR THE SPILLWAY INLET, SPILLWAY AND OUTLET SHALL BE CLASS 'B' PER SECT. 725.
4. WHEN THE OUTLET IS USED, THE WIRE MESH SHALL EXTEND THROUGH THE JOINT INTO THE OUTLET IN LIEU OF BENDING INTO THE KEY.

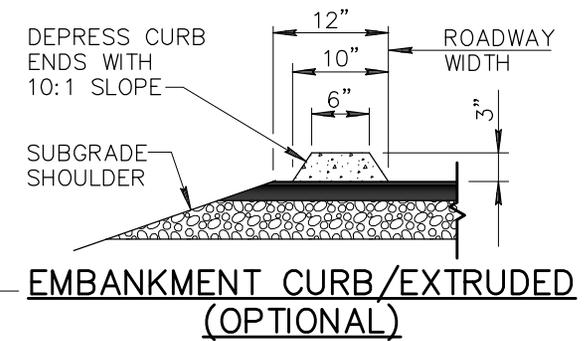

EMBANKMENT CURB/EXTRUDED (OPTIONAL)

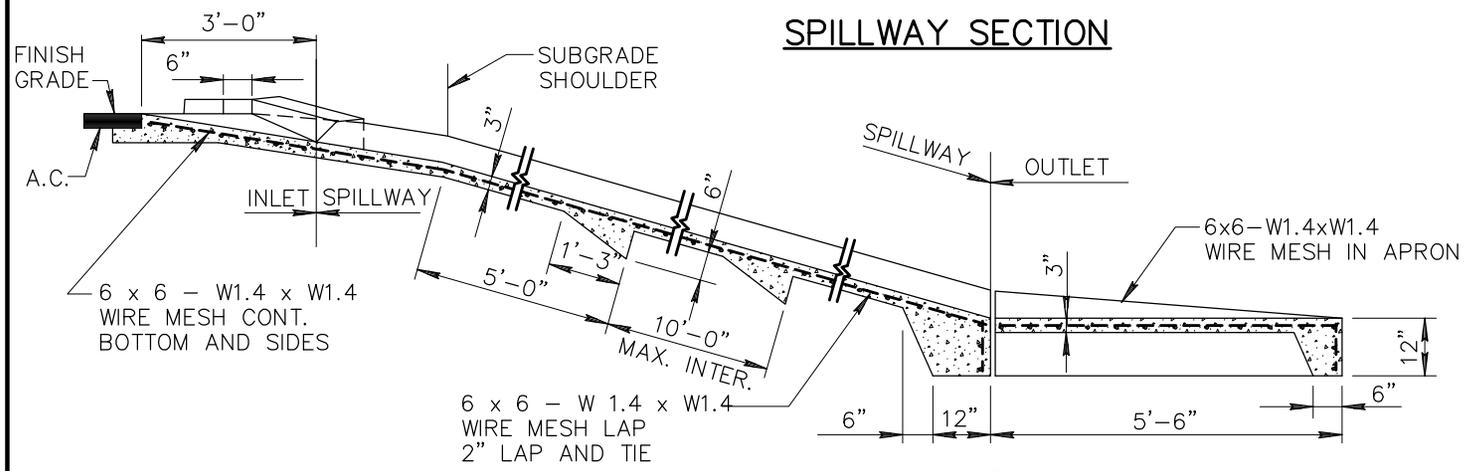

SECTION ON SPILLWAY Q DOUBLE INLET

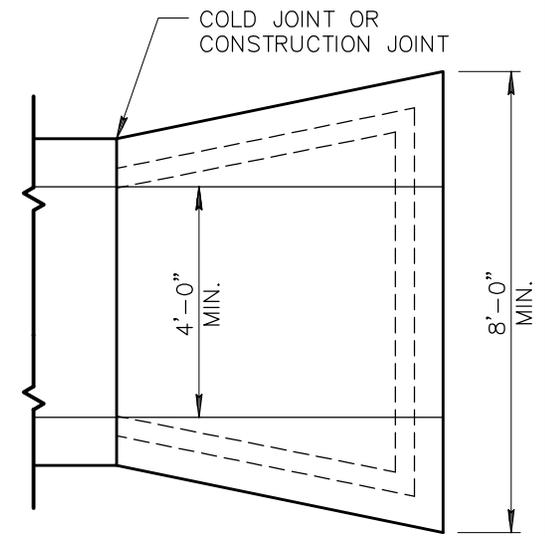

DETAIL NO.
550




STANDARD DETAIL
ENGLISH

SPILLWAY INLET AND OUTLET


REVISED
01-01-1998

DETAIL NO.
550

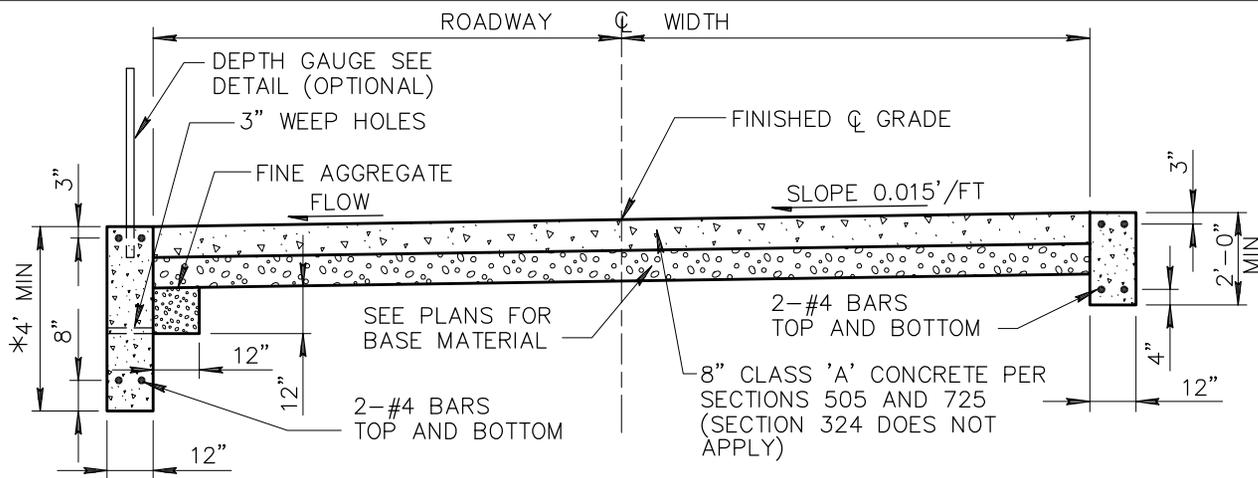


CONCRETE SURFACE FORD CONCRETE WALLS

*MIN. DISTANCE BELOW STREAM BED

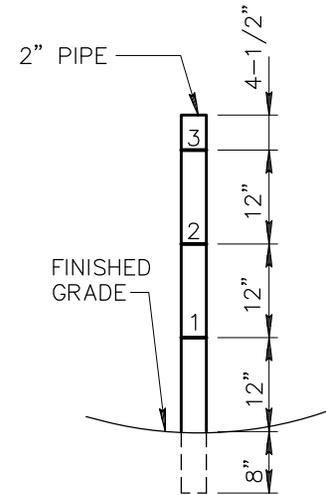


DEPTH GAUGE DETAIL
(OPTION OF THE CONTRACTING AGENCY)

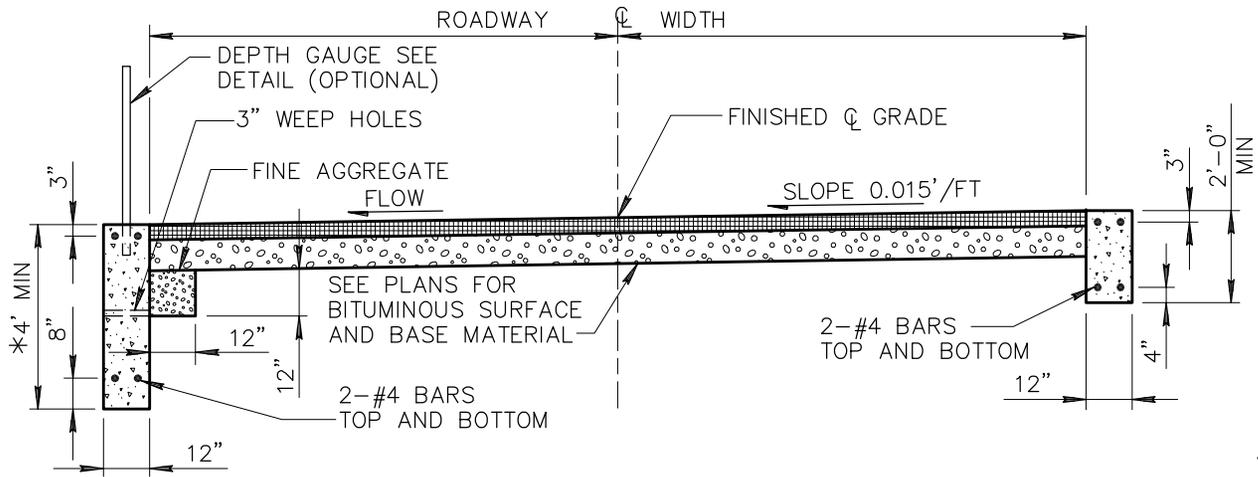

BITUMINOUS SURFACE FORD CONCRETE WALLS

NOTES:

1. FORD WALLS SHALL BE CLASS 'A' CONCRETE PER SECT. 725.
2. DEPTH GAUGE SHALL BE PAINTED 2 COATS WHITE ENAMEL. NUMERALS AND MARKERS SHALL BE 1 COAT BLACK ENAMEL.
3. NUMBERS ON DEPTH GAUGE TO BE 2" HIGH.
4. HEIGHT OF DEPTH GAUGE OPTIONAL.
5. TWO DEPTH GAUGES MAY BE USED. ONE ON EACH END OF UPSTREAM WALL. START WITH 2' INSTEAD OF 1'.

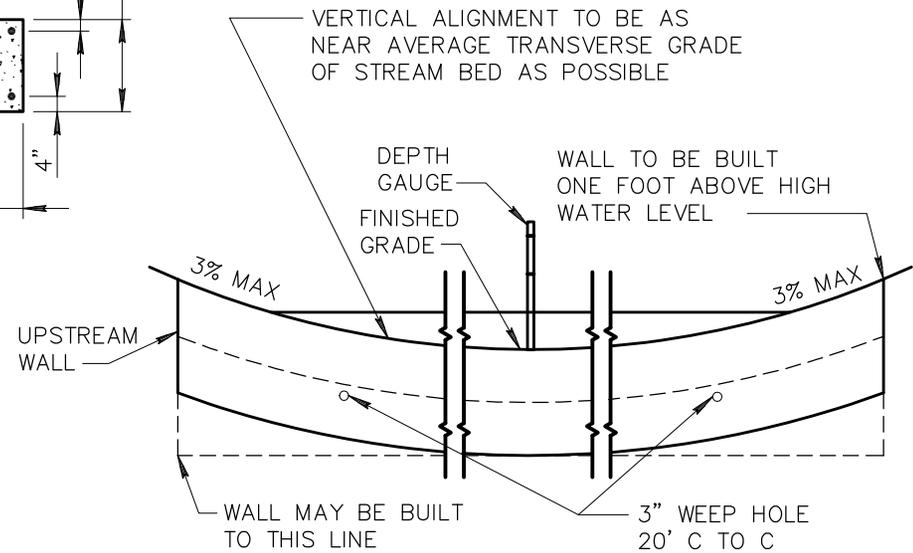

ELEVATION LOOKING UPSTREAM

DETAIL NO.

552



STANDARD DETAIL
ENGLISH

CONCRETE CUT-OFF WALLS



REVISED

01-01-2009

DETAIL NO.

552

TYPICAL GABIONS

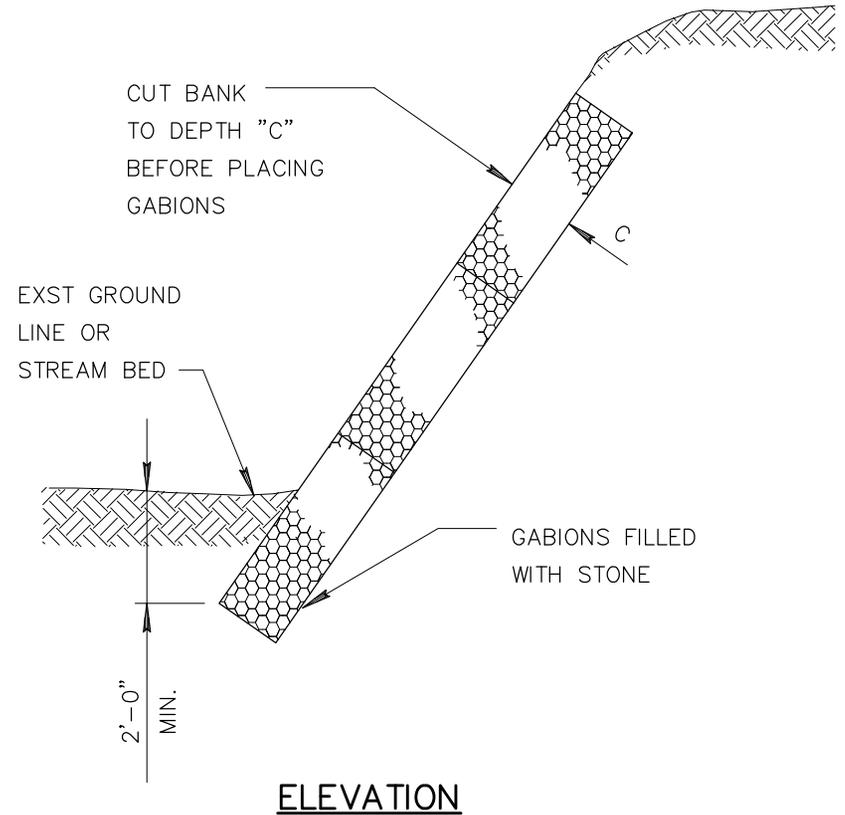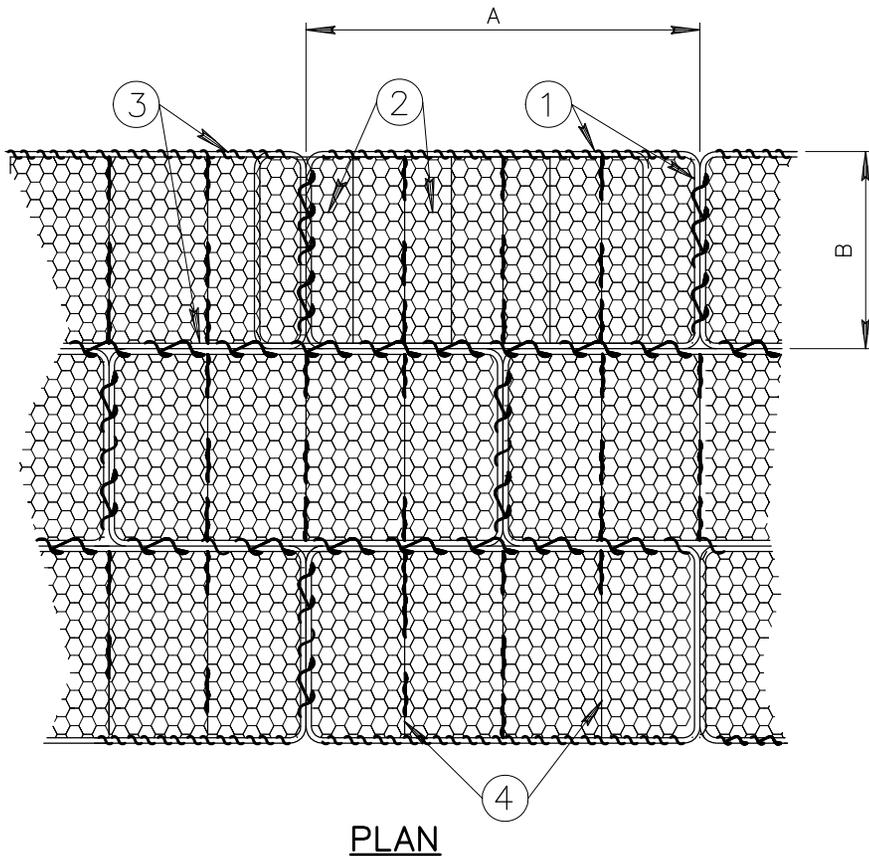

- ① HEAVY GAUGE FRAME WIRE.
- ② HEAVY GAUGE TRIPLE-TWIST HEXAGONAL MESH (OR EQUAL) FASTENED TO FRAME WIRE.
- ③ CONTINUOUS HEAVY GAUGE WRAPPED AROUND FRAMES TO FASTEN GABIONS TO EACH OTHER.
- ④ PARTITIONS TO PREVENT SHIFTING, NORMALLY ONE PER 3' LENGTH. INSTALLED AT FACTORY.

NOMINAL SIZE COMBINATIONS		
LENGTH	WIDTH	DEPTH
A	B	C
6'	3'	1' 1.5' 3'
9'	3'	1' 1.5' 3'
12'	3'	1' 1.5' 3'

NOTE:

OTHER SIZES AVAILABLE FROM MANUFACTURER.